

03/31/99  
JC649 U.S. PTO

PATENT

Docket No.3701-4000

Express Mail Label No. EJ607480444US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY APPLICATION AND APPLICATION FEE TRANSMITTAL (1.53(b))

ASSISTANT COMMISSIONER FOR PATENTS  
Box Patent Application  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

jc135 U.S. PTO  
09/282303  
03/31/99

Named Inventor(s) and  
Address(es):

Jes Broeng, Norgaardsvej 22B, 1. tv, DK-2800, Lyngby, Denmark

Stig Eigil Barkou, Lyngbyvej 431 B, 1. tv, DK-2820, Gentofte, Denmark

Anders Overgaard Bjarklev, Ørebjergvej 5, Gundsomagle, DK-4000, Roskilde,  
Denmark

Title

A PHOTONIC BAND GAP FIBER

Enclosed are:

[X] 53 page(s) of specification, 1 page(s) of Abstract, 24 page(s) of claims

[X] 82 sheets of drawing [ ] formal [X] informal

[ ] page(s) of Declaration and Power of Attorney

[ ] Unsigned

[ ] Newly Executed

[ ] Copy from prior application

[ ] Deletion of inventors including Signed Statement under 37 C.F.R. § 1.63(d)(2)

[ ] Incorporation by Reference: The entire disclosure of the prior application, from which a copy of the combined declaration and power of attorney is supplied herein, is considered as being part of the disclosure of the accompanying application and is incorporated herein by reference.

[ ] Microfiche Computer Program (Appendix)

[ ] page(s) of Sequence Listing

[ ] computer readable disk containing Sequence Listing

[ ] Statement under 37 C.F.R. § 1.821(f) that computer and paper copies of the Sequence Listing are the same

[ ] Claim for Priority

[ ] Certified copy of Priority Document(s)



- ☐ English translation documents
- ☒ Information Disclosure Statement
- ☐ Copy of \_\_\_\_ cited references
- ☐ Copy of PTO-1449 filed in parent application serial No. \_\_\_\_\_.
- ☐ Preliminary Amendment
- ☒ Return receipt postcard (MPEP 503)
- ☐ Assignment Papers (assignment cover sheet and assignment documents)
- ☐ Charge Fee(s) to Deposit Account No. 13-4500. Order No. \_\_\_\_\_. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.
- ☐ Assignment papers filed in parent application Serial No. \_\_\_\_\_.
- ☐ Certification of chain of title pursuant to 37 C.F.R. § 3.73(b).
- ☒ Priority of Dutch Application No. DK PA 1998 00779, filed on June 9, 1998 is claimed under 35 U.S.C. § 119.
- ☐ Cancel in this application original claims \_\_\_\_\_ of the parent application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☐ A preliminary Amendment is enclosed. (Claims added by this Amendment have been properly numbered consecutively beginning with the number following the highest numbered original claim in the prior application.
- ☐ The status of the parent application is as follows:
- ☐ A Petition For Extension of Time and a Fee therefor has been or is being filed in the parent application to extend the term for action in the parent application until \_\_\_\_\_.
- ☐ A copy of the Petition for Extension of Time in the co-pending parent application is attached.
- ☐ No Petition For Extension of Time and Fee therefor are necessary in the co-pending parent application.
- ☐ Please abandon the parent application at a time while the parent application is pending or at a time when the petition for extension of time in that application is granted and while this application is pending has been granted a filing date, so as to make this application co-pending.
- ☐ Transfer the drawing(s) from the patent application to this application.
- ☐ Amend the specification by inserting before the first line the sentence:



I. CALCULATION OF APPLICATION FEE (For Other Than A Small Entity)

	Number Filed		Number Extra	Rate	Basic Fee
					\$760.00
Total Claims	135	-20=	115	x\$18.00	\$ 2070.00
Independent Claims	11	- 3=	8	X\$78.00	\$ 624.00
Multiple Dependent Claims	<input type="checkbox"/> yes		Additional Fee =	\$260.00	\$0
	<input checked="" type="checkbox"/> no		Add'l Fee =	NONE	

Total: \$ 3454.00

- ☒ A statement claiming small entity status is attached or will be filed in the above-identified parent application and its benefit under 37 C.F.R. § 1.28(a) is hereby claimed. Reduced fees under 37 C.F.R. § 1.9(F) (50% of total) paid herewith \$1727.00.
- ☒ A check in the amount of \$ 1727.00 in payment of the application filing fee is attached.
- ☐ Charge Fee(s) to Deposit Account No. 13-4500. Order No.3701-4000. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.
- ☒ The Assistant Commissioner is hereby authorized to charge any additional fees which may be required for filing this application, or credit any overpayment to Deposit Account No. 13-4500, Order No. 3701-4000. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

Respectfully submitted,

MORGAN & FINNEGAN, L.L.P.

By:

Walter Hanchuk  
Registration No. 35,179

Dated: March 31, 1999

CORRESPONDENCE ADDRESS:  
MORGAN & FINNEGAN, L.L.P.  
345 Park Avenue  
New York, New York 10154  
(212) 758-4800  
(212) 751-6849 Facsimile

FORM: UTL-TRAN.NY  
Rev. 11/13/98



UNITED STATES PATENT APPLICATION

FOR

A PHOTONIC BAND GAP FIBER

BY

Jes Broeng  
Stig Eigil Barkou  
Anders Overgaard Bjarklev

Express Mail Label No.  
EJ607480444US



## A PHOTONIC BAND GAP FIBRE

### FIELD OF INVENTION

5

The present invention relates to a novel group of cladding designs, especially for use in optical fibres, wherein a larger photonic band gap may be provided while retaining the stability and physical properties of the fibre.

### 10 BACKGROUND OF THE INVENTION

Optical fibres and integrated optical waveguides are today applied in a wide range of applications within areas such as optical communications, sensor technology, spectroscopy, and medicine. These waveguides normally operate by guiding the  
15 electromagnetic field (the light or the photons) through a physical effect, which is known as total internal reflection. By using this fundamental effect, the propagation (or loss) of optical power in directions perpendicular to the waveguide axis is reduced.

In order to obtain total internal reflection in these waveguides, which are often fabricated  
20 from dielectric materials (in optical fibres) or semiconductors (in integrated optics), it is necessary to use a higher refractive index of the core compared to the refractive index of the surrounding cladding.

Today the preferred signal transmission medium over long and medium distances is the  
25 optical fibre, and total internal reflection is, consequently, a physical property, which has been known and used in technological development for decades. During the past ten years, however, the development within the area of new materials has opened up the possibilities of localisation of light or control of electromagnetic fields in cavities or waveguides by applying a completely new physical property - the so-called photonic band  
30 gap (PBG) effect.

The PBG effect may be introduced by providing a spatially periodic lattice structure, in which the lattice dimensions and applied materials are chosen in such a way that electromagnetic field propagation is inhibited in certain frequency intervals and in certain  
35 directions. These PBG materials have been described in one-, two-, and three-dimensional



cases in the scientific literature and in several patents (see for instance US-Patent no. 5386215, US-Patent no. 5335240, US-Patent no. 5440421, US-Patent no. 5600483, US-Patent no. 5172267, US-Patent no. 5559825).

- 5 A specific class of components, which makes use of such periodic dielectric structures, are the optical fibres (or waveguides), in which the periodic variation appears in directions perpendicular to the waveguide axes, whereas the structures are invariant along the waveguide axes.
- 10 Within recent years, especially researchers from University of Bath, UK, (see e.g. Birks et al., Electronics Letters, Vol.31 (22), p.1941, October 1995) have presented such fibres realised by having a silica core surrounded by thin, parallel, and air-filled voids in a silica-background material, and organising the air-filled voids in a triangular structure in the cladding region of the fibres. These optical fibres have demonstrated interesting
- 15 propagation properties compared to standard optical fibres utilising total internal reflection.

- It may be a problem or disadvantage of this particular realisation of optical fibres with periodic dielectric cladding regions that careful stacking of either hexagonal glass tubes (with central holes) or direct stacking of thin circular tubes is required. These tubes have
- 20 been arranged in a triangular structure in a preform, where after the preform is drawn into an optical fibre. Although these fibres according to the reports in the international literature show quite specific and new optical properties, one of the problems has been that the core of the fibre could only be formed by introduction of a glass rod without a central hole.
  - 25 It is a further disadvantage that even these new fibres have core areas with higher refractive index than the average refractive index of the surrounding media, and their waveguiding effect may, consequently, also be described by conventional total internal reflection. This naturally has the consequence that for applications within areas such as optical sensors, where it may be of specific interest to be able to localise optical fields in
  - 30 and around areas with low refractive indices (e.g., around air-filled channels), the presently known fibres may not be used directly.

- It is a still further disadvantage that, due to the triangular cladding structure, the PBG of the structures described by Birks et al. are not optimised for guiding electromagnetic radiation
- 35 using the PBG effect.



US 5,802,236 discloses micro-fabricated optical fibres having a core and a cladding region, wherein the cladding region comprises a multiplicity of spaced apart cladding features that are elongated in the direction of the fibre. The effective refractive index of the cladding  
5 region is less than the effective refractive index of the core region. Furthermore, the elongated features in the cladding are arranged in a non-periodic structure.

It is a disadvantage of the micro-fabricated optical fibre disclosed in US 5,802,236 that due to the high-index core region the waveguiding characteristics are based on traditional total  
10 internal reflection of the electromagnetic radiation guided in the core region.

WO 99/00685 discloses a large core photonic crystal fibre (PCF) comprising a cladding having a triangular periodic structure. The core region may be either a high-index or low-index region having a diameter of at least 5  $\mu\text{m}$ . In a preferred embodiment the core region  
15 may be as large as 50  $\mu\text{m}$  in diameter. With such a diameter, the fibre is capable of transmitting high powers, whilst maintaining single-mode operation.

It is a disadvantage that the triangular cladding structure disclosed in WO 99/00685 will not, using realistic manufacturing parameters, provide a sufficient PBG so as to effectively  
20 confine visible or NIR electromagnetic radiation within the core region of the fibre.

It is a further disadvantage of the structure disclosed in WO 99/00685 that in order to obtain a sufficient PBG, the dimensions of the features forming the triangular periodic structure must be very large. Such large features, e.g. air-filled holes, make the structure  
25 difficult to manufacture and inconvenient for practical applications.

It is an object of the present invention to provide a new class of optical waveguides, in which waveguiding along one or more core regions is obtained through the application of the PBG effect.  
30

It is a further object of the present invention to provide a two-dimensional lattice structure capable of providing complete PBG's for realistic manufacturing parameters.

It is a still further object of the present invention to provide low-index core PBG  
35 waveguiding structures.



It is a still further object of the present invention to provide a PBG structure, which is easy to manufacture.

#### SUMMARY OF THE INVENTION

5

The present inventors have realised that the photonic band gap of an optical fibre, which cladding structure is typically formed as two-dimensionally periodic low index areas within a given material, may be defined as a number of high index areas separated by the low index areas forming the periodic structure. The performance of the optical band gap may be  
 10 increased, if these high index areas are "separated" from each other. These areas couple via areas ("bridges") between the low index areas, and this "separation" may be obtained in a number of areas.

In the following, naturally a periodic structure will be defined by a primitive unit cell, as is  
 15 the most widely used manner of simplifying the analysis of such a structure. However, the actual shape and contents of this cell may vary in relation to a structure more intuitively correct in analysing the high index areas. To that effect, we will make use of a polygon, which will be defined by low index areas but will normally define the position of a high index area.

20

It should be noted that many sizes of unit cells will exist but only one of a primitive unit cell which is defined as a unit cell which has the smallest area possible and which, only by translation, can generate the structure. Naturally, a given periodic structure may have a plurality of primitive unit cells.

25

In the following, the structure is defined by a unit cell, which will be identical to a primitive unit cell.

In a first aspect, the invention relates to a separation where additional low index areas are  
 30 provided in addition to those elements normally defining the periodic structure.

Thus, in this first aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

35 - a core region extending along the longitudinal direction.



- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by at least one unit cell, wherein, for each unit cell:

10

- a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and not enclosing any part of any primary elements, and
- one or more further elongated elements are provided each of which
  - has an area not exceeding 1/6 of the area of that primary element having its centre within the unit cell and having the largest area,
  - has a refractive index being lower than that of any material adjacent thereto,
  - has a centre not positioned outside the unit cell, and
  - does not cover the centre of the first circle.

20

In the present context, "substantially two-dimensionally periodic" will mean that it is desired to have an optimal periodicity, but that the manners of production will often alter this. In the prior art it is seen that when circular air holes (low index areas) are introduced into a preform of glass and subsequently drawn, the holes will obtain a not-circular shape which is a sign of this substantial periodicity.

25

Also, in the present context, the refractive index of the primary elements has to be lower than that of any material adjacent thereto, meaning that this actual change of index is that providing the periodic structure. This step is not dependent on changes of refractive indices outside the immediate area around the circumference of the primary elements. Naturally, this step may be different for all primary elements, but normally the material adjacent to the primary elements is the same throughout the structure - and so is that of the primary elements, whereby the step will be the same at all circumferences around the primary elements.

35



In this situation, the first circle will define a so-called high index area, even when the actual refractive index is that of all of the fibre (except for the primary elements).

In this situation, further low index areas may be provided. When positioned correctly, these  
 5 will separate the high index areas in that the coupling via the bridges is reduced due to the bridges being narrowed in effective area or width even when increased in number.

The effect of the further elements will, naturally, depend on the size thereof. If the size is increased beyond that of 1/6 of that of the primary elements, they will have an effect of  
 10 actually changing the periodicity and cell shape of the overall structure. However, it may be preferred that the one or more further elements each has an area not exceeding 1/8, such as an area not exceeding 1/10, such as an area not exceeding 1/12, such as an area not exceeding 1/15, such as an area not exceeding 1/30 of the area of that primary element having its centre not positioned outside the unit cell and having the largest area.

15 Instead of or in addition to the narrowing of the "bridges" in the structure, two high index areas may be separated by reducing the sizes thereof. The further elements may be used for that by positioning these in a specific manner: For the unit cell, a second circle is defined being the largest possible circle having its centre not positioned outside the unit  
 20 cell, and wherein the second circle not comprising any parts of the primary or further elongated elements, and wherein the area of the second circle is smaller than that of the first circle. In that manner, the further elements act to reduce the size of the high index area and thereby to separate two adjacent high index areas.

25 Preferably, the area of the second circle is 90% or less, such as 80% or less, such as 70% or less, such as 60% or less, such as 50% or less, such as 40%, such as 30% or less or less than that of the first circle.

Even though the positioning of the further elements may easily be so that the centres of the  
 30 first and second circles do not coincide, this would normally alter the symmetry of the structure and, thus, not be desired. Consequently, preferably the centre of first circle at least substantially coincides with the centre of the second circle.

The above-mentioned polygon, having three or more sides, is defined as having its vertices  
 35 at the centres of those primary elements, parts of which are within a distance of 1.5 or less,



such as 1.2 or less, such as 1.1 or less times the radius of the first circle from the centre of the first circle.

Preferably, due to the periodicity of the structure, the polygon is a regular polygon. This  
5 polygon may be a triangular, rectangular, quadratic, or hexagonal polygon.

Another manner of effecting the separation of the high index areas is to provide more low index areas than those used in the prior art.

10 Thus, in a second aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,

15 - a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the elongated elements,

20

the periodic structure being defined, in a cross-section perpendicular to the longitudinal direction, by a unit cell, wherein the sum of all areas of elongated elements, which areas are comprised within the unit cell, is larger than 1.2 times the area of that primary element having its centre axis not positioned outside the unit cell and having the largest area.

25

As mentioned above, these areas may be used either for reducing the sizes of the high index areas or for reducing the coupling there between via the bridges between the primary elements of the periodic structure. Preferably, the size of the high index areas is as large as possible, so the mostly preferred manner is to narrow the bridges by introducing

30 additional low index areas between two high index areas.

Preferably, the sum of all areas of elongated elements comprised within the unit cell is larger than 1.3, such as larger than 1.4, such as larger than 1.5, such as larger than 1.75, such as larger than 2, such as larger than 2.5 times the area of that primary element

35 having its centre axis not positioned outside the unit cell and having the largest area.



An additional manner of separating the high index areas is to increase the index thereof. Thus, preferably the periodic structure comprises secondary elongated elements having a refractive index being larger than that of any material adjacent thereto and to any material being adjacent to a primary element.

In that manner, for a unit cell, the sum of all areas of secondary elements within the unit cell is preferably larger than 1, such as larger than 1.1, such as larger than 1.2, such as larger than 1.3, such as larger than 1.4, such as larger than 1.5, such as larger than 1.75, such as larger than 2, such as larger than 2.5 times the area of a secondary element having its centre axis not positioned outside the unit cell and having the largest area.

Also, for a unit cell, the sum of all areas of secondary elements within the unit cell is preferably larger than 0.05, such as larger than 0.1, such as larger than 0.5, such as larger than 1., such as larger than 2, such as larger than 5, such as larger than 8, such as larger than 10, such as larger than 15, such as larger than 20, such as larger than 25 times the area of the primary element having its centre axis not positioned outside the unit cell and having the largest area.

In addition to the separation of the high index areas, another manner of increasing the performance of the band gap structure is to provide more circular cells or polygons. The inventors have realised that the optimum structure is one which "looks the same for light coming from all angles" in the cross sectional plane perpendicular to the longitudinal axis of the fibre.

Therefore, in a third aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having.

- a core region extending along the longitudinal direction,
- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,



the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by a unit cell, and where a polygon is defined:

- having centres of primary elements in its vertices,
- 5 - not enclosing any centres of other primary elements than those having their centres at the vertices of the polygon, and
- having an area less than or equal to that of the unit cell,

wherein a first circle is defined as the smallest circle possible having its centre positioned  
10 within the polygon, and which comprises the vertices of the polygon,

and wherein the area of the circle divided by the area of the polygon is less than 2.4, such as less than 1.5, such as less than 1.2.

15 For the known triangular structures, is relationship between the areas is 2.42. and for the preferred hexagonal 1.21.

in this context, the circle comprises the vertices of the polygon will mean that these vertices are within the circle or on the periphery thereof. When the polygon is a regular polygon, the  
20 first circle is that circumscribing the polygon.

Typically, the polygon has four or more sides, and it may be quadratic or a hexagonal polygon.

25 Yet another manner of quantifying the separation of the high index areas will relate to the interaction of the refractive indices and the distance between the high index areas and the "sizes of the bridges".

Therefore, in a fourth aspect, the invention relates to an optical fibre with a waveguide  
30 structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,
  - a cladding region extending along the longitudinal direction, said cladding region
- 35 comprising an at least substantially two-dimensionally periodic structure comprising



primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

- 5 the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by a unit cell, wherein, for each unit cell:

$$n_d \Lambda_2 > n_{ud} \Lambda_1 (\sqrt{3})$$

where

- 10 -  $n_d$  is the largest index of refraction within a first circle which is defined as a largest circle possible having a centre not positioned outside the unit cell and not enclosing any part of any primary element,
- $n_{ud}$  is a largest index of refraction not positioned outside the unit cell but positioned outside any of the first circles of the unit cells,
- 15 -  $\Lambda_1$  is a smallest distance between centre axes of two primary elements within the periodic structure,
- $\Lambda_2$  is a smallest distance between the centres of two adjacent first circles.

- In this formula it is seen that the separation of high index areas may be effected by
- 20 narrowing the bridges, which may be obtained by providing more low index areas or providing a novel structure having a smaller distance by nature. Alternatively or in addition, the separation may be effected by physically separating the high index areas, such as is seen when going from the prior art triangular structure to the honeycomb structure. Also, an effective "separation" is seen when the high index area is, in fact, provided with a
- 25 refractive index higher than that of its surroundings.

- It should be understood that, naturally, the periodic structure only needs be that structure sufficient to confine light by the PBG effect. This distance may be 2-20 periods of the periodic structure - depending on the actual structure thereof. Outside that part of the fibre,
- 30 any structure or material may be provided.

In order to obtain an even better performance, it is preferred that, for each unit cell:  $n_d \Lambda_2 > 2 n_{ud} \Lambda_1$ , such as  $n_d \Lambda_2 > 3 n_{ud} \Lambda_1$ , such as  $n_d \Lambda_2 > 4 n_{ud} \Lambda_1$ , such as  $n_d \Lambda_2 > 6 n_{ud} \Lambda_1$ , such as  $n_d \Lambda_2 > 10 n_{ud} \Lambda_1$ .



Naturally, the more different materials in the fibre, the larger the complexity thereof. Thus, it may be desired that, in each unit cell,  $n_d$  is at least substantially identical to  $n_{ud}$ . However, the maximum index difference obtainable using materials standard in fibre manufacture may not be sufficient. In that situation, it may be desired that, in each unit cell,  $n_d > n_{ud}$ .

5

The present fibre may be made of any suitable material, and  $n_d$  and  $n_{ud}$  may consequently be chosen as a material having a refractive index in the interval from that of silica over polymers to semiconductors, that is, 1-10. A material standard in fibre manufacture is silica, whereby  $n_d$  and  $n_{ud}$  would normally be chosen in the interval 1.40-1.60 - naturally taking

10 into account the relationship between  $n_d$  and  $n_{ud}$ 

As described above, it has been found that the introduction of additional low index areas will further separate the high index areas and provide a fibre with an improved performance. Thus, preferably, the unit cell comprises further elongated elements each  
15 having a centre axis extending in the longitudinal direction of the waveguide, the cross-sectional area of each of the further elements being less than  $1/6$  of a cross-sectional area of that primary element, having its centre within the unit cell, having the largest cross-sectional area.

20 In that situation, it is advantageous that:

$$n_d \Lambda_2 > (\sqrt{3}) n_{ud} \Lambda_3$$

where

- 25 -  $n_d$  is the largest index of refraction within a first circle which is defined as a largest circle possible having a centre not positioned outside the unit cell and not enclosing any part of any primary element,
- $n_{ud}$  is a largest index of refraction not positioned outside the unit cell but outside any of the first circles of the unit cells,
- 30 -  $\Lambda_3$  is a smallest distance between centre axes of two primary or further elements within the periodic structure,
- $\Lambda_2$  is a smallest distance between the centres of two adjacent first circles.



Again, the better a separation, the better a performance, which means that it is preferred that, for each unit cell:  $n_d \Lambda_2 > 2 n_{ud} \Lambda_3$ , such as  $n_d \Lambda_2 > 3 n_{ud} \Lambda_3$ , such as  $n_d \Lambda_2 > 4 n_{ud} \Lambda_3$ , such as  $n_d \Lambda_2 > 6 n_{ud} \Lambda_3$ , such as  $n_d \Lambda_2 > 10 n_{ud} \Lambda_3$ .

- 5 Yet another manner of characterising the invention is one relating to the number of vertices or sides of the largest-area-polygons in the structure. In preferred fibres, these polygons are regular, whereby this number of sides or vertices will relate to the area thereof - and typically of an area or spacing of the high index areas.
- 10 Thus, in a fifth aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:
- a core region extending along the longitudinal direction,
  - 15 - a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,
  - 20 the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by at least one unit cell, wherein, for each unit cell, a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and not enclosing any part of any primary elements,
  - 25 wherein more than 3 first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle.
- If the polygon is regular, the primary elements defining the polygon will be positioned just
- 30 outside the perimeter of the circle. However, production methods will introduce uncertainties and displacements, whereby the distance between the circle and the elements may be larger or smaller.
- As mentioned above, both the circularity and the separation may be increased, if the
- 35 polygon is provided with more vertices than 3. Consequently, preferably more than 4, such



as more than 5, such as more than 6, such as more than 8, such as more than 10 first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle.

- 5 Also, if the production methods provide a reasonable control over displacements etc. in the manufacturing process, preferably the parts of the first primary elements exist within a distance of 1.1 or less times the radius of the first circle from the centre of the first circle.

Also, depending on the structure and manufacturing method, the centres of the primary  
10 elements may exist within the distance of 1.2 or less or 1.1 or less than the radius.

One manner of providing a certain number of first primary elements around a high index area will be to provide a polygon having the same number of vertices.

- 15 Another manner is one wherein certain first primary elements defining the vertices and others positioned along the sides thereof. In that situation, the first primary elements typically define a polygon having 3-6 sides and having centres of first primary elements in its vertices, each of the first primary elements not having centres in the vertices being positioned with its centre axis no further from a side of the polygon than  $1/5$ , such as  $1/10$ ,  
20 such as  $1/15$  of a length of that side.

Another manner of separating two high index areas will be to, instead of or in addition to providing low index areas in addition to those defining the basic periodic structure, provide the primary elements defining the basic periodic structure with a cross sectional shape  
25 increasing the separation between the high index areas.

Consequently, in a sixth aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- 30 - a core region extending along the longitudinal direction.
- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal



direction of the waveguide, each primary element having a refractive index being lower than a refractive index of any material adjacent to the primary element,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction,  
 5 defined by a unit cell, and where, for each unit cell, one or more polygons are defined as:

- a first polygon is defined as having its vertices at centres of first primary elements selected by:
  - defining a first circle as the largest circular area possible having a centre not  
 10 positioned outside the unit cell and not enclosing any part of any primary elements,
  - selecting the first primary elements as those having parts not positioned further away from the centre of the first circle than 1.2 times the radius of the first circle,
- for each area, if any, of the unit cell, which area is not comprised within a first  
 15 polygon, an additional polygon is defined as having its vertices at centres of additional primary elements selected by:
  - defining an additional circle as the largest circular area possible having a  
 centre not positioned outside the area and not enclosing any part of any primary  
 elements,
  - selecting the additional primary elements as those having their centres not  
 20 positioned further away from the centre of the additional circle than 1.2 times the radius of the additional circle,

the periodic structure comprising deviating primary elements having a shape deviating from  
 25 a circular shape and having extending parts defined as those parts of the shape of the deviating primary element extending outside a circle having the same area as that of the deviating primary element and having its centre at a centre of the deviating primary element, each extending part extending toward one of those primary elements which together with which the deviating primary element defines a side of a polygon in the  
 30 periodic structure,

each extending part extending toward a primary element and having an area being larger than 3 %, such as larger than 5%, such as larger than 10%, such as larger than 15%, such as larger than 20%, such as larger than 25% of the area of the circle.



In the present context, the centre of the deviating primary element will be a symmetrical centre of a centre of weight of the cross section thereof.

In the prior art, primary elements having a cross sectional shape deviating from that of a circle are known. However, those shapes have been inadvertent due to the methods of manufacture and often have a shape and direction detrimental to the periodicity of the structure and to the size of the band gap. The inventors have found that providing such shapes in the correct manner may increase the separation of the high index areas while maintaining the periodicity of the structure - in much the same manner as when providing additional low index areas along the circumference of the polygon.

Preferably, at least one extending part has an axis of symmetry at least substantially coinciding with a line intersecting the centre of the circle and the centre of a primary element with which the deviating primary element defines a side. In this manner, the extending part will point along the direction of a side of a polygon. The symmetry of the periodic structure may then especially be maintained, if all extending parts point in such directions.

Normally, such an axis of symmetry would be desirable, as the lack of a such will mean that the symmetry of the structure has been reduced. However manufacturing methods may render is slightly difficult to find this axis due to deformation of the extending part from the initially desired shape.

Intuitively, one would understand that the larger the portion of a polygon surrounding a high index area which is covered by low index areas, the better a separation of the high index areas. Thus, it is preferred that at least one extending part extends a distance of at least 5%, such as at least 10%, such as at least 15%, such as at least 20%, such as at least 30%, such as at least 50%, such as at least 75%, such as at least 100% of the radius of the circle and in a direction away from the centre of the circle

Again, a first circle may be defined as the smallest possible circle having its centre positioned within the first polygon, and which comprises the vertices of the first polygon, that is, the vertices are positioned within or on the boundary of the first circle.



Preferably, the first polygon has four or more sides, and most preferably, the first polygon is a hexagonal, regular polygon.

According to the invention, an especially preferred structure should be one that provides a  
 5 good separation between the high index areas and is relatively circular. One such shape is a rectangular shape which also has the advantage that it may itself fully define a periodic structure - or it may take part thereof.

Thus, in a seventh aspect, the invention relates to an optical fibre with a waveguide  
 10 structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,
- a cladding region extending along the longitudinal direction, said cladding region  
 15 comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements each having a refractive index being lower than a refractive index of any material adjacent to the primary element,
- 20 the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by a unit cell, and wherein a polygon is defined:
  - having centres of primary elements in its vertices,
  - not enclosing any centres of other primary elements than those having their centres at the vertices of the polygon, and
  - 25 - having an area less than or equal to that of the unit cell.

the polygon being a regular, hexagonal polygon.

In order to separate the high index areas even better, one or more further elongated  
 30 elements are preferably provided each of which

- has an area not exceeding 1/6 of the area of that primary element having its centre within the unit cell and having the largest area,
- has a refractive index being lower than that of any material adjacent thereto,

35 wherein symmetry may be preserved, if:



- further elements of two polygons sharing a common side are positioned symmetrically around a centre of the common side, and
- further elements of two polygons sharing a single primary element are positioned symmetrically around a centre of the single primary element.

5

As mentioned above, if the further elements are provided with an area larger than  $1/6$  of the area of that primary element having its centre within the unit cell (or at least not outside) and having the largest area, these further elements would reach a size where they would take part in the overall defining of the structure of the periodic structure - and thus be

10 primary elements

Preferably, the one or more further elongated elements each has an area not exceeding  $1/8$ , such as an area not exceeding  $1/10$ , such as an area not exceeding  $1/12$ , such as an area not exceeding  $1/15$  of the area of that primary element having its centre not positioned

15 outside the unit cell and having the largest area.

One specifically preferred embodiment is wherein, in the periodic structure, regular hexagonal polygons exist, all sides of which are shared with another regular hexagonal polygon. This corresponds to a honeycomb structure defined solely by regular hexagonals.

20

Another preferred embodiment is one wherein the structure is defined by the regular hexagonal polygon and a regular triangle having a side length corresponding to that of the regular hexagonal polygon, and wherein hexagonal polygons exist, each side of which is shared with a triangle. This is the so-called Kagomé structure.

25

In this second embodiment, the advantages of the hexagonal structure are maintained, and a further spacing of the high index areas defined in the hexagonals is provided via the triangles.

30 As mentioned above, another manner of obtaining an effective separation of the high index areas would be to increase the refractive index of such areas. Thus, in a number of the above aspects, it is preferred that the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a

35 centre axis extending in the longitudinal direction of the fibre.



Again, normally the material adjacent to the secondary elements would be the same as that adjacent to the primary elements.

- 5 In order to maintain the periodicity, it is desired that, for each unit cell, a secondary element is provided having its centre axis within the first circle, and more preferably that the secondary element is positioned so as to cover the centre of the first circle. Most preferably, the secondary element is positioned so as to have its centre axis at least substantially coincide with the centre of the first circle.

10

In an eighth aspect, the invention relates to an optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,
- 15
- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements each having a refractive index being
- 20 lower than a refractive index of any material adjacent to the primary element,

the periodic structure further comprising secondary, elongated elements each having a refractive index being larger than that of any material adjacent thereto and any material adjacent to a primary element, each secondary element having a centre axis extending in

25 the longitudinal direction of the fibre.

Normally, the periodic structure is, in a cross-section perpendicular to the longitudinal direction, defined by at least one unit cell, where, for each unit cell, a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and

30 not enclosing any part of any primary elements, where a secondary element is preferably provided having its centre axis within the first circle.

As mentioned above, desirably the secondary element is provided so as to cover the centre of the first circle, and preferably, the secondary element is provided so as to have its

35 centre axis at least substantially coincide with the centre of the first circle.



Also, the polygon may be defined as follows: a plurality of first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle, a polygon being defined as having its vertices at the centres of the plurality of first primary elements. Preferably, the polygon is a regular, hexagonal polygon.

This hexagonal polygon may be used in either the honeycomb structure or the Kagomé structure.

10 All the above aspects of the invention relate to specific cladding structures and comprise no limitations what so ever on the core region.

In fact, the invention should be taken as one relating to these specific cladding regions for use in any type of optical fibre in combination with one or more cores or core regions of any type.

Normally, in relation to band gap structures, the core is taken as an area of the structure, where the periodicity of the band gap structure is broken. The band gap structure is designed so as to make light transmission impossible, and an altering of the periodicity will, consequently, make light transmission possible - but only in the core region.

A number of different manners exist for defining the core. One manner is to replace one or more elements of the periodic structure with other elements with different refractive indices, cross sectional areas or shapes. Another manner is to have the core also have a periodic structure where only one or more elements are not present.

Preferably, the core region would comprise a first additional elongated element extending in the longitudinal direction of the fibre.

30 An especially preferred first additional element is constituted by air or gas and being defined as a void in the material of the fibre, such as a void having a cross sectional area in the cross section being at least one, such as at least 2, such as at least 3, such as at least 4, such as at least 5, such as at least 6, such as at least 7, such as at least 8, such as at least 9, such as at least 10 times the cross sectional area of the unit cell.



In that situation, the light may propagate in and/or around air, which provides a number of advantages both as to transmission loss, dispersion, and when used e.g. as a sensor where gas or liquid may be provided within the void to obtain optimum overlap between the light and the gas or liquid.

5

In a number of different applications, the additional element or any material adjacent thereto may desirably comprise a dopant or a material showing higher order optical effects.

For communication purposes, higher order effects may be used for e.g. soliton

10 communication.

For applications for fibre lasers or fibre amplifiers, the dopant may be e.g. a rare earth dopant adapted to receive pump radiation and amplify radiation travelling in the core region.

15

Alternatively, the dopant may be a light sensitive dopant, such as Germanium or Deuterium. In that situation, the dopant may be used for e.g. optically writing a grating in the fibre or core region.

20 For sensor applications, the dopant may be a material responsive to a characteristic of a gas or liquid, which response may be detected optically by light travelling in the core region.

In a number of applications, it is preferred that the core region comprises a second  
25 additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other additional element.

In one application, one elongated element may be a void holding a liquid or gas which may  
30 be too turbid for light to travel through. In that situation, the light may travel in the other element while still coupling with the liquid or gas due to the distance between the elements.

In this situation, one may choose to have the liquid or gas travel only in one or both additional elements - or even in all elongated voids, such as voids of the cladding structure.

35



Also, by providing two elements between which the light may couple, a number of optical devices may be provided, such as optical fibre couplers. The optical coupling between core elements or core regions may be designed so as to have a predetermined coupling at one or more defined wavelengths, which further makes a number of optical elements possible.

5

As indicated above, specific advantages will be obtained also when the second additional element is a void.

In fact, due to the periodic structure of the present fibre, the fibre may easily be made to  
10 comprise a plurality of core regions.

These core regions may be provided sufficiently close for light travelling in one core region being able to couple to one or more core regions.

15 Alternatively, the core regions may be positioned spaced apart in order to provide a number of separate waveguides in a single fibre. In fact, the waveguides may be spaced sufficiently apart to the band gap structures surrounding each thereof to be different and e.g. be optimised for different wavelengths or wavelength regimes.

20 Preferably, the core regions are positioned symmetrically within the periodic structure, a period of the core regions being larger than a period of the periodic structure.

Naturally, a fibre of the present type may be used for a number of applications where fibres are already used today.

25

Thus, in a ninth aspect, the invention relates to a sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

- a length of the optical fibre according to the invention, wherein the core region  
30 comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
- means for providing the liquid or gas into the void of the core region,
- means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be  
35 determined,



- means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

At present, the characteristic may be absorption, absorbance, the presence of a specific  
5 agent or material in the gas or liquid, such as for use as a smoke detector, or any other characteristic sensed by an optical sensing method.

If the gas or liquid has a sufficiently low absorption at the wavelength of the light, the  
introducing means may be adapted to introduce the light into the first additional element. In  
10 that situation, an optimum overlap exists between the light and the liquid or gas.

Alternatively, the core region may comprise a second, elongated element extending in the  
longitudinal direction of the fibre, where the first and second additional elements are  
positioned at a distance where light travelling in one additional element is able to couple to  
15 the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element. In that situation, the sensing takes place via the light extending from the second to the first element.

In another type of sensor, the characteristic may not be sensed directly by light. In that  
20 situation, it may be desired to expose a suitable material to the characteristic, where the response of that material may be sensed optically. Thus, in this situation, at least part of an inner surface of the first additional element may comprise a layer of a material being adapted to alter in response to the characteristic of the gas or liquid, and wherein the  
introducing means is adapted to introduce light of a wavelength responsive to the altering  
25 of the material.

Naturally, the sensor may additionally comprise means for providing the gas or liquid in the  
fibre, such as for repeatedly providing gas or liquid therein, such as a gas pump if the  
sensor is used as a smoke detector.

30

In a tenth aspect, the invention relates to a fibre amplifier for amplifying an optical  
signal, said fibre amplifier comprising:

- a length of optical fibre according to the invention, wherein the core region  
35 comprises a dopant material along at least part of the length, and



- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

- 5 Normally, fibre amplifiers will, further comprise means for spectrally separating the amplified optical signal from the pump signal, in order not to have pump radiation travelling in the fibre outside the amplifying region.

Especially for communication purposes, the dopant would comprise rare earth

- 10 ions, such as erbium

For other purposes, such as if it is desired to optically write gratings or other structures in the fibre or core region, or simply for increasing the refractive index of the core region, the dopant may comprise a photosensitive material, such as

- 15 germanium and/or deuterium.

In an eleventh aspect, the invention relates to a fibre laser for outputting laser radiation, said fibre laser comprising:

- 20 - a length of optical fibre according to any of the preceding claims, wherein the core region comprises a dopant material along at least part of the length,

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and

25

- feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

- 30 Especially for communication purposes, the dopant comprises rare earth ions, such as erbium.



Also, the dopant may comprise a photosensitive material, such as germanium or deuterium, in order to facilitate e.g. the writing of gratings in the fibre or core region - or for increasing the refractive index of the core region.

## 5 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a Honeycomb cladding structure with a two-dimensional periodicity

FIG. 2 shows a band diagram for a basic Honeycomb photonic crystal with a hole filling fraction of 30%.  $k\Lambda$  is the normalised frequency, where  $k$  is the free-space wave number ( $=2\pi/\lambda$ ).  $\Lambda$  is the distance between two neighbouring primary elements. The three high symmetry points of the Honeycomb crystal are indicated by O, M, and X.

FIG. 3 shows a two-dimensional modified Honeycomb-based photonic crystal. Two differently doped silica glasses are used as well as undoped fused silica. The silica type 1 represents a capillary tube, and type 2 a solid cane from which the Honeycomb silica-air photonic crystal may partly be fabricated. The unit cell of the structure is marked by the solid-line rhomb.

20

FIG. 4 shows the relative band gap size as a function of the normalised wave constant for the basic Honeycomb lattice (hole filling fraction=30%), and three modified versions of the Honeycomb lattice.

FIG. 5 shows a schematic illustration of the concept of nodes (high-index areas) and veins (holes/voids), and an illustration of the superior properties of the Honeycomb structure over the triangular structure as well as the influence of interstitial holes in triangular structures a), and Honeycomb structures b).

FIG. 6 shows a fibre design based on a Honeycomb structure. A single hole creates a defect in the periodicity (which thereby forms the core region of the fibre).

FIG. 7 shows an illustration of the two first band gaps (primary and secondary gaps) of a Honeycomb PCF with a cladding hole filling fraction of 10% and a defect hole



with same size as the cladding holes. Within the primary band gap the extra air hole in the core of the fibre causes a single degenerate mode to appear. This 'defect' mode is localised around the core of the fibre, and does not couple to the cladding structure (as it is here forbidden due to the PBG effect)

5

FIG. 7 further illustrates the field distribution of the core mode. For a fibre with  $\Lambda=2.0\mu\text{m}$  the core mode falls within the primary band gap in a wavelength range which corresponds approximately to 1.0 to 3.0  $\mu\text{m}$ . Leakage-free, single mode wave guidance is thus obtained over this wavelength range. The dotted line

10 relates to the effective index of the cladding structure.

FIG. 8 shows a PBG guided mode for a Honeycomb PCF with hole filling fraction = 10%. The figure shows the electric field squared for the 'defect' mode illustrated in FIG.7. Light areas indicate high field intensity. The real space structure has been  
15 superimposed to illustrate the localisation of the 'defect' mode to the extra air hole in the core of the fibre.

FIG. 9 shows the effect of tuning the frequency of the core-mode precisely within the PBG by varying the size of the central hole. The plot is for a fixed value of  $\beta\Lambda=5$ . The hole filling  
20 factor of the cladding is 18%. The size of the single, central defect hole is varied.

FIG. 10 shows a basic triangular lattice formed by primary elements. The unit cell of the triangular lattice is also depicted.

25 FIG. 11 shows a basic triangular lattice and a corresponding unit cell. The triangular structure is defined by primary elements. Furthermore, further elongated elements and secondary elements are shown. A first circle is defined as being the largest possible circle having a centre positioned not outside the unit cell and not comprising any part of any primary elements. A second circle is defined as being the largest possible circle having a  
30 centre not positioned outside the unit cell and not comprising any part of any primary elements and any part of any further elongated elements.

FIG. 12 shows a Honeycomb lattice formed by primary elements. The unit cell of the Honeycomb lattice is also depicted.

35



FIG. 13 shows a basic Honeycomb lattice and a corresponding unit cell. The Honeycomb structure is defined by primary elements. Furthermore, further elongated elements and secondary elements are shown. A first circle is defined as being the largest possible circle having a centre positioned not outside the unit cell and not comprising any part of any primary elements. A second circle is defined as being the largest possible circle having a centre not positioned outside the unit cell and not comprising any part of any primary elements and any part of any further elongated elements. The distance between two neighbouring primary elements is denoted  $\Lambda_1$ . The distance between the centres of two first circles is denoted  $\Lambda_2$ .

FIG. 14 shows a Kagomé lattice formed by primary elements. The unit cell of the Kagomé lattice is also depicted.

FIG. 15 shows a basic Kagomé lattice and a corresponding unit cell. The Kagomé structure is defined by primary elements. Furthermore, further elongated elements and secondary elements are shown. A first circle is defined as being the largest possible circle having a centre positioned not outside the unit cell and not comprising any part of any primary elements. A second circle is defined as being the largest possible circle having a centre not positioned outside the unit cell and not comprising any part of any primary elements and any part of any further elongated elements. The distance between two neighbouring primary elements is denoted  $\Lambda_1$ . The distance between the centres of two first circles is denoted  $\Lambda_2$ .

FIG. 16 schematically shows a further embodiment of a cladding cross section in which a Honeycomb structure is formed by adding additional (equal sized) holes between the original ones defining the vertices of the fundamental hexagonal structure.

FIG. 17 illustrates a further embodiment of a cladding cross section in which a Honeycomb structure is formed by adding additional (smaller sized) holes between the original ones defining the vertices of the fundamental hexagonal structure.

FIG. 18 illustrates a further embodiment of a cladding cross section in which a Kagomé structure is formed from a Honeycomb structure by adding additional (larger sized) holes between the original ones defining the vertices of the fundamental hexagonal structure.



FIG. 19 schematically shows a further embodiment of a cladding cross section in which a Honeycomb structure is formed by adding a group of two additional (smaller) holes between the original ones defining the vertices of the fundamental hexagonal structure.

5 FIG. 20 schematically shows a further embodiment of a cladding cross section in which a Honeycomb structure is formed by adding a group of two additional (smaller) holes between the original ones defining the vertices of the fundamental hexagonal structure, but in contrast to FIG. 19 the group of two smaller voids is turned 90 degrees.

10 FIG. 21 illustrates a combination of the Honeycomb and Kagomé structure in which the Honeycomb defining elements have been replaced by a group of three elements in a equal sided triangular structure.

FIG. 22 illustrates an embodiment of a periodic cladding in which the voids/rods are placed  
15 in a square lattice structure.

FIG. 23 illustrates a square-lattice cladding structure, which has been extended by adding additional voids/rods centred on straight lines between the square corner points.

20 FIG. 24 illustrates an embodiment of a periodic cladding in which the voids/rods are placed in a rectangular lattice structure having two unit cells.

FIG. 25 shows an embodiment of a periodic cladding in which the voids/rods are placed in an octagonal structure. A unit cell is also depicted.

25 FIG. 26 illustrates an embodiment of a periodic cladding in which triangular and hexagonal elements (sub-groups) have been combined.

FIG. 27 illustrates an embodiment of a periodic cladding in which a square lattice structure  
30 and hexagonal elements (sub-groups) have been combined.

FIG. 28 schematic illustration of a fibre/waveguide core area and the closest Honeycomb cladding surroundings. The core region is formed by a single Honeycomb cell with larger hole sizes.

35



FIG. 29 schematic illustration of a fibre/waveguide core area and the closest Honeycomb cladding surroundings. The core region is formed by a single Honeycomb cell with smaller hole size.

- 5 FIG. 30 schematic illustration of a fibre/waveguide core area and the closest Honeycomb cladding surroundings. The core region is formed by a single void with larger hole size.

FIG. 31 schematic illustration of a fibre/waveguide core area and the closest Honeycomb cladding surroundings. The core region is formed by two voids with larger hole sizes.

10

FIG. 32 schematic illustration of a fibre/waveguide core area and the closest Kagomé cladding surroundings. The core region is formed by a single void with larger hole size.

- FIG. 33 schematic illustration of a fibre/waveguide core area and the closest Kagomé  
15 cladding surroundings. The core region is formed by two voids with larger hole sizes.

FIG. 34 schematic illustration of a fibre/waveguide core area and the closest Kagomé cladding surroundings. The core region is formed by a single hexagonal cell with larger hole size.

20

FIG. 35 schematic illustration of a fibre/waveguide core area and the closest Kagomé cladding surroundings. The core region is formed by a single hexagonal cell with smaller hole size.

- 25 FIG. 36 shows an asymmetric position of a defect void surrounded by periodic Honeycomb cells.

FIG. 37 shows an asymmetric position of a defect void surrounded by periodic Kagomé cells

30

FIG. 38 shows an example, where the defect is formed by two voids with smaller diameters than the voids defining the vertices of the Honeycomb cladding cells.

- FIG. 39 shows an example, where the defect is formed by two voids having the same  
35 diameter as the voids defining the vertices of the Honeycomb cladding cells.



FIG. 40 shows an example, where the defect is formed by two voids with larger diameters than the voids defining the vertices of the Honeycomb cladding cells.

- 5 FIG. 41 shows two voids in the core cell, one void with dimensions as the voids defining the vertices of the Honeycomb cladding cell and the other void having larger dimensions.

FIG. 42 shows two voids in the core cell, one void with dimensions smaller than the voids defining the vertices of the Honeycomb cladding cell and the other void having larger  
10 dimensions.

FIG. 43 shows two voids in the core cell, one void with dimensions as the voids defining the vertices of the Honeycomb cladding cell and the other void having smaller dimensions.

- 15 FIG. 44 shows two voids in the core cell, both voids having dimensions as the voids defining the vertices of the Kagomé cladding cell.

FIG. 45 shows two voids in the core cell, one void with dimensions as the voids defining the vertices of the Kagomé cladding cell and the other void having smaller dimensions.  
20

FIG. 46 shows two voids in the core cell, one void with dimensions smaller than the voids defining the vertices of the Kagomé cladding cell and the other void having larger dimensions.

- 25 FIG. 47 shows two voids in the core cell, one void with dimensions as the voids defining the vertices of the Kagomé cladding cell and the other void having larger dimensions.

FIG. 48 shows two voids in the core cell, both voids having dimensions larger than the voids defining the vertices of the Kagomé cladding cell.

- 30 FIG. 49 shows two voids in the core cell, both voids having dimensions smaller than the voids defining the vertices of the Kagomé cladding cell.



FIG. 50 shows two low-index defects which has been introduced in neighbouring cells to form a region in which guided mode(s) may propagate. In FIG. 50, the defect voids have the same dimensions as the voids used to form the Honeycomb cladding structure.

- 5 FIG. 51 shows defect voids/holes having smaller cross-section areas than the voids defining the vertices of the Honeycomb cladding structure.

FIG. 52 shows defect voids/holes having larger cross-section areas than the voids defining the vertices of the Honeycomb cladding structure.

10

FIG. 53 shows two defect voids/holes, one void having a larger cross-section area than the voids defining the vertices of the Honeycomb cladding structure, the other void having a cross-section area as the voids defining the vertices of the cladding structure.

- 15 FIG. 54 shows two defect voids/holes, one void having a larger cross-section area than the voids defining the vertices of the Honeycomb cladding structure, the other void having a smaller cross-section area than the voids defining the vertices of the cladding structure.

- FIG. 55 shows two defect voids/holes, one void having a smaller cross-section area than  
20 the voids defining the vertices of the Honeycomb cladding structure, the other void having a cross-section area as the voids defining the vertices of the cladding structure.

- FIG. 56 shows two low-index defects which has been introduced in neighbouring cells to form a region in which guided mode(s) may propagate. The defect voids have the same  
25 dimensions as the voids used to form the Kagomé cladding structure.

FIG. 57 shows defect voids/holes having smaller cross-section areas than the voids defining the vertices of the Kagomé cladding structure.

- 30 FIG. 58 shows defect voids/holes having larger cross-section areas than the voids defining the vertices of the Kagomé cladding structure.

- FIG. 59 shows two defect voids/holes, one void having a larger cross-section area than the voids defining the vertices of the Kagomé cladding structure, the other void having a cross-  
35 section area as the voids defining the vertices of the cladding structure.



FIG. 60 shows two defect voids/holes, one void having a larger cross-section area than the voids defining the vertices of the Kagomé cladding structure, the other void having a smaller cross-section area than the voids defining the vertices of the cladding structure.

5

FIG. 61 shows two defect voids/holes, one void having a smaller cross-section area than the voids defining the vertices of the Kagomé cladding structure, the other void having a cross-section area as the voids defining the vertices of the cladding structure.

- 10 FIG. 62 shows a cell without a defect placed between two cells containing defect voids. The defect defining the vertices of voids have smaller cross-sectional areas than the voids defining the vertices of the simple Honeycomb cladding structure.

FIG. 63 shows a cell without a defect placed between two cells containing defect voids.

- 15 The defect forming voids have cross-sectional areas as the voids defining the vertices of the simple Honeycomb cladding structure.

FIG. 64 shows a cell without a defect placed between two cells containing defect voids.

One of the defect forming voids has a cross-sectional area as the voids defining the

- 20 vertices of the simple Honeycomb cladding structure, the other defect forming void has a cross-sectional area smaller than the cladding structure.

FIG. 65 shows a cell without a defect placed between two cells containing defect voids.

One of the defect forming voids has a cross-sectional area smaller than the voids defining

- 25 the vertices of the simple Honeycomb cladding structure, the other defect forming void has a cross-sectional area larger than the cladding structure.

FIG. 66 shows a cell without a defect placed between two cells containing defect voids.

One of the defect forming voids has a cross-sectional area as the voids defining the

- 30 vertices of the simple Honeycomb cladding structure, the other defect forming void has a cross-sectional area larger than the cladding structure.

FIG. 67 shows a cell without a defect placed between two cells containing defect voids.

The defect forming voids have larger cross-sectional areas than the voids defining the

- 35 vertices of the simple Honeycomb cladding structure.



FIG. 68 shows a cell without a defect placed between two cells containing defect voids. The defect forming voids have smaller cross-sectional areas than the voids defining the vertices of the simple Kagomé cladding structure.

5

FIG. 69 shows a cell without a defect placed between two cells containing defect voids. The defect forming voids have cross-sectional areas as the voids defining the vertices of the simple Kagomé cladding structure.

10 FIG. 70 shows a cell without a defect placed between two cells containing defect voids.

One of the defect forming voids has a cross-sectional area as the voids defining the vertices of the simple Kagomé cladding structure, the other defect forming void has a cross-sectional area smaller than the cladding structure.

15 FIG. 71 shows a cell without a defect placed between two cells containing defect voids.

One of the defect forming voids has a cross-sectional area smaller than the voids defining the vertices of the simple Kagomé cladding structure, the other defect forming void has a cross-sectional area larger than the cladding structure.

20 FIG. 72 shows a cell without a defect placed between two cells containing defect voids.

One of the defect forming voids has a cross-sectional area as the voids defining the vertices of the simple Kagomé cladding structure, the other defect forming void has a cross-sectional area larger than the cladding structure.

25 FIG. 73 shows a cell without a defect placed between two cells containing defect voids.

The defect forming voids have larger cross-sectional areas than the voids defining the vertices of the simple Kagomé cladding structure.

FIG. 74 shows a simple Honeycomb cladding structure with circular voids in the cladding

30 cells for a case where the core (defect) site is formed by a void with elliptical cross section.

The cross-sectional area of the elliptical core is larger than the cross-sectional area of the voids defining the vertices of the cladding structure.



FIG. 75 shows a void/hole with elliptical cross section placed in a simple Honeycomb cladding structure. The cross-sectional area of the elliptical core is smaller than the cross-sectional area of the voids defining the vertices of the cladding structure.

5 FIG. 76 illustrates an example in which an elliptical core void is placed centrally in a Kagomé cladding structure formed by circular voids. The cross-sectional area of the elliptical core is smaller than the cross-sectional area of the voids defining the vertices of the cladding structure.

10 FIG. 77 shows a core region having an elliptical cross-sectional area, which is larger than the cross-sectional area of the Kagomé cladding forming voids.

FIG. 78 shows a core defect of arbitrary cross section in a Honeycomb cladding structure.

15 FIG. 79 shows a core defect of arbitrary cross-section in a Kagomé cladding structure.

FIG. 80 shows a circular core forming defect void placed centrally in a simple Honeycomb cladding structure realised by near-triangular shaped voids.

20 FIG. 81 shows a circular core forming defect void placed centrally in a simple Honeycomb cladding structure realised by "windmill" shaped voids.

FIG. 82 shows a fibre amplifier for amplifying an optical signal using a length of the optical fibre according to the invention.

25

FIG. 83 shows a fibre laser for outputting an optical signal using a length of the optical fibre according to the invention.

## THEORY

30

In 1990 the first efficient method for calculating PBG's of photonic crystals was described. This method basically assumes the crystal to extend indefinitely in space. Then any solution is extended, and can be described as a sum of plane waves, due to the crystal periodicity.

35



A two dimensional photonic crystal is a dielectric structure which is periodic in two dimensions, and invariant in the third dimension.

The lattice defining the periodicity of the structure is defined by its lattice vectors

- 5  $\bar{R} = n_1 \bar{R}_1 + n_2 \bar{R}_2$ , where  $n_1$  and  $n_2$  are integers. Then extended field solutions inside the crystal may be described as a plane wave multiplied by a Bloch function with the same discrete translational symmetry as the lattice structure. Therefore, any extended field solution (exemplified by the magnetic field) can be written as the infinite sum:

$$10 \quad \bar{H}(\bar{k}, \bar{r}) = e^{i\bar{k} \cdot \bar{r}} \sum_{\bar{G}} \sum_{j=1} h_j(\bar{k}, \bar{G}) \bar{e}_j(\bar{k} + \bar{G}) e^{i\bar{G} \cdot \bar{r}} \quad (1)$$

Here  $\bar{G}$  defines the reciprocal lattice,  $\bar{G} \cdot \bar{R} = 2\pi N$ , where  $N$  is an integer. The vector  $(\bar{k} + \bar{G})$  and the unit vectors  $\bar{e}_1(\bar{k} + \bar{G})$  and  $\bar{e}_2(\bar{k} + \bar{G})$  define a triad.  $\bar{k}$  is the wave vector of the plane wave.

15

The actual field (and eigen frequencies), is found by expressing Maxwell's equations in the form of a Hermitian operator equation:

$$\nabla \times \left[ \frac{1}{\epsilon(\bar{r})} \nabla \times \bar{H}(\bar{r}) \right] = \left( \frac{\omega}{c} \right)^2 \bar{H}(\bar{r}) \quad (2)$$

20

To solve this equation, it is needed to Fourier-transform the inverse dielectric function  $1/\epsilon(\bar{r})$  as well:

$$\frac{1}{\epsilon(\bar{r})} = \sum_{\bar{G}} \epsilon_{\bar{G}}^{-1} e^{i\bar{G} \cdot \bar{r}}, \quad (3)$$

$$\epsilon_{\bar{G}}^{-1} = \frac{1}{a_c} \int d^2 \bar{r} e^{-i\bar{G} \cdot \bar{r}} \frac{1}{\epsilon(\bar{r})}.$$

25

Here the integral is taken over a primitive unit cell having an area  $a_c$ , and the sum is in principle over all possible  $\bar{G}$ -vectors. One finds the dielectric constants, by either using an FFT, or by finding analytical expressions for the Fourier coefficients. Here the latter technique has been used.



For a given choice of the reciprocal lattice vector  $\vec{G}$  the following dependency from (1) and (2) is found:

$$5 \quad \sum_{\vec{G}'} \begin{pmatrix} \vec{e}_2 \cdot \vec{e}_2' & -\vec{e}_2 \cdot \vec{e}_1' \\ \vec{e}_1 \cdot \vec{e}_2' & \vec{e}_1 \cdot \vec{e}_1' \end{pmatrix} \cdot \begin{pmatrix} h_1' \\ h_2' \end{pmatrix} \varepsilon_{\vec{G}}^{-1} \vec{G} \cdot \vec{L} = \left(\frac{\omega}{c}\right)^2 \begin{pmatrix} h_1 \\ h_2 \end{pmatrix} \quad (4)$$

where  $\vec{L} = \left[ \vec{k} + \vec{G} \right] \left[ \vec{k} + \vec{G}' \right]$ . Inside the matrices, the operand is the vector  $(\vec{k} + \vec{G}')$  if a prime ' is given, and the vector  $(\vec{k} + \vec{G})$  if no prime is given. N such equations are rewritten (one for each of the N shortest  $\vec{G}$ -vectors), truncating the sum to the same N  $\vec{G}'$ -vectors,  $\vec{G}_i = \vec{G}_i'$ ,  
10 to a simple Hermitian eigen value matrix equation using a basis of N plane waves.

The first Brillouin zone is the set of points in the reciprocal lattice plane, which are closer to the lattice grid point  $\vec{G} = \vec{0}$ , than to any other reciprocal lattice grid points. The first Brillouin zone can be constructed from the irreducible Brillouin zone through the use of mirroring  
15 and rotational symmetry. For finding the possible PBG's of a photonic crystal, one solves the eigen value-problem for all the different values  $\vec{k}_\pi$  ( $\vec{k}_\pi$  is  $\vec{k}$  projected on the plane defined by the reciprocal lattice vectors) along the boundary of the irreducible Brillouin zone. Any frequency intervals, where no solutions are found define the PBG's of the photonic crystal.

20

For propagation restricted to the plane defined by the lattice vectors  $\vec{R}$  (that is  $\vec{k} = \vec{k}_\pi$ ) the two different plane wave directions in (4) de-couple into TM solutions ( $j=1$  corresponding to the  $\vec{e}_2 \cdot \vec{e}_2'$ ) and TE solutions ( $j=2$  corresponding to the term  $\vec{e}_1 \cdot \vec{e}_1'$ ). The TM solutions are defined as solutions having the electric field along the invariant direction, while TE  
25 solutions have the electric field in the plane defined by the lattice vectors. For  $\vec{k} \neq \vec{k}_\pi$  the equations no longer de-couple, and the complete set of equations in (4) must be solved.

In order to calculate the electromagnetic properties of a spatial defect within an otherwise periodic structure - such as the properties of the core region of the PCF's -  
30 the outlined plane wave method may still be applied, where the smallest region describing the periodic structure is enlarged to include the defect (a so-called super-cell approximation). In this way a super-periodicity is introduced where also



the defect is repeated periodically. Using a super-cell approximation the properties of the defect region may be accurately determined if the size of the super-cell is large enough to ensure that neighbouring defects are uncoupled. The numerical results presented in this patent have been calculated using the principles outlined  
5 in this section.

The most basic requirement for waveguides to operate by PBG effects is that a periodic cladding structure exists and that this cladding structure is able to exhibit PBG effect. Within the invention is an example of a cladding structure with a two-  
10 dimensional periodicity - namely the Honeycomb structure illustrated in Fig.1.

Focusing first on the cladding structure alone, Fig. 2 illustrates the complete, out-of-plane two-dimensional PBG's which are exhibited for a basic Honeycomb structure with an air filling fraction of 30%, where the propagation constant,  $\beta$ , (which is  
15 defined as that component of the wave vector which is parallel to the centre axis of the holes) is fixed at  $\delta/\Lambda$  (where  $\Lambda$  is the centre distance between holes). The refractive index of the background material is set to be equal to 1.45. From Fig. 1 it is seen the appearance of two PBG's:

- 20 a) a primary gap between bands 2 and 3, and
- b) a secondary gap between bands 6 and 7.

The formation of these PBG's is the most fundamental requirement for PBG based components. In order to increase the two band gaps, the impact on the size of the  
25 band gaps from modification implied to the Honeycomb-based structure is illustrated. The important case of introducing several differently doped silica glasses in the structure is studied. For silica glasses a representative index range which may be achieved with today's doping technologies goes from to 3% and down to 1% of the nominal undoped value of silica which is approximately 1.45 at 1.55  $\mu\text{m}$ . A  
30 schematic of the modified structure is shown in Fig. 3, where the rhomboidal solid line represents one choice of unit cell (a unit cell is defined as the smallest possible area which only through translation may be used to fully represent the periodic structure). The structure has a background material which comprises further small hole elements - which relates to those interstitial holes which have been observed



in experimentally realised triangular photonic crystal cladding structures - and up to three different dopant levels of silica. The interstitial holes are easily introduced in a photonic crystal realised by the stack- and pull fabrication techniques currently used for PCF's.

5

In Fig. 4 the relative size of the primary gap is illustrated for the basic Honeycomb structure with an air filling fraction of 30%. The relative band gap size is defined as the difference between the upper and lower frequencies of the band gap divided by its centre frequency. Although no PBG's exists for the in-plane case of silica-air structures ( $\beta=0$ ), complete PBG's are found to open up when moving out of the plane. In the figure is also included three cases of modified Honeycomb structures:

10

- a) interstitial holes introduced ( $f_{\text{air}}=8\%$ )
- b) interstitial holes and three differently doped silica glasses ( $n_1=1.44$ ,  $n_2=1.45$ ,  
15  $n_3=1.47$ )
- c) three differently-doped silica glasses ( $n_1=1.47$ ,  $n_2=1.45$ ,  $n_3=1.44$ ).

The indices refer to the three silica types indicated in Fig. 3, and for the structures comprising three silica dopants the outer diameter of the tube and cane (silica type 1

20

and 3, respectively) have been set equal to  $\Lambda$ . For the basic structure (undoped silica and air) a maximum PBG size of 5.3% at  $\beta=6.5/\Lambda$  is observed. This size may be increased to 6.4% by adding interstitial holes to the structure, and further increased to 7.1% by lowering the refractive index of the silica surrounding the air holes (silica type 1) while increasing the index of the silica forming the canes (silica type 3).

25

The Honeycomb photonic crystal is a structure with high-index regions - denoted nodes (i.e. the region with silica type 3 in Fig. 3) which are isolated by voids/holes. The region bridging two nodes is denoted a vein in Fig. 5.

30

It has been found that the largest band gaps are achieved for structures having most isolated nodes (high-index regions), and having nodes with the highest possible refractive index. Veins (bridges) may be narrowed further in the



Honeycomb-based structures through the interstitial holes, whereas the interstitial holes fall right in the centre of the node in the triangular structure. Thus, it is evident that interstitial holes may be either advantageous or disadvantageous, depending on their location.

5

To further support that the nodes should have the highest possible index, it is observed how the size of the primary band gap is, indeed, decreased for the structure (c) modified by lowering the index of the nodes, while increasing the index of the silica surrounding the air holes.

10

Although not illustrated the same conclusions is found to be valid for the size of the secondary band gap. This result demonstrates the advantages of introducing differently doped silica glasses in the Honeycomb-based photonic crystal, and isolating the high-index regions by surrounding them with materials with lower

15 refractive index.

According to the invention, cladding structures having holes/rods placed in a so-called Kagomé structure are also advantageous. Both Kagomé and Honeycomb structures have intrinsically larger nodes and relatively narrower veins than the triangular structure. Furthermore, for the triangular structure, it should be noted how the interstitial holes which have been observed in photonic crystal fibres with a triangular hole arrangement in the cladding, fall right in the centre of the nodes (thereby severely damaging their ability to act as high index centres, and the cladding structure to exhibit PBG effect). Thus, it is an advantage of the Kagomé and Honeycomb structure that the interstitial holes leave the nodes undisturbed, and at the same time narrow the veins even further.

By locally breaking the periodicity of a photonic crystal, a spatial region with optical properties different from the surrounding bulk photonic crystal can be created. If such a defect region supports modes with frequencies falling inside the forbidden gap of the

surrounding full-periodic crystal, these modes will be strongly confined to the defect. This is the principle on which the operation of the PBG guiding fibres relies, namely a complete out-of-plane 2D band gap exhibited by the photonic crystal cladding, and a correctly designed defect, forming a spatial region to which very



strong transverse confinement can be achieved. For this defect region to exhibit optical properties different from the surrounding periodic structure (i.e., be able to support a localised mode) it is important to notice that it is not a requirement that the defect region has a higher index than its surroundings.

5

For a non-periodic dielectric surrounding media this would be the only case under which localisation can occur (which is of course the case of total internal reflection utilised in all conventional optical waveguides). Leakage-free guidance of light confined to a region with a lower index than its surroundings would, therefore, not  
10 be expected to be possible from index guidance waveguide theory, but if the surrounding material exhibits PBG effects even a low-index defect region may be able to localise the light, and thereby act as a (new) highly unusual waveguide.

For a fibre design (see Fig. 6) based on a Honeycomb structure and a single hole  
15 creating a defect in the periodicity (which thereby forms the core region of the fibre) the primary and secondary band gaps of the cladding are depicted in Fig. 7. The fibre has a cladding air filling fraction of 10% and the defect 'core' hole has the same size as the cladding holes. Inside the primary gap, a single defect-mode traversing the gap from approximately  $\beta/\Lambda=5$  to 17 is observed. This mode is caused  
20 solely by the introduction of the defect air hole in the Honeycomb structure.

For the full periodic structure, exactly the same PBG's (with no modes inside) with identical boundaries to those of the crystal including the defect is found. This defect-mode is strongly localised to the region comprising the extra air hole (albeit  
25 this is a low-index region). Fig. 8 illustrates the calculated squared amplitude of the E-field. The mode was calculated for a  $\beta/\Lambda$ -value of 8.0. For this value, the defect-mode is approximately in the middle of the band gap, and the expected strong localisation of the mode is apparent. This mode does not couple to cladding modes in the PCF, (since the mode is falling inside the band gap of the photonic  
30 crystal cladding) and loss-less guidance may therefore, in principle, be achieved over long lengths.

Although almost the entire field of the defect mode for this particular PCF is distributed in the silica, full confinement of light in air is - in principle - possible for



PBG guiding fibres. Such fibres would, naturally, have a tremendous potential in both telecommunications and sensor areas. Also included in the Fig.7 is the radiation line (dotted line), defined as the lowest-frequency allowed mode in the full periodic structure - and relates to the effective index,  $n_{\text{eff}}$  of the cladding

5 structure as  $1/n_{\text{eff}}$ . Below this line is a semi-infinite 'band gap', where no modes exist. This is the region in which all TIR-based fibres (including triangular high-index core PCF's) operate, since a high-index defect causes at least one mode to appear below this line. Such index-guided modes are seen not to be a feature of the low-index core Honeycomb-based PCF's.

10

Improved cladding structures, as e.g. modified Honeycomb or Kagomé structures, means that larger band gaps may be achieved. Larger band gaps results in stronger confinement of the defect mode, and will, therefore, not only be of importance for wider 'tuning'-ranges of the fibres, but also for very robust operation

15 of these with respect to low propagation and bending losses.

A further advantageous is the high flexibility of the PBG guiding fibres. By the PBG effect it is, as demonstrated, possible to open up forbidden frequencies regions by designing the micro-structured cladding correctly, and by introducing a defect site

20 (having one or more holes/rods) to localise light within this region. By independently optimising the cladding and the defect structures, it is thus possible to tailor the properties of the fibres.

In Fig.9 is illustrated how it is possible - for a fibre with a design as in Fig.6 - that by

25 varying the size of the central defect hole, but keeping the cladding structure fixed, to precisely tune the frequency of the defect mode within the PBG region of the cladding. Although this is only been illustrated for a defect site introduced by a single additional hole, many other ways of creating such defects may be thought of. E.g. for polarisation managing purposes the introduction of asymmetric defects

30 (possibly with a very large defect region) seem as a correct design route.

## DETAILED DESCRIPTION OF THE INVENTION

Many different realisations of periodic cladding structures exist for low-index-core PBG

35 waveguides, because they can consist of a void, hole, or any suitable (additional or



missing) material(s) disposed periodically in a (first material) matrix. By low-index-core PBG waveguide is meant any structure capable of the guiding electromagnetic fields according to the present invention, such as optical fibres, optical fibre amplifiers, fibre lasers and optical fibre based sensors. Another group of PBG waveguides comprises

5 planar waveguide structures, such as sensors, splitters, couplers, multiplexers, amplifiers and lasers.

An example of such a periodic micro-structured cladding shown in FIG. 16, where additional voids (20) have been centred on a straight line between the original voids (21)

10 forming the 2-dimensional hexagonal (Honeycomb) structure. The function of the additional voids is to modify the penetration of the electromagnetic field between the different unit cells (low-refractive index cladding areas can locally limit the cladding field intensity) and hereby add additional means of adjusting the waveguiding properties of the fibre/waveguide. It is also noteworthy that the structure illustrated in FIG. 16 may be seen

15 as a superposition of the Honeycomb structure (formed by the voids (21)) and the Kagomé structure (formed by the voids (20)).

Further possibilities of adjusting the photonic-band gap-forming properties of the periodic hexagonal cladding structures are exemplified by the illustrations in FIG. 17 and FIG. 18, in

20 which the mutual cross-section areas of the cladding forming void are modified. In the example of FIG. 17, the additional holes/voids (22) are formed by a smaller cross-section area than the ones (21) that are not placed on a straight line between neighbouring voids.

In FIG. 18, the additional holes (23) on the contrary have a larger cross section area,

25 whereby the field penetration properties between unit cells are controlled in a new way. It should also be noted, that the examples of hexagonal cladding structures presented here not necessarily have to be formed by circular voids, but any periodically repeated cross-sectional shape may be used to for the PBG's of the cladding (e.g., holes/voids of triangular, square, elliptical or any other shape may be applied).

30 In addition, it should be pointed out that minor variations from the ideal structures described here may introduced during fabrication, but as long as the fundamental physical limits of the fibres are preserved, the structures are covered by the present invention.



Another possibility of engineering the PBG properties of the cladding structures, and thereby create new waveguiding properties of the optical waveguides/fibres, is to replace single voids by groups of voids. An example of such a design is illustrated in FIG. 19, which may be seen as a further development of the structure of FIG. 16, in which the additional  
 5 hole/void (20) placed on a straight line between two neighbouring holes has been replaced by a group (24) of two voids with smaller cross-section area.

A different orientation of the group of additional voids (25) is illustrated in the example of FIG. 20, resulting in a configuration, where four voids are placed on a straight line.  
 10 Naturally more complex groups of voids may be placed in the overall structure, and direct extensions of the outlined approach are the use of groups with more than two additional voids, and the shaping of these with cross-sections different from the circular one.

A different example of the combined Kagomé and Honeycomb structures is shown in FIG. 21 in which the voids (20) placed in the Kagomé structure is maintained compared to FIG. 16, wherein each the of voids in the superimposed Honeycomb structure is replaced by a  
 15 group of three smaller voids (26) forming an equal sided triangular shaped figure. The specific orientation of the three-element group shown in FIG. 21 is not the only possibility, and numerous other orientations, relative magnitudes of the cross-sectional areas of the  
 20 voids/rods and the numbers of elements in each sub-group is covered by this invention.

The cladding structures, which have been drawn forward in the previous paragraph, have all been based on a fundamental hexagonal shape. However, also other possibilities exist for forming the periodic cladding structured low-index-core fibres, and one such example is  
 25 the square structure as illustrated in FIG. 22. In this realisation, the voids/rods (27) are centred at the corners of a square lattice structure.

In FIG. 23, the square structure has been extended by adding additional voids/rods (28) centred on straight lines between the square corner points. Note also that this structure  
 30 may be seen as a superposition of two square lattice structures, which has been angled 45 degrees relative to each other.

Yet another cladding structure realisation is the rectangular lattice shown in FIG. 24, which may be applied for applications, where two principal main axes (e.g., for polarisation  
 35 controlling components) are necessary. In agreement with the previous considerations on



hexagonal structures, in which different combinations of sub-groups of voids/rods are replacing the original elements in the lattice structure new and improved structures may be obtained by this technique.

- 5 An interesting example is shown in FIG. 25, where an octagonal structure is depicted. The structure may also be viewed as sub-groups of four equal sized voids/rods in a square structure placed in an overall square structure angled by 45 degrees relative to the sub-groups. As it has been mentioned previously, the orientations of the sub-groups may be varied in an infinite number of combinations, forming the basis of designing new
- 10 waveguiding structured with unique electromagnetic/optic properties that may be tailored to numerous advanced applications.

Examples of periodic cladding structures that combines hexagonal and triangular shaped lattice structures are shown in FIG. 26, and in FIG. 27 a combination of square and

- 15 hexagonal subgroups is illustrated. Other possibilities of applying different parallelograms in the cladding structures are also realistic for optical mode shaping.

All cladding structures previously disclosed, may be combined with various realisations of the core area. The core may be formed by a low refractive index area, which deliberately

20 breaks the symmetry of the cladding, and allows light to be guided along the core by the PBG effect. Thus, the waveguiding effect is fundamentally different from conventional high refractive index waveguiding.

- One example of the PCF with low-index core area covered by the present invention has
- 25 already been illustrated in FIG. 6, in which a low-index defect has been introduced as an additional void/hole centrally placed in one of the Honeycomb structure cells.

- Another example of a defect (or core) area that may serve as a low-index core area is illustrated in FIG. 28. In this structure, the larger diameter of the voids forming the core
- 30 area (31) ensures that the optical mode field is confined around the core and only to a limited extent penetrates into the cladding cells (32). The advantage of this realisation of the core area is that the mode field in this case will be concentrated in the centre of the core defect area, where glass or even materials with high non-linear coefficients may be placed for applications where strong non-linearities are relevant.



Yet another realisation of the formation of the core defect without adding a central void in one of the Honeycomb cells, is illustrated in FIG. 29, where the core forming voids (33) are of smaller diameter than the cladding cell voids (32). It should also be noted that other defects (or core areas) could be formed by interchanging the voids in the core region with voids of other dimensions, in such a way that the core cell is formed by voids of different diameters.

Such realisations are exemplified in FIG. 30, where an asymmetric core cell (34) is shown. Such an approach may exhibit specifically interesting properties with respect to the implementation of polarisation maintaining fibres. In FIG. 30, the core is formed by placing one void with a larger cross-sectional area in an otherwise periodic Honeycomb structure.

A further step is to add more than one void of different dimensions in what is going to be the defect (or core) area, and such an example is shown in FIG. 31, where two larger holes is placed in opposite corners of a Honeycomb cell (35).

Another example of a defect created by a single void (36) of different (here larger) cross-sectional area than the cladding forming voids, is shown in FIG. 32, where a single low-index void has been introduced in a Kagomé cladding structure.

Similar to the Honeycomb lattice structures, one or more voids having a larger cross-sectional area may be introduced into the Kagomé structures. Such an example is shown in FIG. 33 using two enlarged voids (37).

The Kagomé cladding structure naturally also opens the possibility of forming defects by replacing a group of voids in a hexagonal core cell. In FIG. 34 all six voids (38) forming the core cell have been enlarged, whereas the same six voids (39) have been reduced in size as exemplified in FIG. 35.

Depending on the desired performance, it is naturally possible to further increase the number of voids with larger dimensions than the cladding structure forming voids. Fundamentally, the core defect area may be made up by holes of variable size only ensuring that a located core (or defect) mode may be located around the core cells. It will also be possible to create a defect by introducing a single (or a few) void(s) with a cross section that deviates significantly from the other voids forming the cladding structure, even



though the different voids have the same cross-sectional areas. Note also that this way of creating defects by locally modifying the lattice-forming voids can be applied on all the different described cladding structures. Note also, that although the presented examples have been made for voids/rods with circular cross sections, the present invention is not  
 5 limited to these. Triangular, squared and higher order polygons or distorted polygons are also included as well as other shapes such as elliptic and asymmetric polygons.

As previously described, core regions may be formed by the introduction of a low-index void placed in one of the cells of the cladding, whereby this specific defect cell becomes  
 10 able to guide light prohibited by the periodicity of the periodic cladding. However, the additional void does not necessarily have to be placed centrally in the core cell, but it may also be placed in an asymmetrical position as illustrated in FIG. 36, where a defect void (41) is placed away from the centre of the core cell, which in this example is surrounded by periodic Honeycomb cells (42).

15 In FIG. 37 a similar example using an asymmetrically placed additional hole (43) is presented for a Kagomé cladding cell structure (44). Such placement of the void in the core cell may be used for special mode field shaping for example in cases, where specific in- and out-coupling properties have to be fulfilled.

20 Another example of a more complex design of the core region, is shown in FIG. 38, where the defect is formed by two voids (45) with smaller diameters than the voids forming the Honeycomb cladding cells (42).

25 The voids in the core region (46) of the fibre may also, as illustrated in FIG. 39, be of the same dimensions as the cladding cell forming voids, or they may be of larger dimensions as the voids (47) illustrated in FIG. 40. Again, it must be noted that the defect forming voids in the core region does not have to be of equal size, and in the example of two voids in the core cell, one void (48) may be of dimensions as the voids forming the cladding cell (42)  
 30 and the other (49) may be of larger dimensions as shown in FIG. 41.

Yet further examples as the one illustrated in FIG. 42 may use one void (50) of smaller dimensions than the voids forming the cladding cell (42) and the other (49) may be of larger dimensions. There may also be situations as illustrated in FIG. 43, where one void  
 35 (50) may be of smaller dimensions as the voids forming the cladding cell (42) and the other



(50) may be of equal dimensions. It should be noted that the examples presented in FIG. 38-43, all have the same orientation of the line connection the two voids in the core cell, but this should in no way be seen as a preference to the possibility of placing the voids in the core cell. Indeed the two (or more) voids may not only have variable size, but they may also be placed in many different ways within the core cell, depending on the mode field shape requirements given by the specific application. Furthermore, even more voids than two may be placed in the core cell, and three, four or more voids may for specific applications be relevant for fibre fabrication. It should also be noted that the circular shaped cross-sections of the voids in the presented examples may be extended to include other shapes. Other possibilities include the introduction of groups of additional voids in different cladding structures than the Honeycomb cladding structure.

Examples of two-void defects in a Kagomé cladding structure is presented in FIG. 44-49, where different defect forming void cross-section areas are applied. Note also that the chosen orientation of the defect forming two-void structure is not the only possibility, and an infinite number of alternative locations (including random location within the core cell) may be used. Another important point is that the low-index spatial region, which forms the core, may extend much further than a single defect void/rod. Also connected voids/holes forming a single asymmetric super-void is covered by this invention.

The possibility of fabricating multi-core structures, is an interesting option for many future applications of optical fibres/waveguides, for instances in connection with spatial signal processing or as elements in complex coupler configurations. Such ideas have been suggested normal index-guiding waveguides, but the realisation of multi-core regions is technologically very difficult for standard fibres/waveguides. It is, therefore, a very attractive property of the PCF's that their fabrication (e.g., by stacking together tubes and rods) may allow relatively simple realisation of multi-core waveguides.

The present invention also includes such waveguides combining low-index core regions or low- and high-index regions, and among the examples of realistic embodiments are structures as shown in FIG. 50. In this example, the basic Honeycomb cell structure (60) has been used to form the photonic crystal cladding, and two low-index defects (61) has been introduced in neighbouring cells to form a region in which guided mode(s) may propagate. In FIG. 50, the defect voids have the same dimensions as the voids used to form the cladding structure.



Another example is presented in FIG. 51, in which the defect voids/holes (62) have smaller cross-section areas than the voids forming the cladding structure. By adjusting the relative sizes of the core (defect) voids compared to those of the cladding structure, means of mode shaping (and thereby waveguide property engineering) is obtained.

FIG. 52 illustrates an example in which the defect voids (63) have larger dimensions than the voids forming the Honeycomb cladding structure. It should be noted that the cross-sections of the defect voids/holes could be of any other shape than the circular one, and in the two core structure as discussed in this context, neither should the two defects have equal cross-sectional areas. A simple example of such a structure is shown in FIG. 53, where the two defect voids (64) and (65) have different cross-sectional areas. The void (64) has in this case a larger cross sectional area than the void (65), which has the same cross sectional-area as the voids forming the cladding structure.

Another possibility is shown in FIG. 54, where an embodiment with one void (64) of larger cross-sectional area and one void (66) of smaller cross-sectional area than the cladding forming voids is shown. Also here the simple Honeycomb structure with circular voids/holes has been shown as the example.

In FIG. 55 an alternative example is given in which one void (66) of smaller cross-sectional area and one void (65) of equal cross-sectional area as the cladding forming voids is shown. In the specific examples shown in FIG. 50-55, the defect voids have been placed centrally in the Honeycomb cells, but this is in no way a requirement within the present invention, since arbitrary locations of defect voids/holes within the unit cells may be applied with the purpose of engineering specific waveguiding properties. The idea of applying multiple defects in the periodic cladding cell structure is not limited to the simple Honeycomb unit cell, but may also be applied for other cladding structures.

One example is illustrated in FIG. 56, where an example is shown of a Kagomé cladding structure (68) with two defect voids (67) of equal dimensions as the voids used to form the cladding structure.

In FIG. 57, another embodiment shows a Kagomé cladding structure, which has been modified by two defect voids/holes (69) of smaller cross-section areas than the voids



forming the cladding structure. In analogy with the simple Honeycomb cladding examples previously discussed, the defects may also be of larger cross-sectional areas than the cladding structure forming voids as shown in FIG. 58, and different examples of two defect holes of different cross-sectional areas are illustrated for the Kagomé cladding structure in FIG. 59-61.

In all the examples shown in FIG. 50-61, the two defect voids/holes were placed in neighbouring cells, but this is not always preferable. For instance in cases, where weaker coupling or even no power coupling is needed, it may be advantageous to apply larger spacing between the multiple defects (or core) areas.

To exemplify this, the simple Honeycomb cladding structure has been shown together with two defects, which in FIG. 62 has been located in such a way that one cell (70) without defect is placed in between the two cells (71) containing defect voids. In the embodiment of FIG. 62, the defect forming voids have smaller cross-sectional areas than the voids forming the simple Honeycomb cladding structure.

Another example is presented in FIG. 63, where cells (72) with defect forming voids of equal cross-sectional area as the cladding forming voids is shown. Also defect cells formed by voids/holes of different cross-sectional areas may be used.

In FIG. 64, an example is shown in which two defects have been located in such a way that one cell (70) without defect is placed in between one cell (71) containing a smaller defect void and another cell (72) containing an equal sized defect void as those voids forming the cladding structure.

FIG. 65 shows an example where a cell (73) with a defect void of larger cross-section area is placed with a separation of one cell from another cell (71) with a smaller defect void. Two different combination examples with separated core areas in simple Honeycomb cladding structures are shown in FIG. 66-67. It should also be stressed that more than one cladding cell could be used to separate defect containing cells, and also more than two defects may be included in a single fibre.

Multiple defects in the periodic cladding cell structure may also be applied for other cladding structures. One example is illustrated in FIG. 68, where an example is shown of a



Kagomé cladding structure (74) with two defect voids (75) of smaller dimensions than the voids used to form the cladding structure, placed in with a separation of one cell (74) between the defect cells.

- 5 In FIG. 69, another embodiment shows a Kagomé cladding structure, which has been modified by two defect voids/holes (76) of equal cross-section areas as the voids forming the cladding structure. Also here one cladding cell has been used to separate the two defect cells.
- 10 In analogy with the simple Honeycomb cladding examples previously discussed, the defects may also be of larger cross-sectional areas than the cladding structure forming voids or of non-equal size as shown in different examples in FIG. 70-73, for the Kagome cladding structure. As it previously has been discussed, the defects may be formed by a combination of several voids/holes, and this approach may also be combined with the
- 15 multiple-core approach discussed in this part of the description. This leads to a wide range of design possibilities, where one defect may be constructed in one way (e.g., by a single void), while others may be constructed differently. This may not only be done with respect to cross-section but also with respect to the number of substructures that are to be used in the formation of the defects (for example may another defect be formed by three closely
- 20 spaced triangular voids/holes)

It has previously been mentioned that the use of voids with non-circular cross-sections may be applied for mode shaping purposes and because the physical properties given by the fabrication process may shape the individual voids in specific cross sections. All these

25 possibilities may be combined with all the previously mentioned combinations of different cladding structures, multi-element voids, single- or multiple defects etc. A few examples of voids with cross-sections different from the circular ones are shown in FIG. 74-81.

In FIG. 74, a simple Honeycomb cladding structure with circular voids (80) in the cladding

30 cells is shown for a case where the core (defect) site is formed by a void (81) with elliptical cross section. Such a design may provide a more pronounced birefringence. In FIG. 74, the cross-sectional area of the defect void (81) is larger than the cross-sectional area of the cladding forming voids (80). Another example is illustrated in FIG. 75, where a smaller void/hole (82) with elliptical cross section is placed in a simple Honeycomb cladding



structure. Note that the elliptical voids have been placed centrally in the Honeycomb cells, but other placements and orientations of the elliptical major axes may also be made.

FIG. 76 illustrates an example in which an elliptical core void (84) is placed centrally in a  
 5 Kagomé cladding structure formed by circular voids (83). In this specific embodiment, the cross-sectional area of the defect forming void is smaller than the voids in the cladding.

Another realisation is shown in FIG. 77, only in this case the orientation of the major axes of the elliptical defect is tilted 30 degrees compared to FIG. 76, and in the case of the  
 10 example of FIG. 77 the cross-sectional area is larger than the cross-sectional area of the cladding forming voids.

In FIG. 78, a core defect of arbitrary cross section (85) is shown in a simple Honeycomb cladding structure, and in FIG. 79 a core defect (86) of arbitrary cross-section is shown for  
 15 a Kagomé cladding structure.

Other combinations may also be considered in which the voids/holes forming the cladding structure have cross-sections different from the circular shape used in most examples. Such an example is shown in FIG. 80 in which a circular core forming defect void (87) is  
 20 placed centrally in a simple Honeycomb cladding structure realised by near-triangular shaped voids (88). It should be noted that the orientation of the cladding forming near-triangular voids (or voids with any different cross-sectional shape) may be individually adjusted by rotation as long as the desired PBG effect of the cladding is realised. The shown orientation is an optimised configuration.

25 FIG. 81 shows windmill shaped voids/holes forming the cladding in a Honeycomb structure. As in FIG. 80 it should be noted that the orientation of the cladding forming voids/holes may be individually adjusted by rotation as long as the desired PBG effect of the cladding is realised. The shown orientation is an optimised configuration.

30 Although the non-circular voids/holes in FIG. 80 and FIG. 81 have been illustrated for basic Honeycomb structures, non-circular voids/holes may as well be applied for defining Kagomé structures so as to adjust the PBG.



It should be noted that the combination of different cross-section shaped voids as shown in FIG. 74-81 may be adapted to multi-core configurations as shown in FIG. 62-73.

In FIG. 82 shows an example of a fibre amplifier comprising a length of the fibre according to the invention (87), an input signal which is to be amplified (88), an output signal which has been amplified (89) and a source of radiation (90) for providing a pump signal (91). The pump signal typically pumps a dopant which has been introduced into the length of fibre.

In FIG. 83 shows an example of a fibre laser for providing laser radiation comprising a length of the fibre according to the invention (92), an output signal (93), and a source of radiation (94) for providing a pump signal (95). The fibre laser further comprises means for reflecting (96) the signal travelling inside the laser cavity.

The PBG effect, which is the fundamental element of the low-index guiding property is obtained by the periodicity of the cladding structure. However, only a very limited number of periods is necessary in order to confine the electromagnetic field, and it will, consequently, be possible to use conventional overcladding of the part of the preform that contains the periodicity.

20

The in case of optical fibres, this overcladding could further more improve the strength of the fibre so as to provide a fibre that is easier to splice and cleave. In a first aspect of the overcladded fibre, a circular outer fibre cross-section could be imagined, so that standard fibre fixtures may be used. However, also other overcladding tubes could be imagined, e.g., square or hexagonally shaped outer fibre cross-sections, which may be preferred in the case of highly polarisation preserving fibres, where the outer shape of the fibre could facilitate the localisation of fibre primary axes etc.

As an alternative to the conventional overcladding approach, the strong mode confinement of the PBG fibres, could suggest another approach in which the fibre surrounding the core area is constructed by bundling capillary tubes into a close-packed arrangement according to the preferred design of the periodic cladding region. Outside of this periodic region, which have to be fixed in position, the outer fibre structure (corresponding to an outer cladding region) could be formed by packing of thinner glass rods, which could be mechanically shaken into place, because the key issue here not is to form a periodic



structure. When the preform then later is drawn into a fibre, the outer cladding structure is melted together to form a (near) solid outer cladding. The only requirement for the outside placement of thin glass rods is that the surface tension due to an uneven distribution outside the periodic part of the fibre, do not result in a significant deformation of the

5 periodicity.

PCF's with new functionalities may be fabricated by introducing regions within the fibres with special doping materials, or even materials that deviates significantly from the fibre basis material (e.g., glass, or polymers). These additional materials could for instance be

10 rare-earth dopants, specially ultra-violet (UV) sensitive materials, or even semiconductors or metals.

The fabrication process may comprise the introduction of thin rods of doped (or different) material at well-defined locations in the closely packed, periodic basis material structure.

15 Alternatively, some of the capillary tubes could be made from a doped material, or the preform (or parts of it) could even be placed in solutions of materials that could diffuse or bind to the basis material rods and tubes. Since specific parts of the preform could be treated individually before further stacking or alternative processing would continue, this approach allows for a very high degree of flexibility.



## CLAIMS

1. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

5

- a core region extending along the longitudinal direction,
  - a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising
- 10 primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction,

15 defined by at least one unit cell, wherein, for each unit cell:

- a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and not enclosing any part of any primary elements, and
- 20 - one or more further elongated elements are provided each of which
- has an area not exceeding  $1/6$  of the area of that primary element having its centre within the unit cell and having the largest area,
  - has a refractive index being lower than that of any material adjacent thereto,
  - has a centre not positioned outside the unit cell, and
- 25 - does not cover the centre of the first circle.

2. An optical fibre according to claim 1, wherein the one or more further elements each has an area not exceeding  $1/8$ , the area of that primary element having its centre within the unit cell and having the largest area.

30

3. An optical fibre according to claim 1, wherein, for the unit cell, a second circle is defined being the largest possible circle having its centre not positioned outside the unit cell, and where the second circle not comprising any parts of the first or further elongated elements, and where the area of the second circle is smaller than that of the first circle.

35



4. An optical fibre according to claim 3, wherein the area of the second circle is 90% or less than that of the first circle.

5. An optical fibre according to claim 3, the centre of first circle at least substantially  
5 coincides with the centre of the second circle.

6. An optical fibre according to claim 1, wherein the centres of those primary elements, parts of which are within a distance of 1.5 or less times the radius of the first circle from the centre of the first circle, define the vertices of a polygon with three or more sides.

10

7. An optical fibre according to claim 6, wherein the polygon is a regular polygon.

8. An optical fibre according to claim 6, wherein the polygon is chosen from the group consisting of a triangular, rectangular, quadratic, or hexagonal polygon.

15

9. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,

20

- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than  
25 a refractive index of any material adjacent to the elongated elements,

the periodic structure being defined, in a cross-section perpendicular to the longitudinal direction, by a unit cell, where the sum of all areas of elongated elements, which areas are comprised within the unit cell, is larger than 1.2 times the area of that primary element  
30 having its centre axis not positioned outside the unit cell and having the largest area.

10. An optical fibre according to claim 9, wherein the sum of all areas of elongated elements comprised within the unit cell is larger than 1.3 times the area of that primary element having its centre axis not positioned outside the unit cell and having the largest  
35 area.



11. An optical fibre according to claim 9, wherein the periodic structure comprises secondary elongated elements having a refractive index being larger than that of any material adjacent thereto and to any material being adjacent to a primary element.

5

12. An optical fibre according to claim 11, wherein, for a unit cell, the sum of all areas of secondary elements within the unit cell is larger than 0.25 times the area of a secondary element having its centre axis not positioned outside the unit cell and having the largest area.

10

13. An optical fibre according to claim 11, wherein, for a unit cell, the sum of all areas of secondary elements within the unit cell is larger than 0.05 times the area of the primary element having its centre axis not positioned outside the unit cell and having the largest area.

15

14. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,

20

- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by a unit cell, and where a polygon is defined:

- having centres of primary elements in its vertices,

30 - not enclosing any centres of other primary elements than those having their centres at the vertices of the polygon, and

- having an area less than or equal to that of the unit cell,

where a first circle is defined as the smallest circle possible having its centre positioned

35 within the polygon, and which comprises the vertices of the polygon,



and where the area of the circle divided by the area of the polygon is less than 2.4.

15. An optical fibre according to claim 14, wherein the polygon is a regular polygon and the  
5 first circle is that circumscribing the polygon.

16. An optical fibre according to claim 14, wherein the polygon has four or more sides.

17. An optical fibre according to claim 16, wherein the polygon is quadratic or a hexagonal  
10 polygon.

18. An optical fibre with a waveguide structure having a longitudinal direction, said optical  
fibre having:

- 15 - a core region extending along the longitudinal direction,
- a cladding region extending along the longitudinal direction, said cladding region  
comprising an at least substantially two-dimensionally periodic structure comprising  
primary, elongated elements each having a centre axis extending in the longitudinal  
20 direction of the waveguide, the primary elements having a refractive index being lower than  
a refractive index of any material adjacent to the primary elements,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction,  
defined by a unit cell, where, in each unit cell:

25

$$n_d \Lambda_2 > n_{ud} \Lambda_1 (\sqrt{3})$$

where

- $n_d$  is the largest index of refraction within a first circle which is defined as a largest  
circle possible having a centre not positioned outside the unit cell and not enclosing any  
30 part of any primary element,
- $n_{ud}$  is a largest index of refraction not positioned outside the unit cell but outside any  
of the first circles of the unit cells,
- $\Lambda_1$  is a smallest distance between centre axes of two primary elements within the  
periodic structure,



-  $\Lambda_2$  is a distance between the centre of the first circle of the unit cell and the centre of the first circle of an adjacent unit cell.

19. An optical fibre according to claim 18, wherein, for each unit cell:  $n_d \Lambda_2 > 2 n_{ud} \Lambda_1$ .

5

20. An optical fibre according to claim 18, wherein, in each unit cell,  $n_d$  is at least substantially identical to  $n_{ud}$ .

21. An optical fibre according to claim 18, wherein, in each unit cell,  $n_d > n_{ud}$ .

10

22. An optical fibre according to claim 18, wherein  $n_{ud}$  is and  $n_d$  is selected within the interval of 1-10.

23. An optical fibre according to claim 18, wherein the unit cell comprises further elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the cross-sectional area of each of the further elements being less than 1/6 of a cross-sectional area of that primary element, having its centre within the unit cell, having the largest cross-sectional area.

24. An optical fibre according to claim 23, wherein:

$$n_d \Lambda_2 > (\sqrt{3}) n_{ud} \Lambda_3$$

where

25 -  $n_d$  is the largest index of refraction within a first circle which is defined as a largest circle possible having a centre not positioned outside the unit cell and not enclosing any part of any primary element,

-  $n_{ud}$  is a largest index of refraction not positioned outside the unit cell but outside any of the first circles of the unit cells,

30 -  $\Lambda_3$  is a smallest distance between centre axes of two primary or further elements within the periodic structure,

-  $\Lambda_2$  is a smallest distance between the centres of two adjacent first circles.

25. An optical fibre according to claim 24, wherein, for each unit cell:  $n_d \Lambda_2 > 2 n_{ud} \Lambda_3$

35



26. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,
- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements having a refractive index being lower than a refractive index of any material adjacent to the primary elements,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by at least one unit cell, where, for each unit cell, a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and not enclosing any part of any primary elements,

where more than 3 first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle.

27. An optical fibre according to claim 26, wherein more than 4 first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle.

28. An optical fibre according to claim 26, wherein the parts of the first primary elements exist within a distance of 1.1 or less times the radius of the first circle from the centre of the first circle.

29. An optical fibre according to claim 26, wherein the first primary elements define a polygon having 3-6 sides and having centres of first primary elements in its vertices, each of the first primary elements not having centres in the vertices being positioned with its centre axis no further from a side of the polygon than  $1/5$  of a length of that side.

30. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:



- a core region extending along the longitudinal direction,
- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising
  - 5 primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, each primary element having a refractive index being lower than a refractive index of any material adjacent to the primary element,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction,  
 10 defined by a unit cell, and where, for each unit cell, one or more polygons are defined as:

- a first polygon is defined as having its vertices at centres of first primary elements selected by:
  - defining a first circle as the largest circular area possible having a centre not
    - 15 positioned outside the unit cell and not enclosing any part of any primary elements,
    - selecting the first primary elements as those having not positioned further away from the centre of the first circle than 1.2 times the radius of the first circle,
  - for each area, if any, of the unit cell, which area is not comprised within a first polygon, an additional polygon is defined as having its vertices at centres of
    - 20 additional primary elements selected by:
      - defining an additional circle as the largest circular area possible having a centre not positioned outside the area and not enclosing any part of any primary elements,
      - selecting the additional primary elements as those having their centres not
        - 25 positioned further away from the centre of the additional circle than 1.2 times the radius of the additional circle,

the periodic structure comprising deviating primary elements having a shape deviating from a circular shape and having extending parts defined as those parts of the shape of the  
 30 deviating primary element extending outside a circle having the same area as that of the deviating primary element and having its centre at a centre of the deviating primary element, each extending part extending toward one of those primary elements which together with which the deviating primary element defines a side of a polygon in the periodic structure,



each extending part extending toward a primary element and having an area being larger than 3% of the area of the circle.

31. An optical fibre according to claim 30, wherein at least one extending part has an axis of symmetry at least substantially coinciding with a line intersecting the centre of the circle and the centre of a primary element with which the deviating primary element defines a side.

32 An optical fibre according to claim 30, wherein at least one extending part extends a distance of at least 5% of the radius of the circle and in a direction away from the centre of the circle.

33. An optical fibre according to claim 30, wherein a first circle is defined as the smallest possible circle having its centre positioned within the first polygon, and which comprises (meaning: within or on the boundary) the vertices of the first polygon.

34. An optical fibre according to claim 30, wherein the first polygon has four or more sides.

35. An optical fibre according to claim 34, wherein the first polygon is a hexagonal.

36 An optical fibre according to claim 30, wherein the first polygon is regular.

37. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

- a core region extending along the longitudinal direction,
- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal direction of the waveguide, the primary elements each having a refractive index being lower than a refractive index of any material adjacent to the primary element,

the periodic structure being, in a cross-section perpendicular to the longitudinal direction, defined by a unit cell, and where a polygon is defined:



- 5

38. An optical fibre according to claim 37, wherein one or more further elongated elements are provided each of which

- where:

- 20 39. An optical fibre according to claim 38, wherein the one or more further elongated elements each has an area not exceeding  $1/8$  of the area of that primary element having its centre within the unit cell and having the largest area.

41. An optical fibre according to claim 37, wherein the structure is defined by the regular hexagonal polygon and a regular triangle having a side length corresponding to that of the regular hexagonal polygon, and where hexagonal polygons exist, each side of which is shared with a triangle.

42. An optical fibre according to claim 1, wherein the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of



any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a centre axis extending in the longitudinal direction of the fibre.

43. An optical fibre according to claim 42, wherein, in each unit cell, a secondary element is  
5 provided having its centre axis within the first circle.

44. An optical fibre according to claim 14, wherein the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of any material adjacent thereto or adjacent to any primary elements, the secondary elements  
10 each has a centre axis extending in the longitudinal direction of the fibre.

45. An optical fibre according to claim 44, wherein, in each unit cell, a secondary element is provided having its centre axis within the first circle.

15 46. An optical fibre according to claim 18, wherein the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a centre axis extending in the longitudinal direction of the fibre.

20 47. An optical fibre according to claim 46, wherein, in each unit cell, a secondary element is provided having its centre axis within the first circle.

48. An optical fibre according to claim 26, wherein the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of  
25 any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a centre axis extending in the longitudinal direction of the fibre.

49. An optical fibre according to claim 48, wherein, in each unit cell, a secondary element is provided having its centre axis within the first circle.

30

50. An optical fibre according to claim 33, wherein the periodic structure further comprises one or more secondary elongated elements having a refractive index higher than that of any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a centre axis extending in the longitudinal direction of the fibre.

35



51. An optical fibre according to claim 50, wherein, in each unit cell, a secondary element is provided having its centre axis within the first circle.

52. An optical fibre according to claim 37, wherein the periodic structure further comprises  
 5 one or more secondary elongated elements having a refractive index higher than that of any material adjacent thereto or adjacent to any primary elements, the secondary elements each has a centre axis extending in the longitudinal direction of the fibre.

53. An optical fibre according to claim 52, wherein, in each unit cell, a secondary element is  
 10 provided having its centre axis within the first circle.

54. An optical fibre with a waveguide structure having a longitudinal direction, said optical fibre having:

15 - a core region extending along the longitudinal direction,

- a cladding region extending along the longitudinal direction, said cladding region comprising an at least substantially two-dimensionally periodic structure comprising primary, elongated elements each having a centre axis extending in the longitudinal  
 20 direction of the waveguide, the primary elements each having a refractive index being lower than a refractive index of any material adjacent to the primary element,

the periodic structure further comprising secondary, elongated elements each having a refractive index being larger than that of any material adjacent thereto and any material  
 25 adjacent to a primary element, each secondary element having a centre axis extending in the longitudinal direction of the fibre.

55. An optical fibre according to claim 54, wherein the periodic structure is, in a cross-section perpendicular to the longitudinal direction, defined by at least one unit cell, where,  
 30 for each unit cell, a first circle is defined as the largest circular area possible having a centre not positioned outside the unit cell and not enclosing any part of any primary elements, where a secondary element is provided having its centre axis within the first circle.



56. An optical fibre according to claim 55, wherein a plurality of first primary elements exist, parts of which exist within a distance of 1.2 or less times the radius of the first circle from the centre of the first circle, a polygon being defined as having its vertices at the centres of the plurality of first primary elements, the polygon being a regular, hexagonal polygon.

5

57. An optical fibre according to claim 56, wherein, in the periodic structure, hexagonal polygons exist, all sides of which are common to another hexagonal polygon.

58. An optical fibre according to claim 56, wherein the structure is defined by the hexagonal  
10 polygon and a regular triangle having a side length corresponding to that of the regular hexagonal polygon, and where hexagonal polygons exist, each side of which is common to a triangle.

59. An optical fibre according to claim 1, wherein the core region comprises a first  
15 additional elongated element extending in the longitudinal direction of the fibre.

60. An optical fibre according to claim 59, wherein the first additional element is a void.

61. An optical fibre according to claim 59, wherein the additional element or any material  
20 adjacent thereto comprises a dopant or a material showing higher order optical effects.

62. An optical fibre according to claim 59, wherein the core region comprises a second  
additional elongated element, the first and second additional elements being positioned at  
25 a distance where light travelling in one additional element is able to couple to the other additional element.

63. An optical fibre according to claim 14, wherein the core region comprises a first  
additional elongated element extending in the longitudinal direction of the fibre.

30 64. An optical fibre according to claim 63, wherein the first additional element is a void.

65. An optical fibre according to claim 63, wherein the additional element or any material  
adjacent thereto comprises a dopant or a material showing higher order optical effects.



66. An optical fibre according to claim 63, wherein the core region comprises a second additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other additional element.

5

67. An optical fibre according to claim 18, wherein the core region comprises a first additional elongated element extending in the longitudinal direction of the fibre.

68. An optical fibre according to claim 67, wherein the first additional element is a void.

10

69. An optical fibre according to claim 67, wherein the additional element or any material adjacent thereto comprises a dopant or a material showing higher order optical effects.

70. An optical fibre according to claim 67, wherein the core region comprises a second

15 additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other additional element.

71. An optical fibre according to claim 26, wherein the core region comprises a first

20 additional elongated element extending in the longitudinal direction of the fibre.

72. An optical fibre according to claim 71, wherein the first additional element is a void.

73. An optical fibre according to claim 71, wherein the additional element or any material

25 adjacent thereto comprises a dopant or a material showing higher order optical effects.

74. An optical fibre according to claim 71, wherein the core region comprises a second

additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other

30 additional element.

75. An optical fibre according to claim 33, wherein the core region comprises a first

additional elongated element extending in the longitudinal direction of the fibre.

35 76. An optical fibre according to claim 75, wherein the first additional element is a void.



78. An optical fibre according to claim 75, wherein the core region comprises a second additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other additional element.

80. An optical fibre according to claim 79, wherein the first additional element is a void.

82. An optical fibre according to claim 79, wherein the core region comprises a second additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other additional element.

25

85. An optical fibre according to claim 83, wherein the additional element or any material adjacent thereto comprises a dopant or a material showing higher order optical effects.

86. An optical fibre according to claim 83, wherein the core region comprises a second additional elongated element, the first and second additional elements being positioned at a distance where light travelling in one additional element is able to couple to the other additional element.



87. An optical fibre according to claim 1 the fibre comprising a plurality of core regions.

88. An optical fibre according to claim 87, wherein the core regions are positioned symmetrically within the periodical structure, a period of the core regions being larger than  
5 a period of the periodical structure.

89. An optical fibre according to claim 14, the fibre comprising a plurality of core regions.

90. An optical fibre according to claim 89, wherein the core regions are positioned  
10 symmetrically within the periodical structure, a period of the core regions being larger than a period of the periodical structure.

91. An optical fibre according to claim 18, the fibre comprising a plurality of core regions.

15 92. An optical fibre according to claim 91, wherein the core regions are positioned symmetrically within the periodical structure, a period of the core regions being larger than a period of the periodical structure.

93. An optical fibre according to claim 26, the fibre comprising a plurality of core regions.  
20

94. An optical fibre according to claim 93, wherein the core regions are positioned symmetrically within the periodical structure, a period of the core regions being larger than a period of the periodical structure.

25 95. An optical fibre according to claim 33, the fibre comprising a plurality of core regions.

96. An optical fibre according to claim 95, wherein the core regions are positioned symmetrically within the periodical structure, a period of the core regions being larger than a period of the periodical structure.  
30

97. An optical fibre according to claim 37, the fibre comprising a plurality of core regions.

98. An optical fibre according to claim 97, wherein the core regions are positioned symmetrically within the periodical structure, a period of the core regions being larger than  
35 a period of the periodical structure.



99. An optical fibre according to claim 44, the fibre comprising a plurality of core regions.

100. An optical fibre according to claim 99, wherein the core regions are positioned  
5 symmetrically within the periodical structure, a period of the core regions being larger than a period of the periodical structure.

101. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

10

- a length of the optical fibre according to claim 1, wherein the core region comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,

- means for providing the liquid or gas into the void of the core region,

15 - means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be determined,

- means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

20

102. A sensor according to claim 101, wherein the introducing means are adapted to introduce the light into the first additional element.

103. A sensor according to claim 101, wherein the core region comprises a second,  
25 elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.

30 104. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

- a length of the optical fibre according to claim 14, wherein the core region comprises at least a first additional element, the first element being a void extending along

35 the longitudinal direction of the fibre,



- means for providing the liquid or gas into the void of the core region,
  - means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be determined,
- 5 - means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

105. A sensor according to claim 104, wherein the introducing means are adapted to introduce the light into the first additional element.

10

106. A sensor according to claim 104, wherein the core region comprises a second, elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one additional element is able to couple to the other additional element, and wherein the

15 introducing means are adapted to introduce the light into the second additional element.

107. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

- 20 - a length of the optical fibre according to claim 18, wherein the core region comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
- means for providing the liquid or gas into the void of the core region,
  - means for introducing light into the core region, the light being adapted to interact
- 25 with the gas or liquid in a manner so that the characteristic of the liquid or gas may be determined,
- means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

30 108. A sensor according to claim 107, wherein the introducing means are adapted to introduce the light into the first additional element.

109. A sensor according to claim 107, wherein the core region comprises a second, elongated element extending in the longitudinal direction of the fibre, where the first and

35 second additional elements are positioned at a distance where light travelling in one



additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.

110. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the  
5 sensor comprising:

- a length of the optical fibre according to claim 26, wherein the core region comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
- 10 - means for providing the liquid or gas into the void of the core region,
- means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be determined,
- means for detecting light emitted from the fibre and for determining the  
15 characteristic of the liquid or gas.

111. A sensor according to claim 110, wherein the introducing means are adapted to introduce the light into the first additional element.

20 112. A sensor according to claim 110, wherein the core region comprises a second, elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.

25 113. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

- a length of the optical fibre according to claim 33, wherein the core region  
30 comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
- means for providing the liquid or gas into the void of the core region,
- means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be  
35 determined,



- means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

114. A sensor according to claim 113, wherein the introducing means are adapted to  
5 introduce the light into the first additional element.

115. A sensor according to claim 113, wherein the core region comprises a second, elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one  
10 additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.

116. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

- 15
- a length of the optical fibre according to claim 37, wherein the core region comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
  - means for providing the liquid or gas into the void of the core region,
  - 20 - means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be determined,
  - means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

25

117. A sensor according to claim 116, wherein the introducing means are adapted to introduce the light into the first additional element.

118. A sensor according to claim 116, wherein the core region comprises a second,  
30 elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.



119. A sensor for sensing or detecting at least one characteristic of a liquid or gas, the sensor comprising:

- a length of the optical fibre according to claim 44, wherein the core region  
5 comprises at least a first additional element, the first element being a void extending along the longitudinal direction of the fibre,
- means for providing the liquid or gas into the void of the core region,
- means for introducing light into the core region, the light being adapted to interact with the gas or liquid in a manner so that the characteristic of the liquid or gas may be  
10 determined,
- means for detecting light emitted from the fibre and for determining the characteristic of the liquid or gas.

120. A sensor according to claim 119, wherein the introducing means are adapted to  
15 introduce the light into the first additional element.

121. A sensor according to claim 119, wherein the core region comprises a second, elongated element extending in the longitudinal direction of the fibre, where the first and second additional elements are positioned at a distance where light travelling in one  
20 additional element is able to couple to the other additional element, and wherein the introducing means are adapted to introduce the light into the second additional element.

122. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

- 25 - a length of optical fibre according to 1, wherein the core region comprises a dopant material along at least part of the length, and
- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

30

123. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

- a length of optical fibre according to claim 14, wherein the core region comprises a dopant material along at least part of the length, and

35



- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

124. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

5

- a length of optical fibre according to claim 18, wherein the core region comprises a dopant material along at least part of the length, and

· means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

125. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

- a length of optical fibre according to claim 26, wherein the core region comprises a dopant material along at least part of the length, and

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

20 126. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

- a length of optical fibre according to claim 33, wherein the core region comprises a dopant material along at least part of the length, and

25 - means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

127. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

30 - a length of optical fibre according to claim 37, wherein the core region comprises a dopant material along at least part of the length, and

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.



128. A fibre amplifier for amplifying an optical signal, said fibre amplifier comprising:

- a length of optical fibre according to claim 44, wherein the core region comprises  
5 a dopant material along at least part of the length, and
- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal.

10 129. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 1, wherein the core region comprises  
a dopant material along at least part of the length,
- 15 - means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and
- feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the  
20 length of the optical fibre so as to further amplify the optical signal.

130. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 14, wherein the core region comprises  
25 a dopant material along at least part of the length,
- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and
- 30 - feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.



131. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 18, wherein the core region comprises a dopant material along at least part of the length,

5

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and

- feedback means for selectively feeding back at least part of the amplified

10 optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

132. A fibre laser for outputting laser radiation, said fibre laser comprising:

15 - a length of optical fibre according to claim 26, wherein the core region comprises a dopant material along at least part of the length,

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and

20

- feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

25 133. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 33, wherein the core region comprises a dopant material along at least part of the length,

30 - means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and



- feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

5 134. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 37, wherein the core region comprises a dopant material along at least part of the length,

10 - means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and

· feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.

135. A fibre laser for outputting laser radiation, said fibre laser comprising:

- a length of optical fibre according to claim 44, wherein the core region comprises  
20 a dopant material along at least part of the length,

- means for providing pump radiation to the dopant material for pumping the dopant material so as to amplify the optical signal, and

25 - feedback means for selectively feeding back at least part of the amplified optical signal so as to repeatedly pass the amplified optical signal through the length of the optical fibre so as to further amplify the optical signal.



## ABSTRACT

An optical fibre having a periodical cladding structure providing an photonic band gap structure with superior qualities. The periodical structure being one wherein high index  
5 areas are defined and wherein these are separated using a number of methods. One such method is the introduction of additional low index elements, another method is providing elongated elements deformed in relation to a circular cross section. Also described is a cladding structure comprising elongated elements of a material having an index of refraction higher than that of the material adjacent thereto. Using this additional material,  
10 prior art structures may obtain much better qualities.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
221



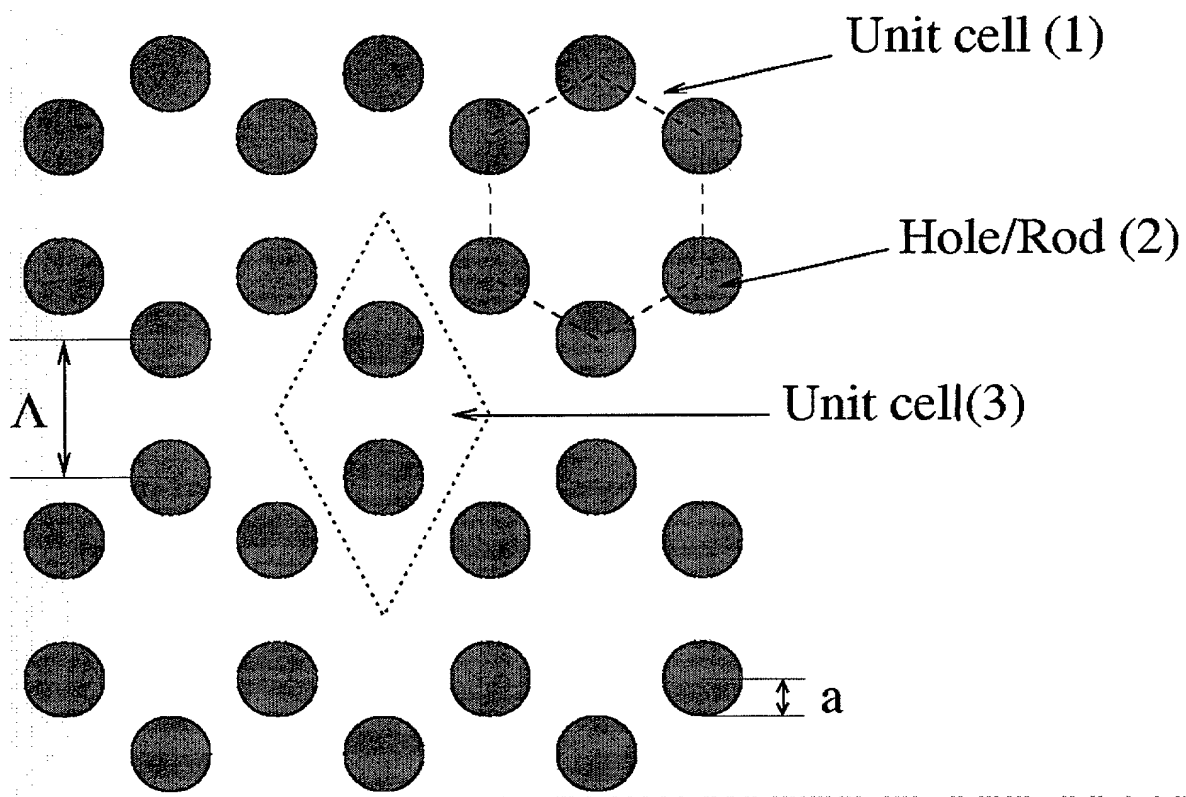


Fig 1





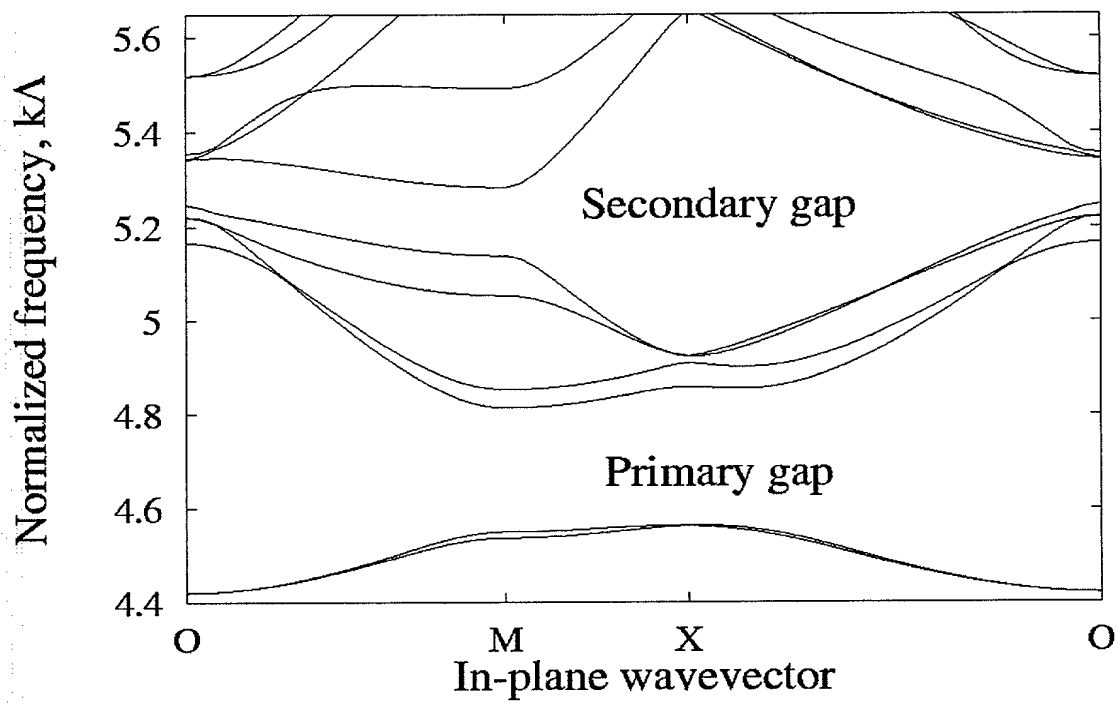


Fig 2

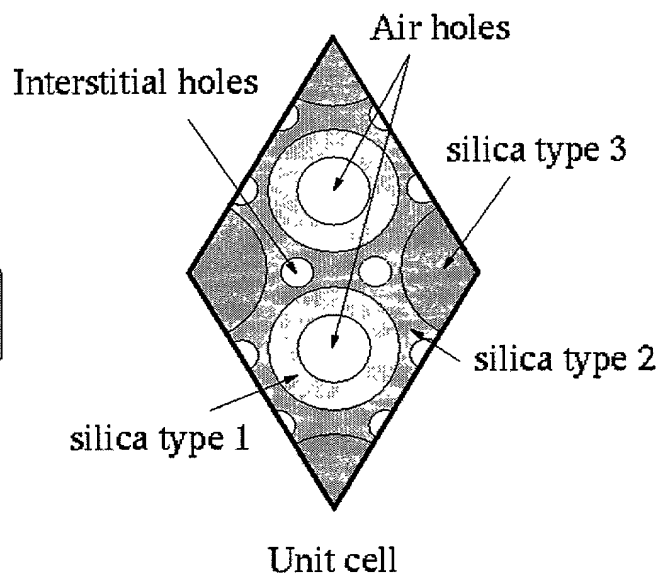

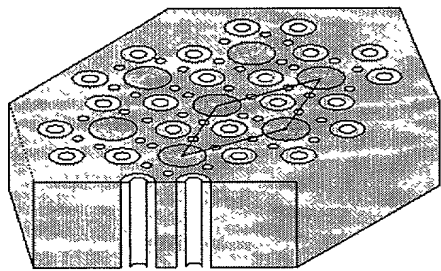

Fis<sup>3</sup>





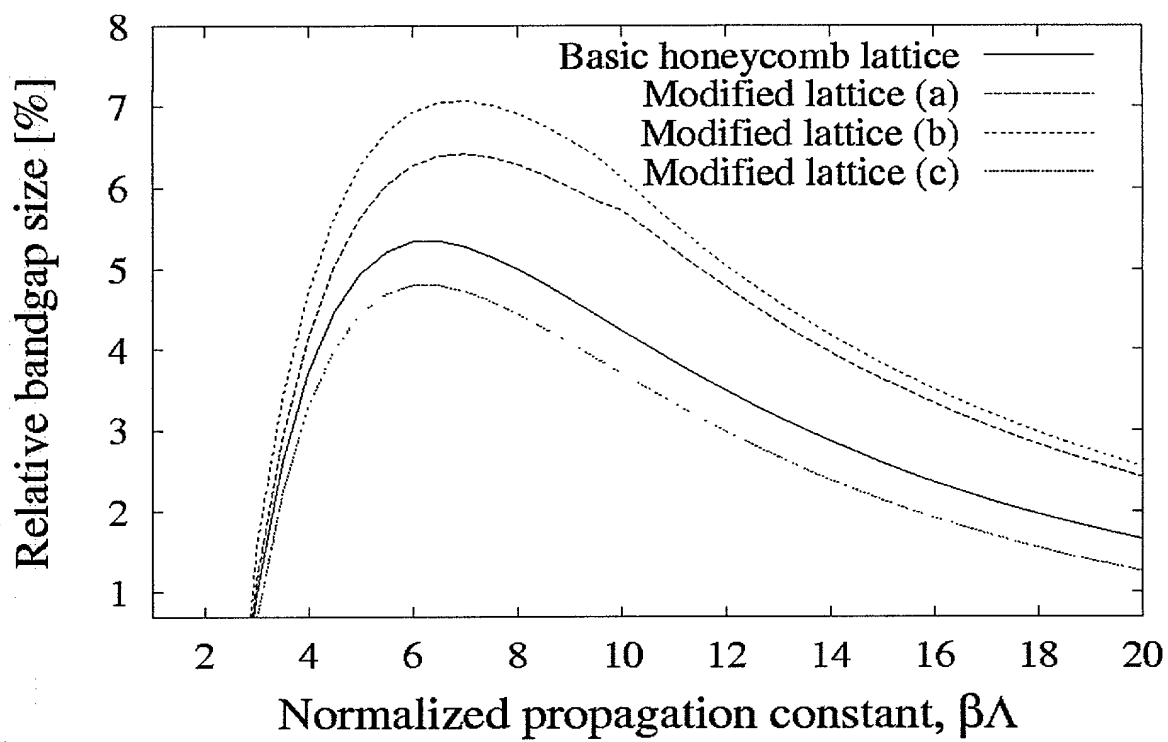



Fig 4



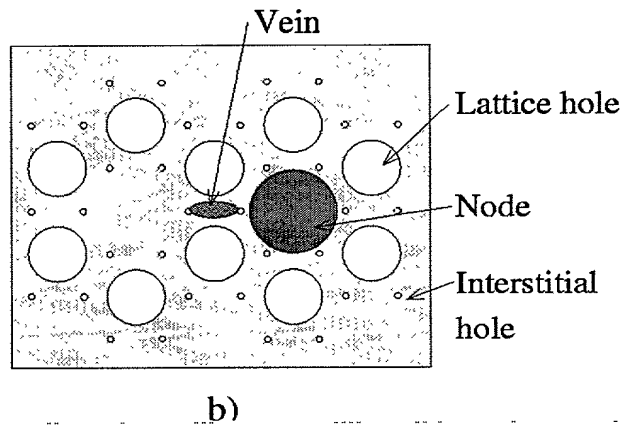

Fis5

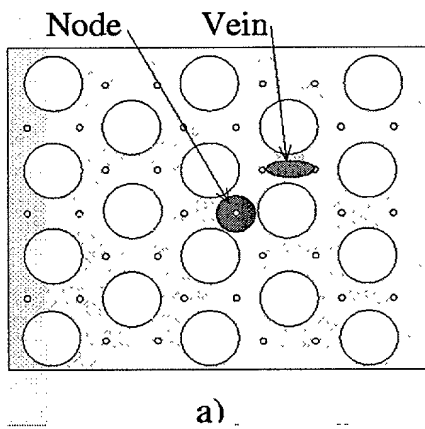

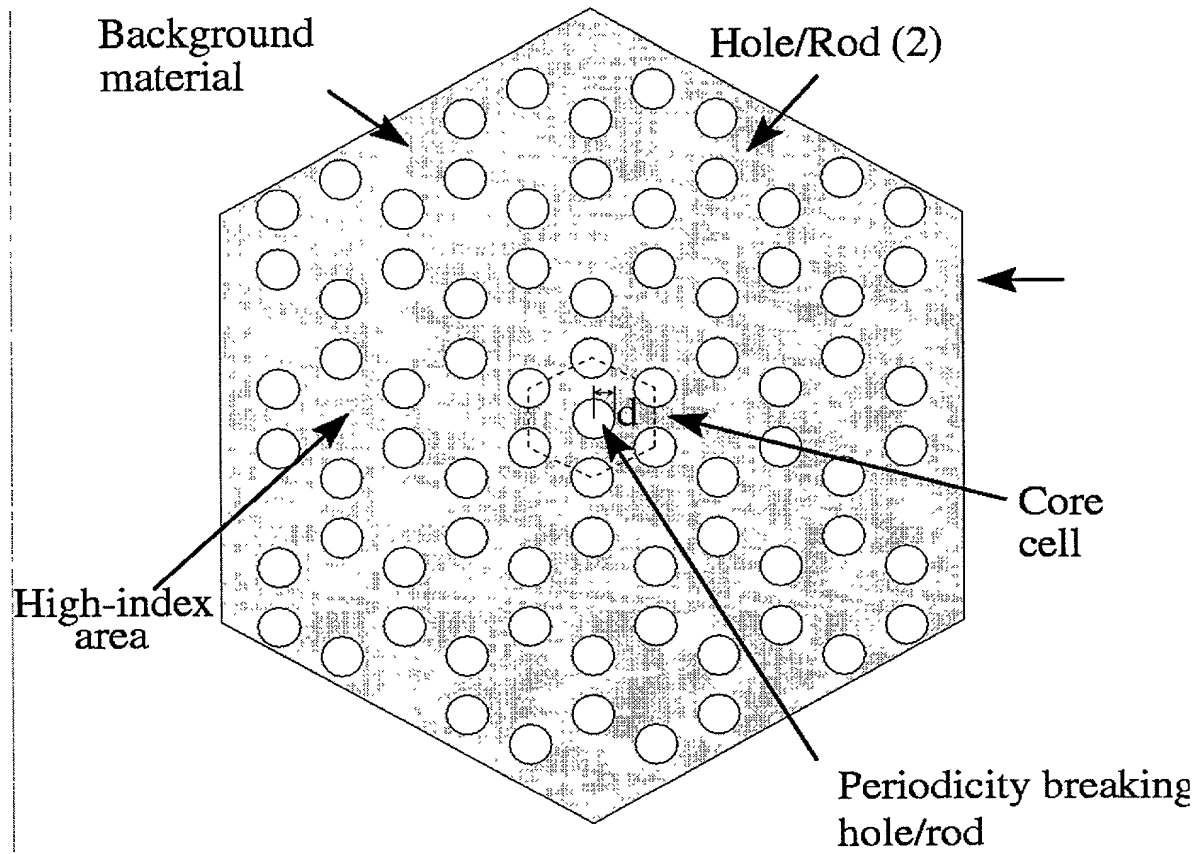

F.56



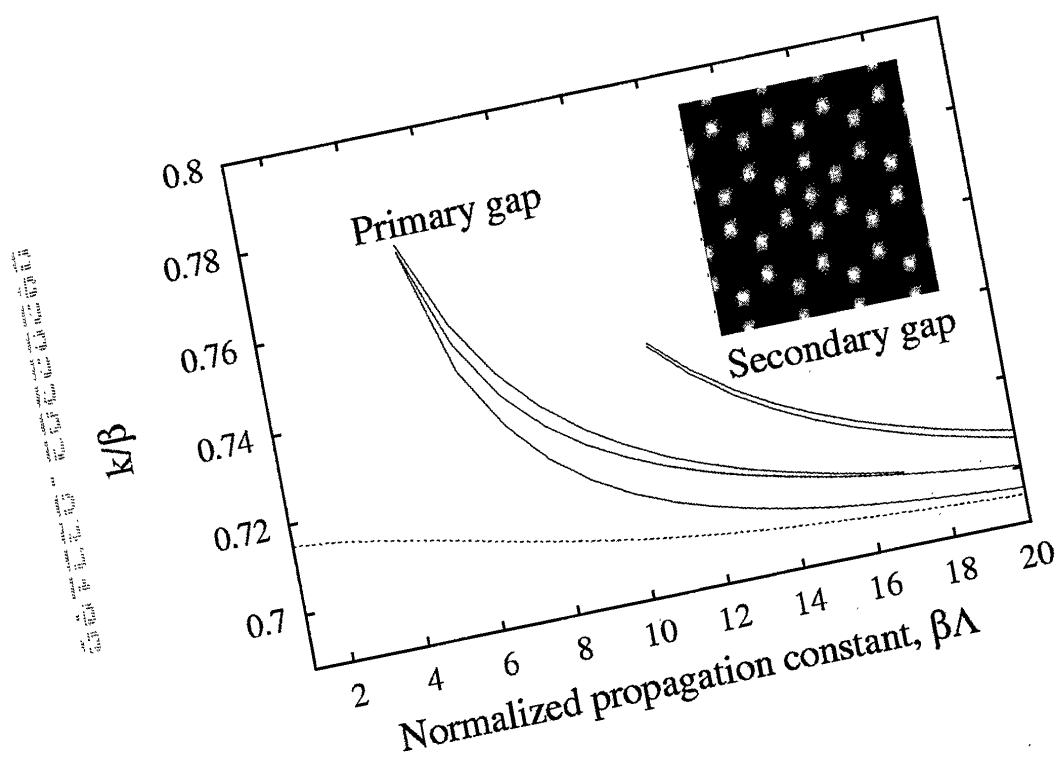


Fig 2







Mode index  $\beta/\kappa$

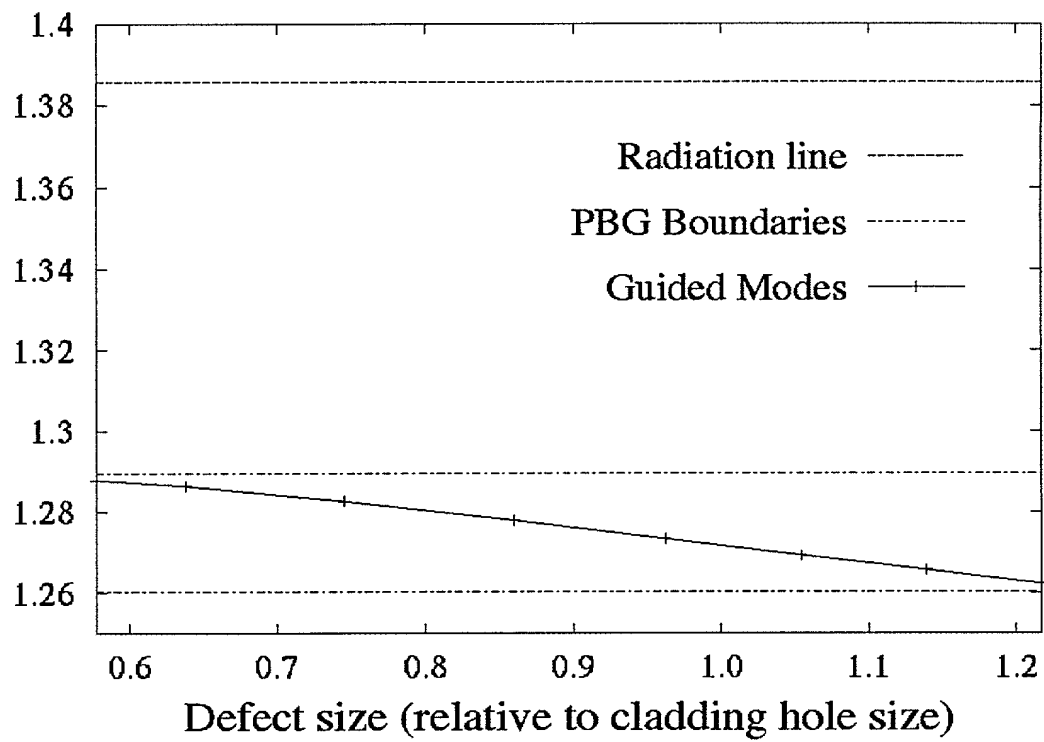


Fig 9



# Triangular lattice

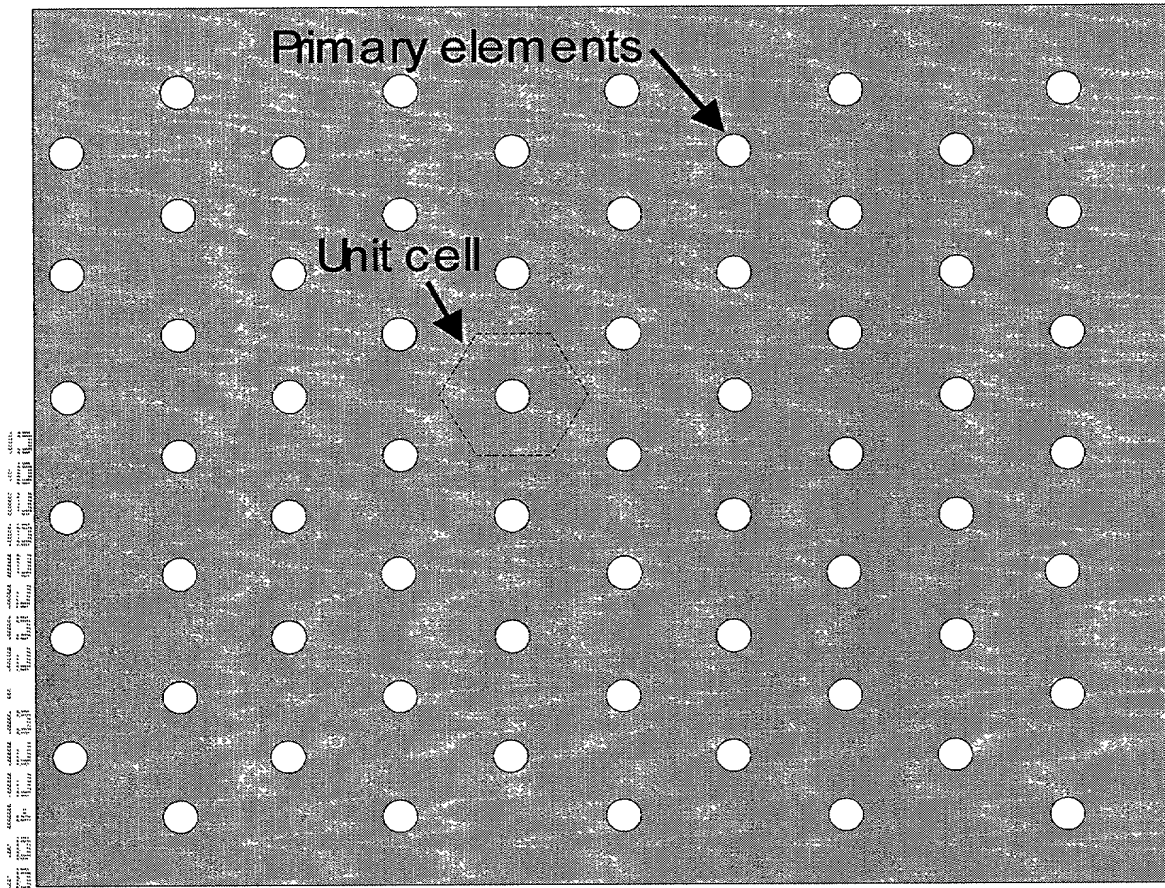


Fig 10



# Triangular lattice

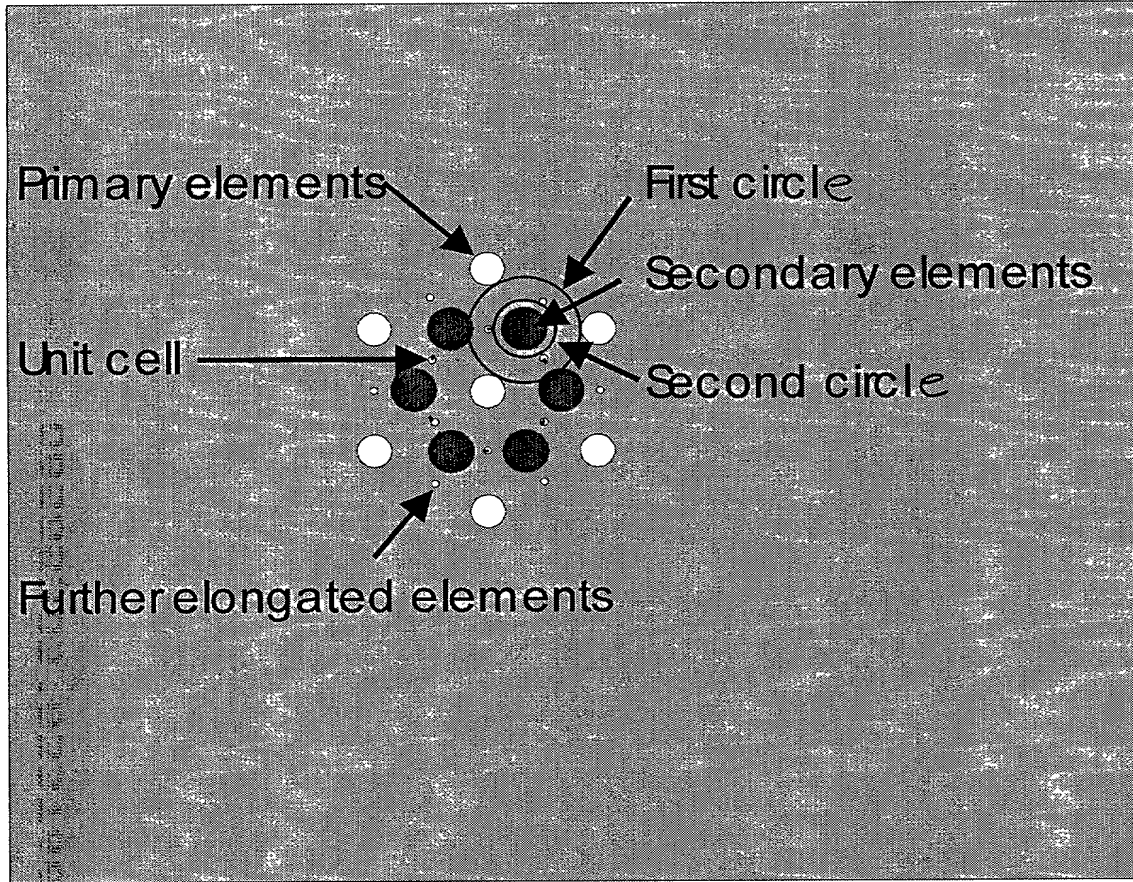


Fig 11



# Honeycomb lattice

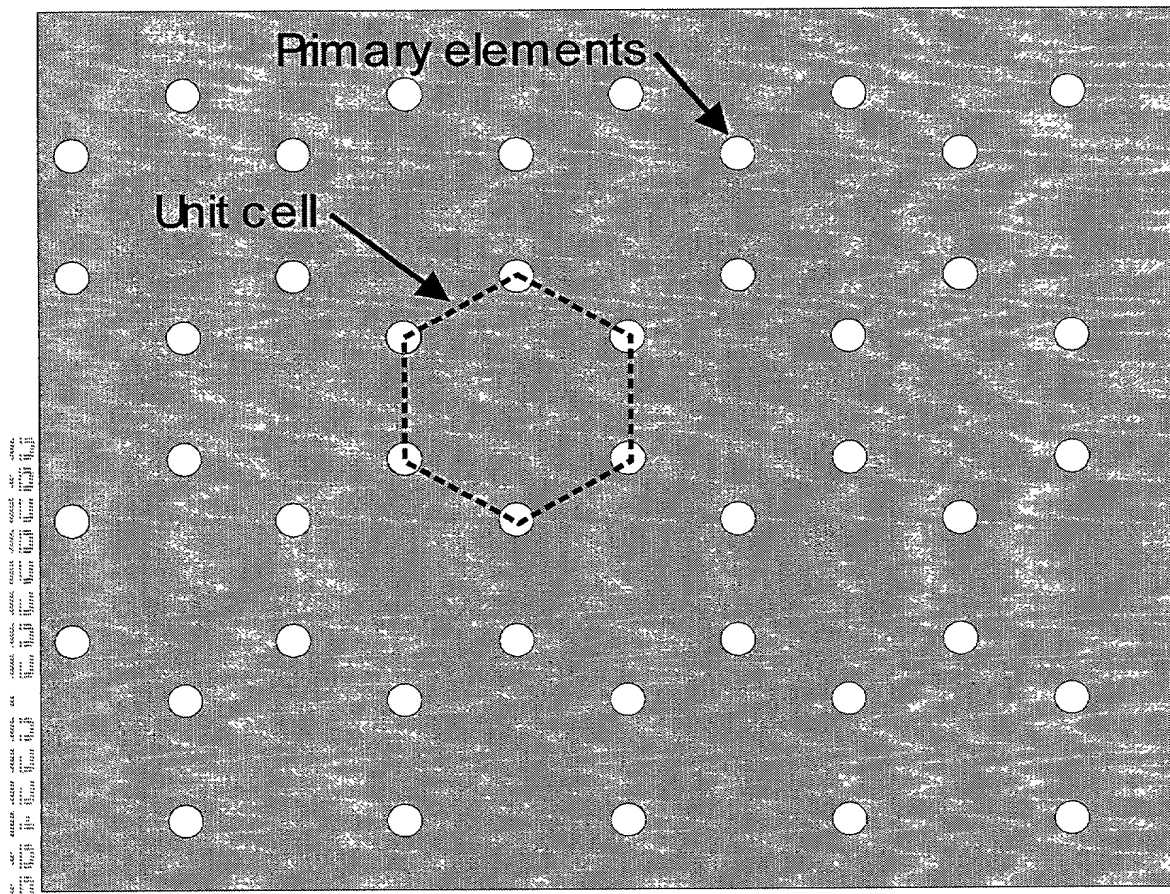


Fig 12



# Honeycomb lattice


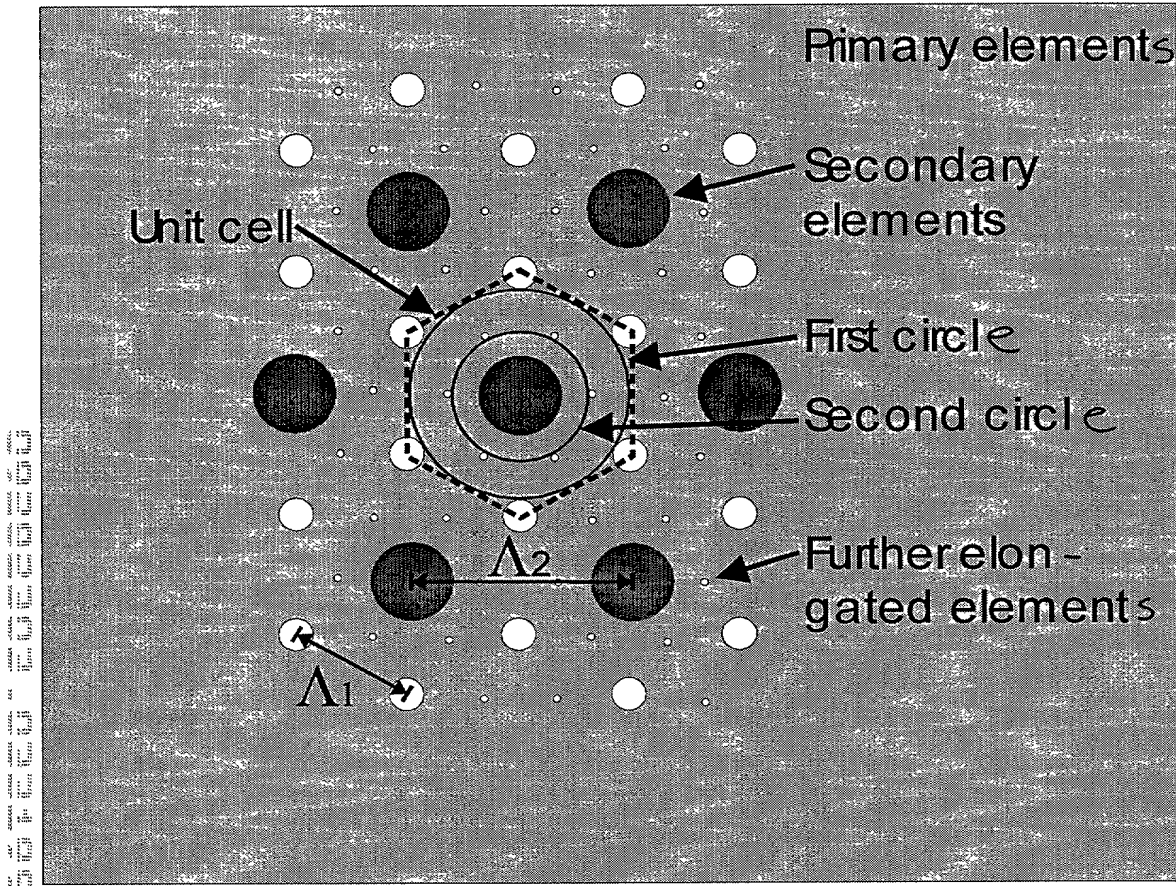


Fig 13



# Kagomé lattice

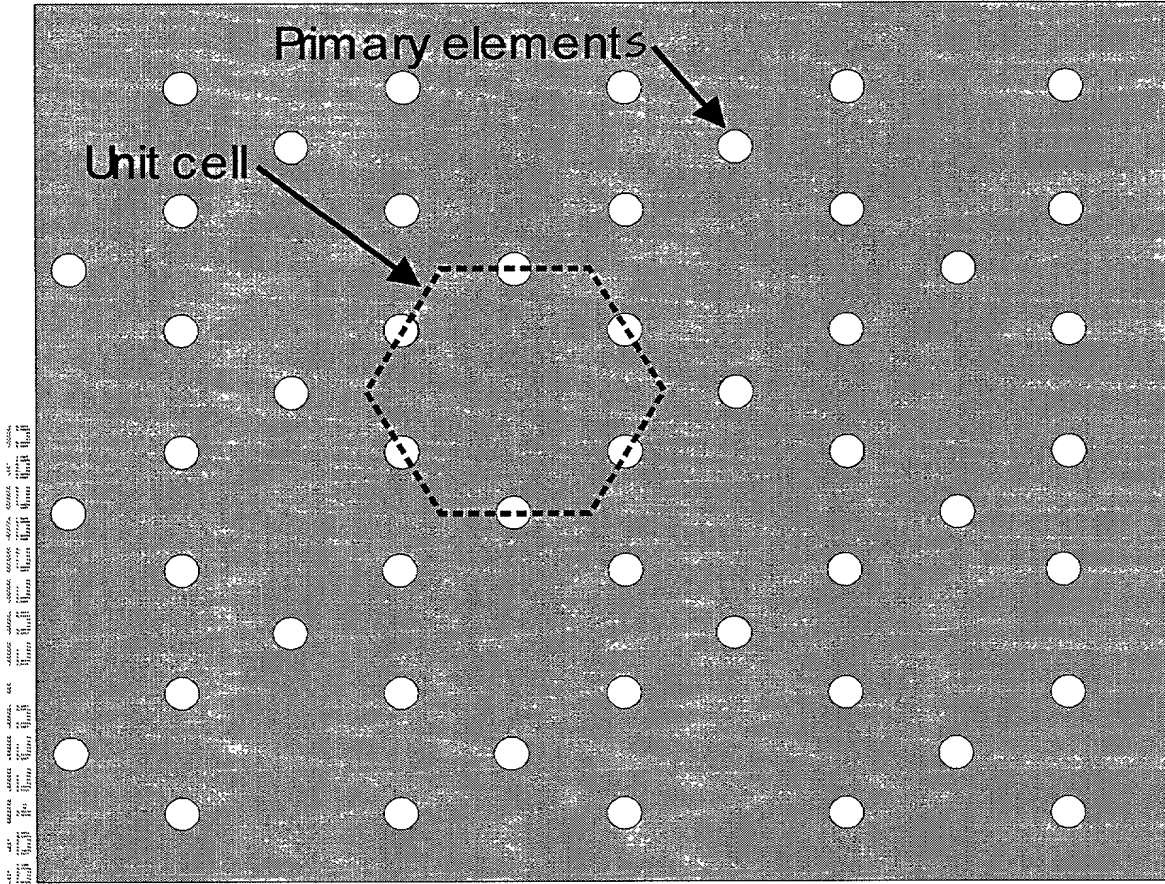

Fis 14



# Kagomé lattice

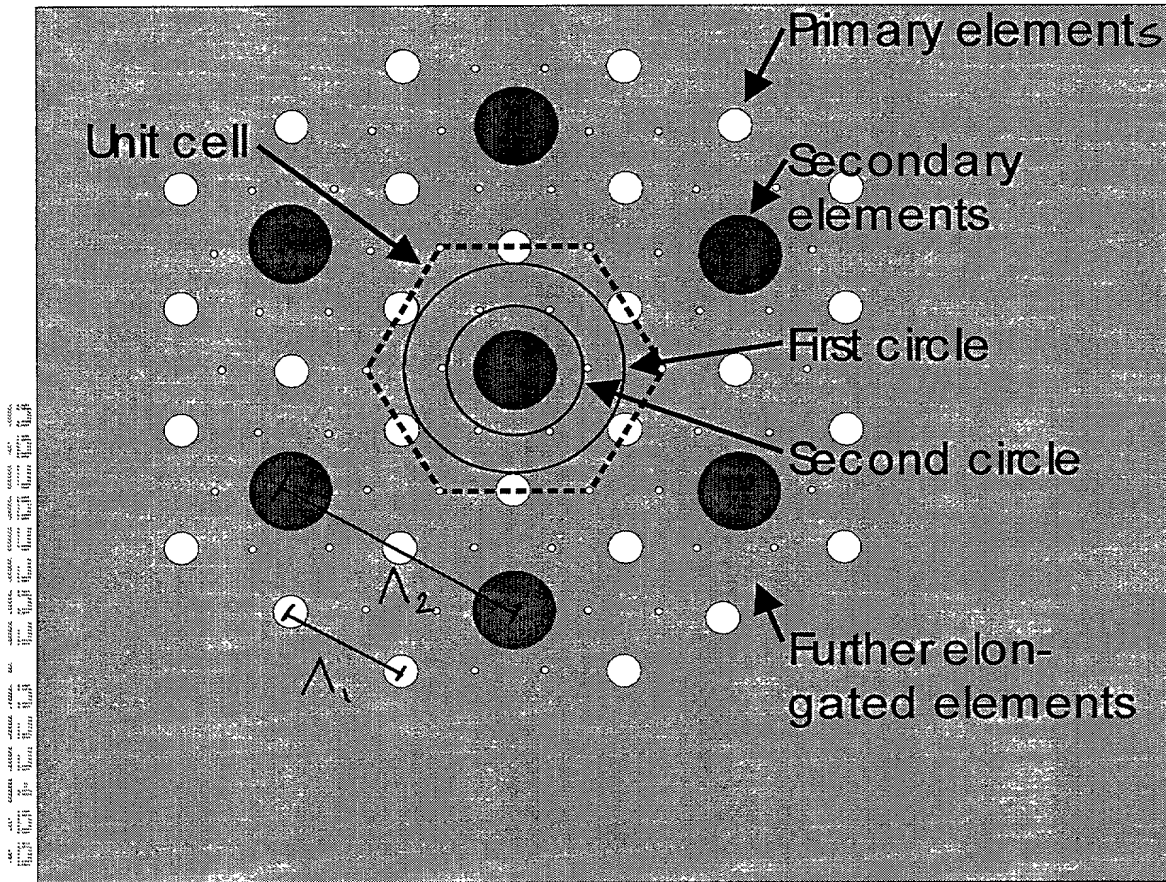


Fig 15



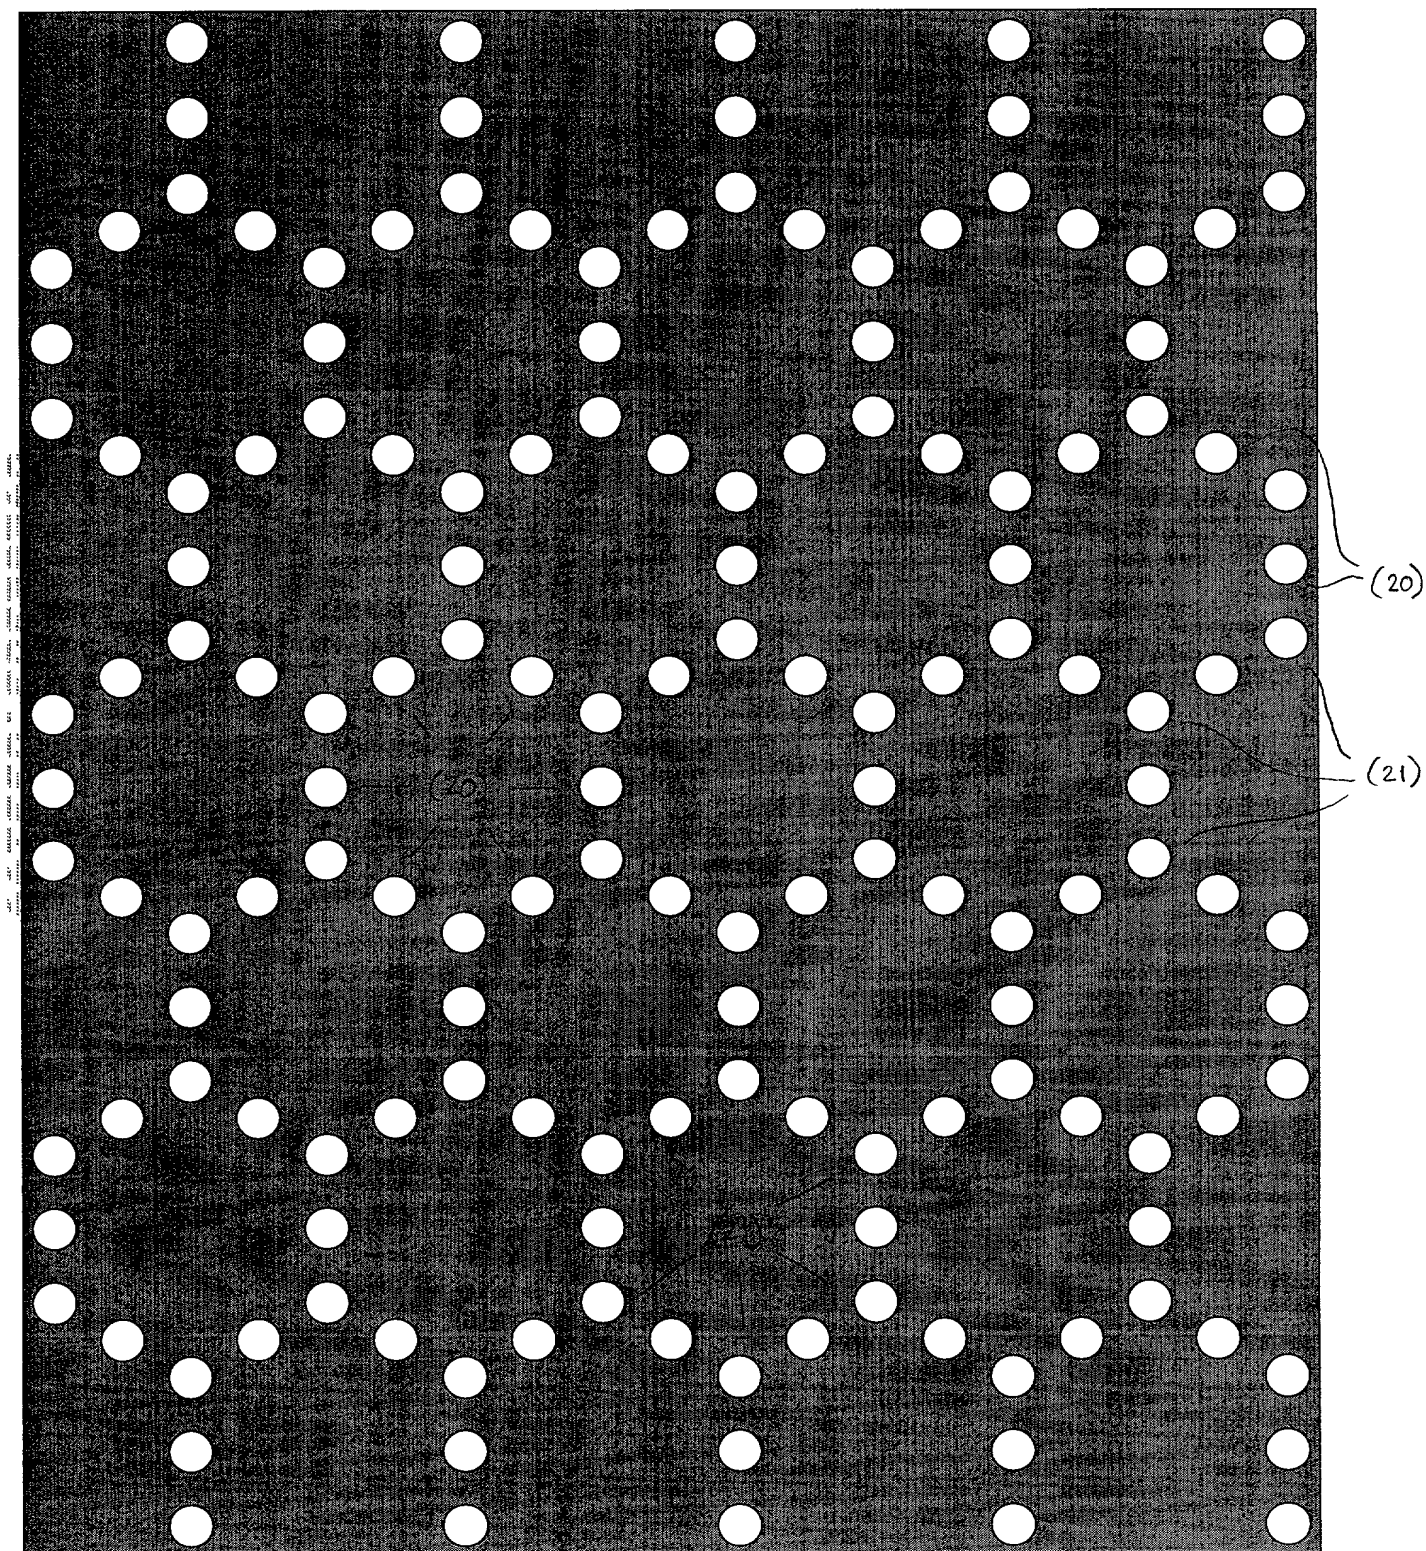


FIG 16



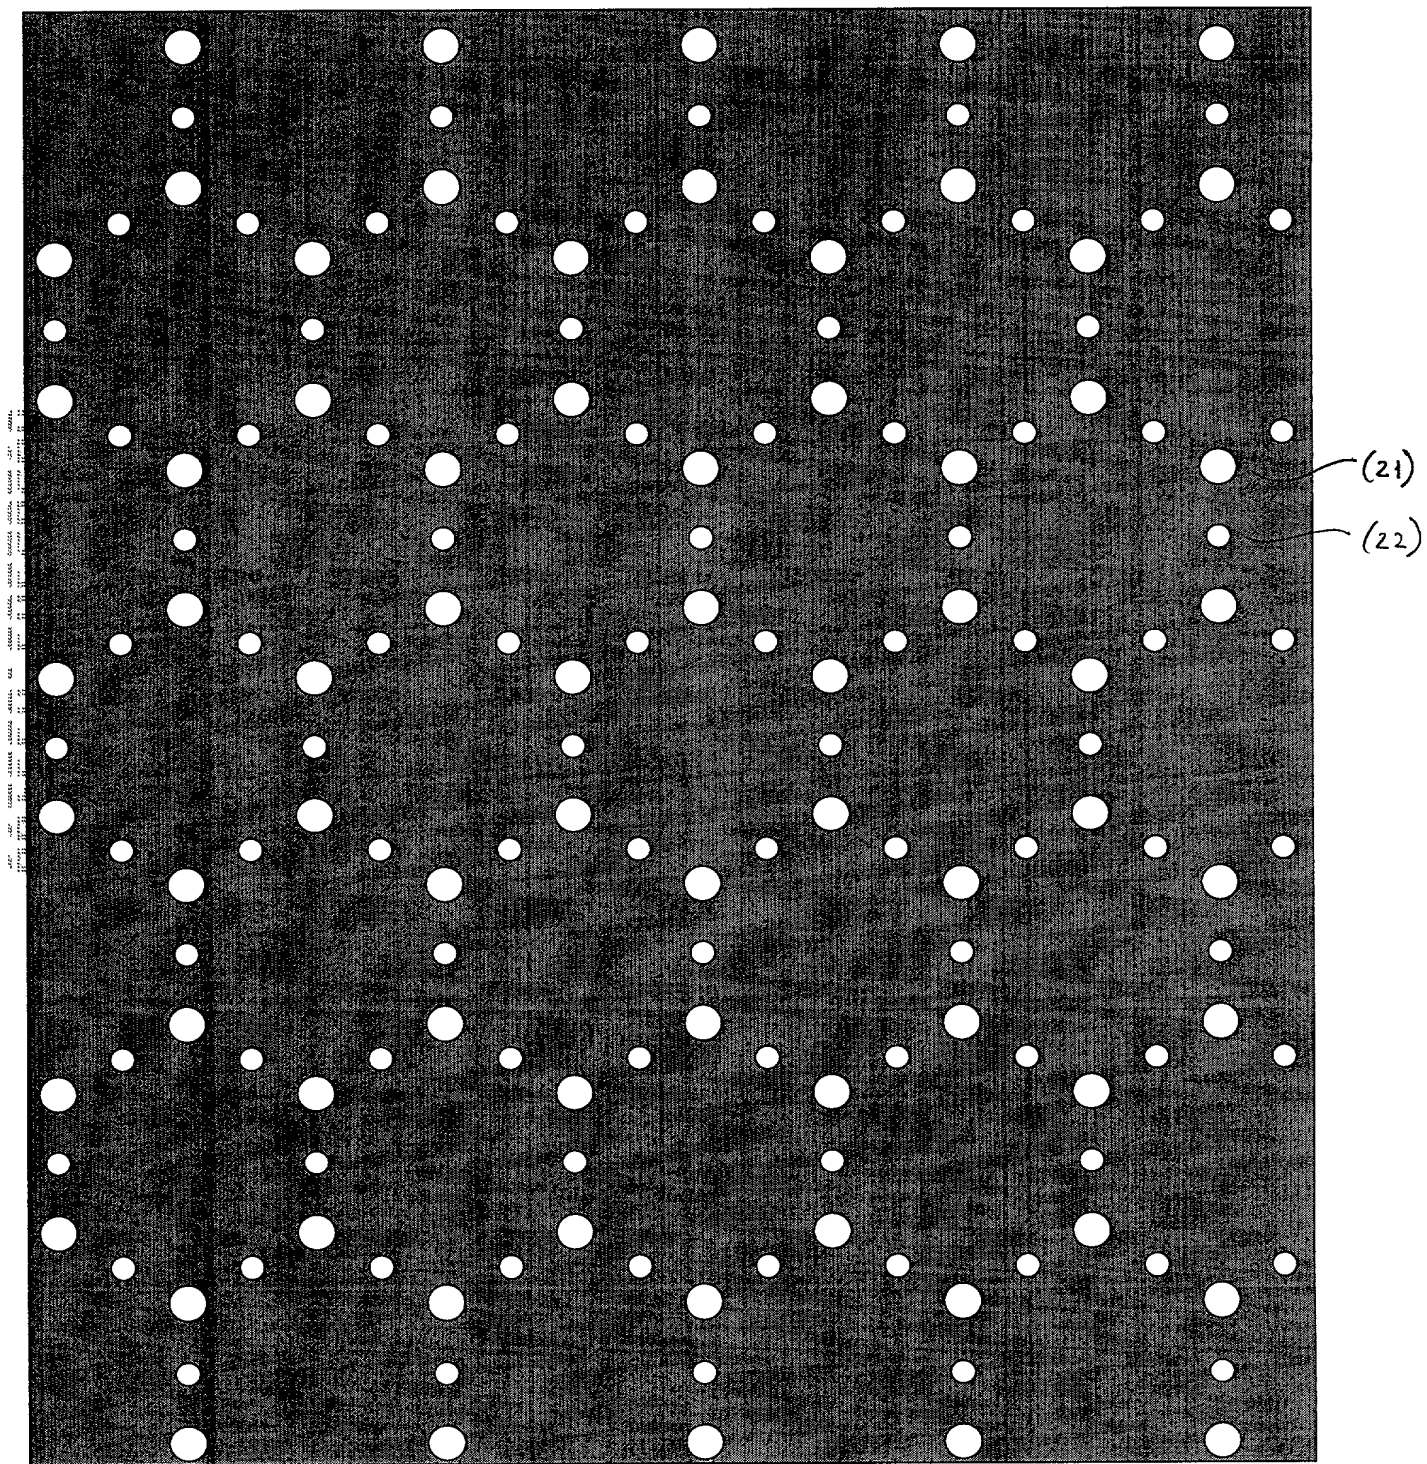


FIG. 17



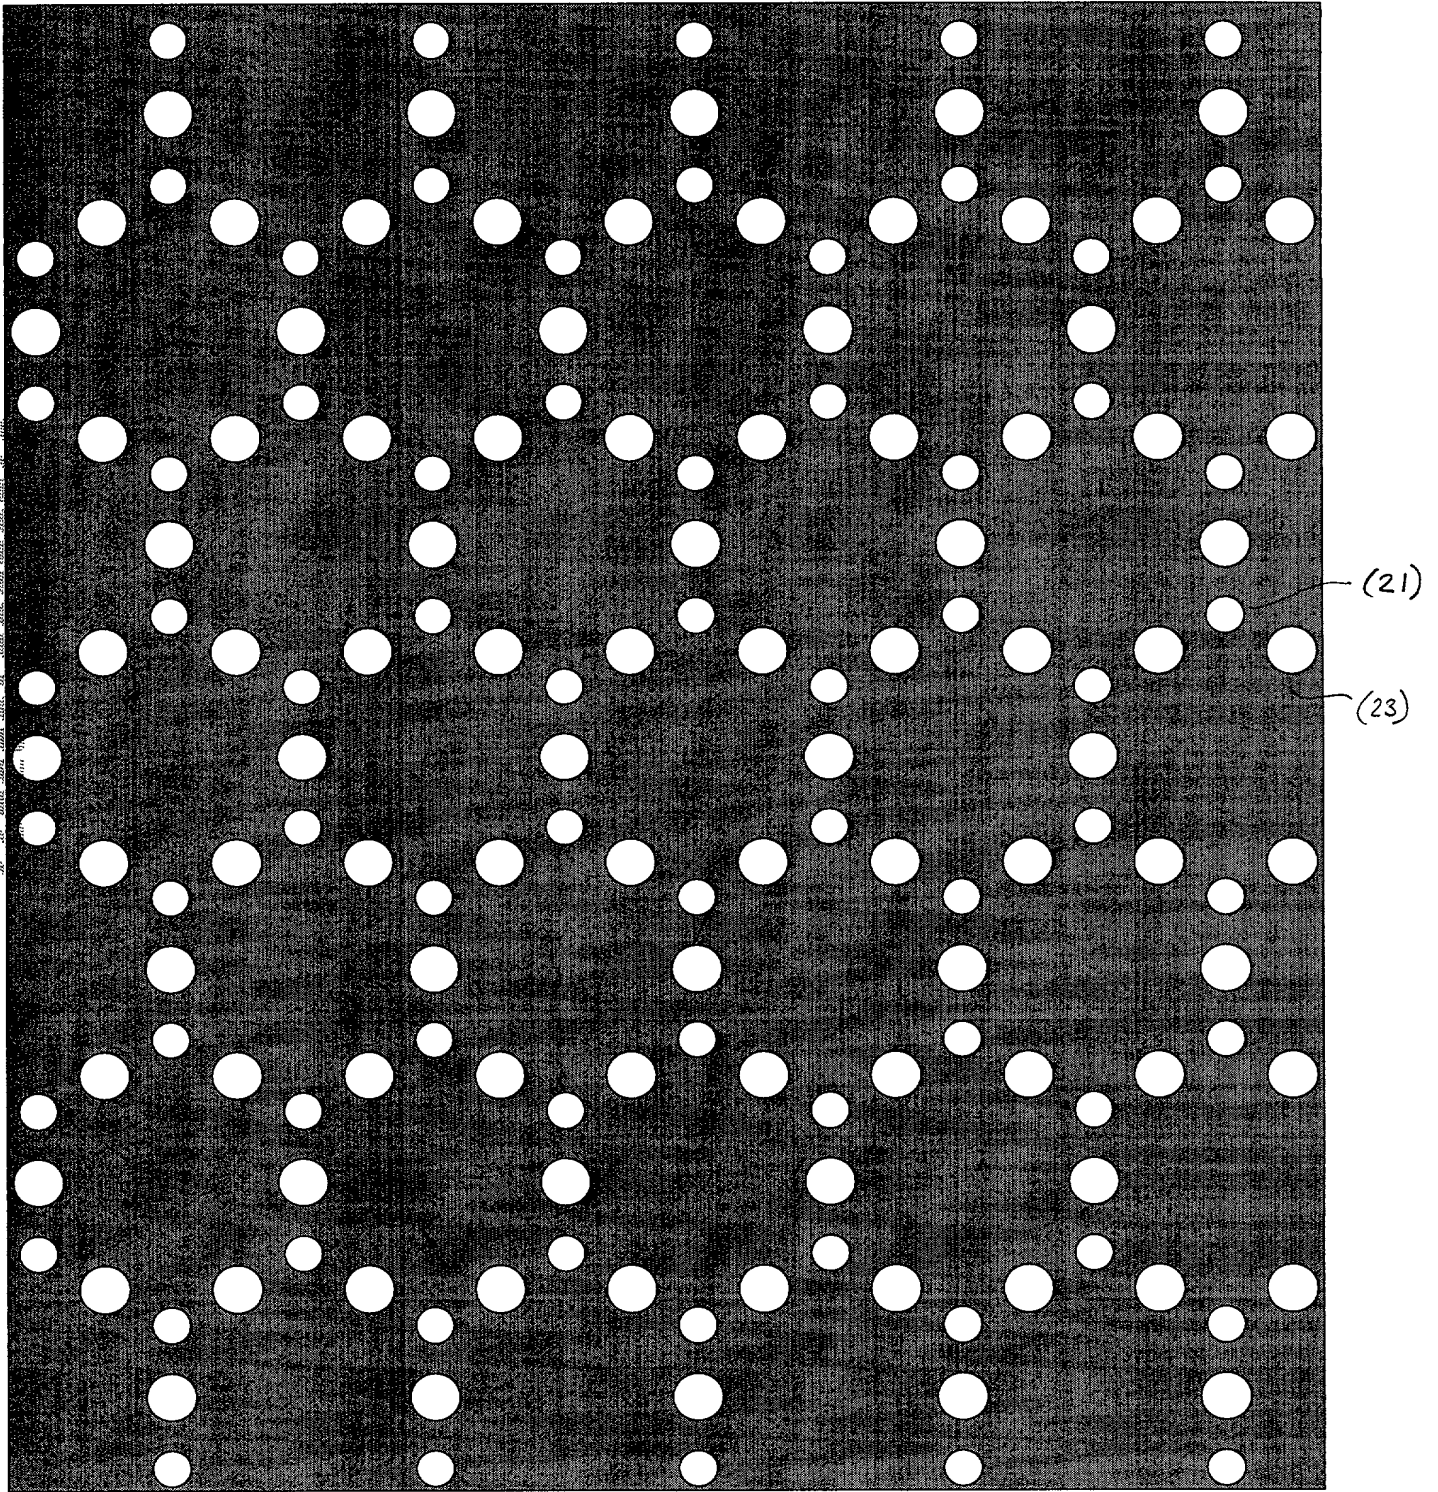


FIG. 18



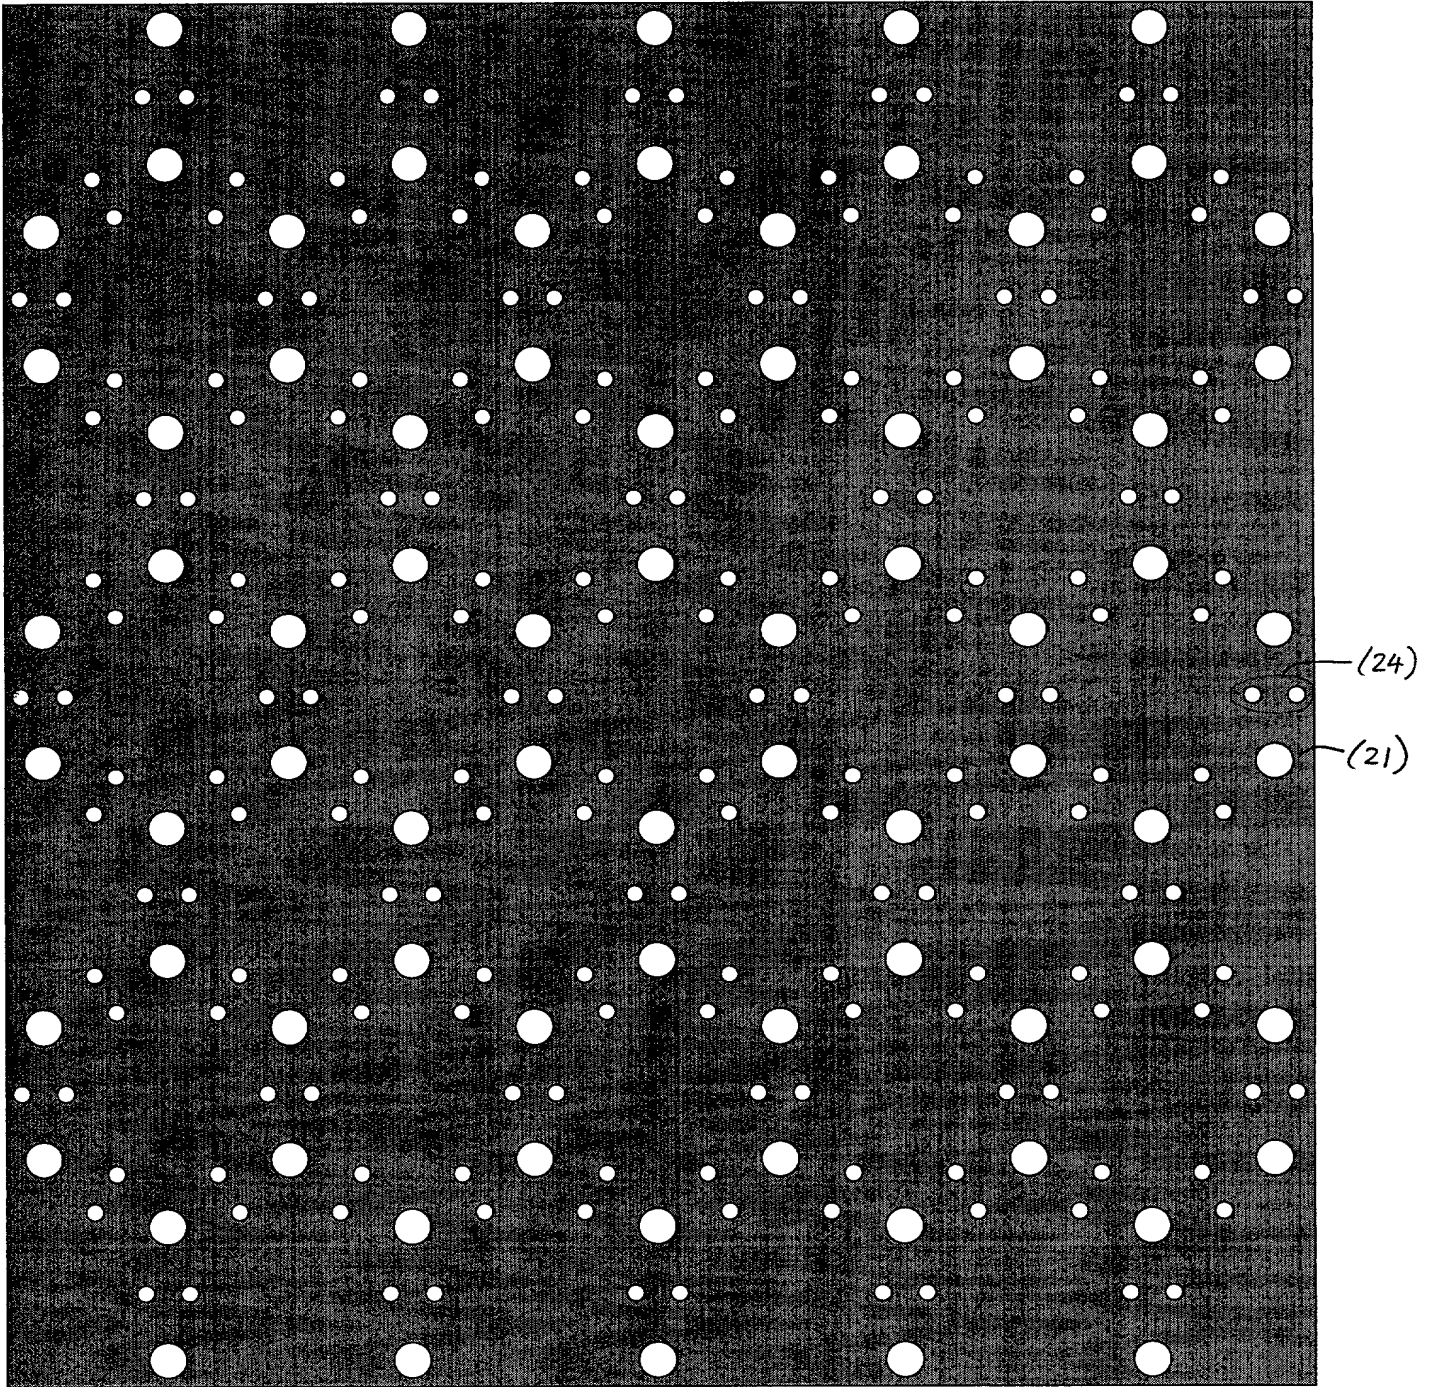


FIG. 19



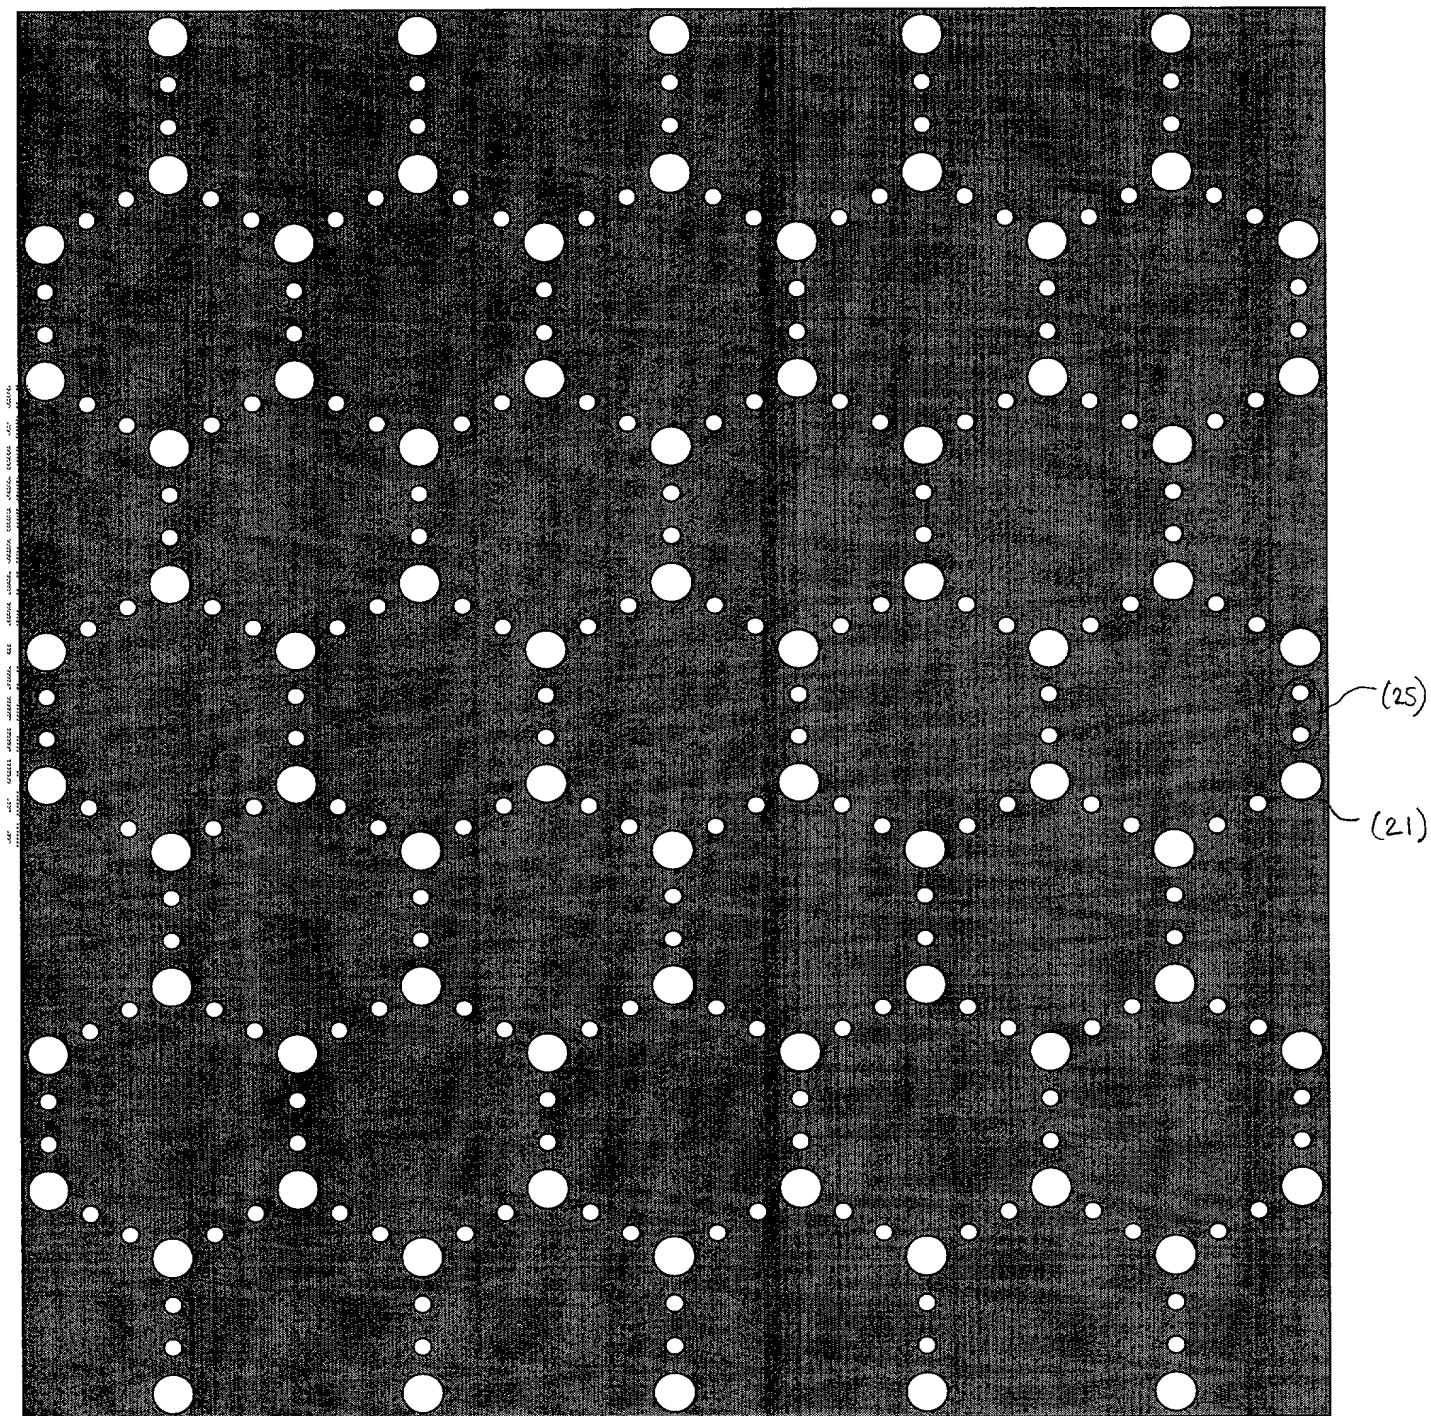


FIG. 20



FIG. 21


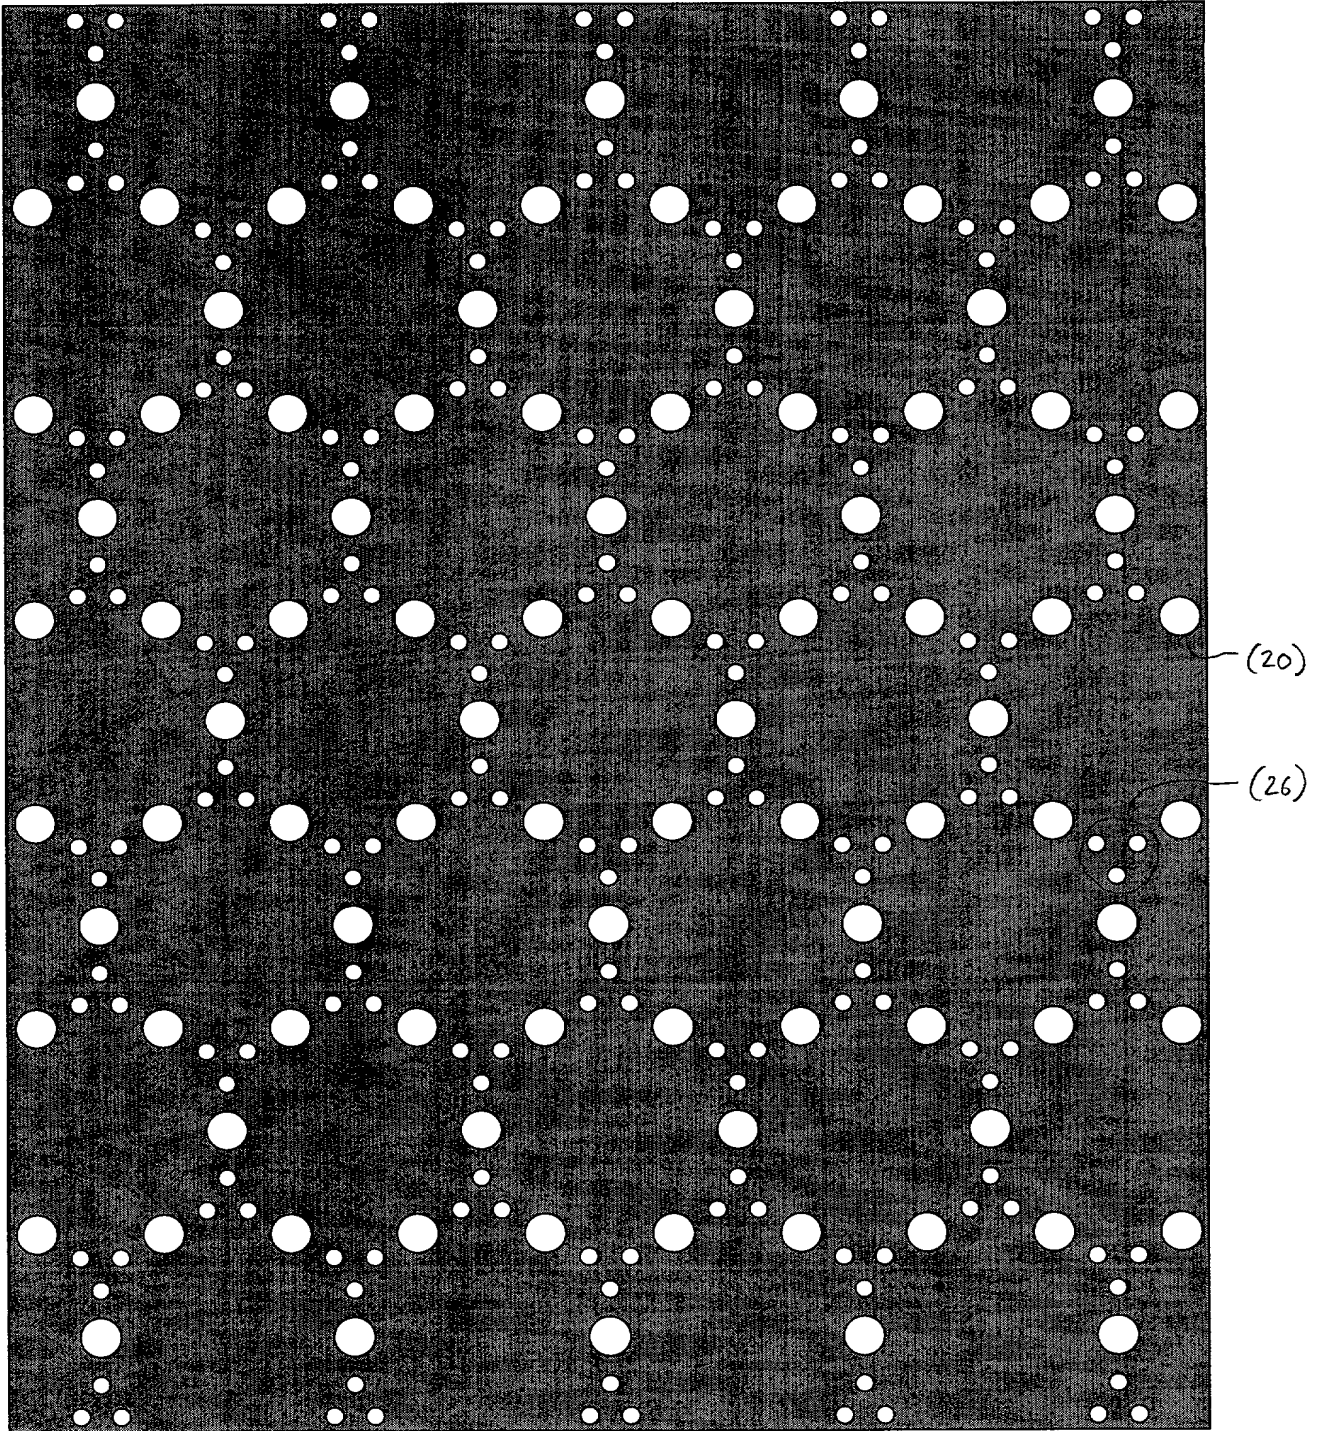


FIG. 21



FIG. 22

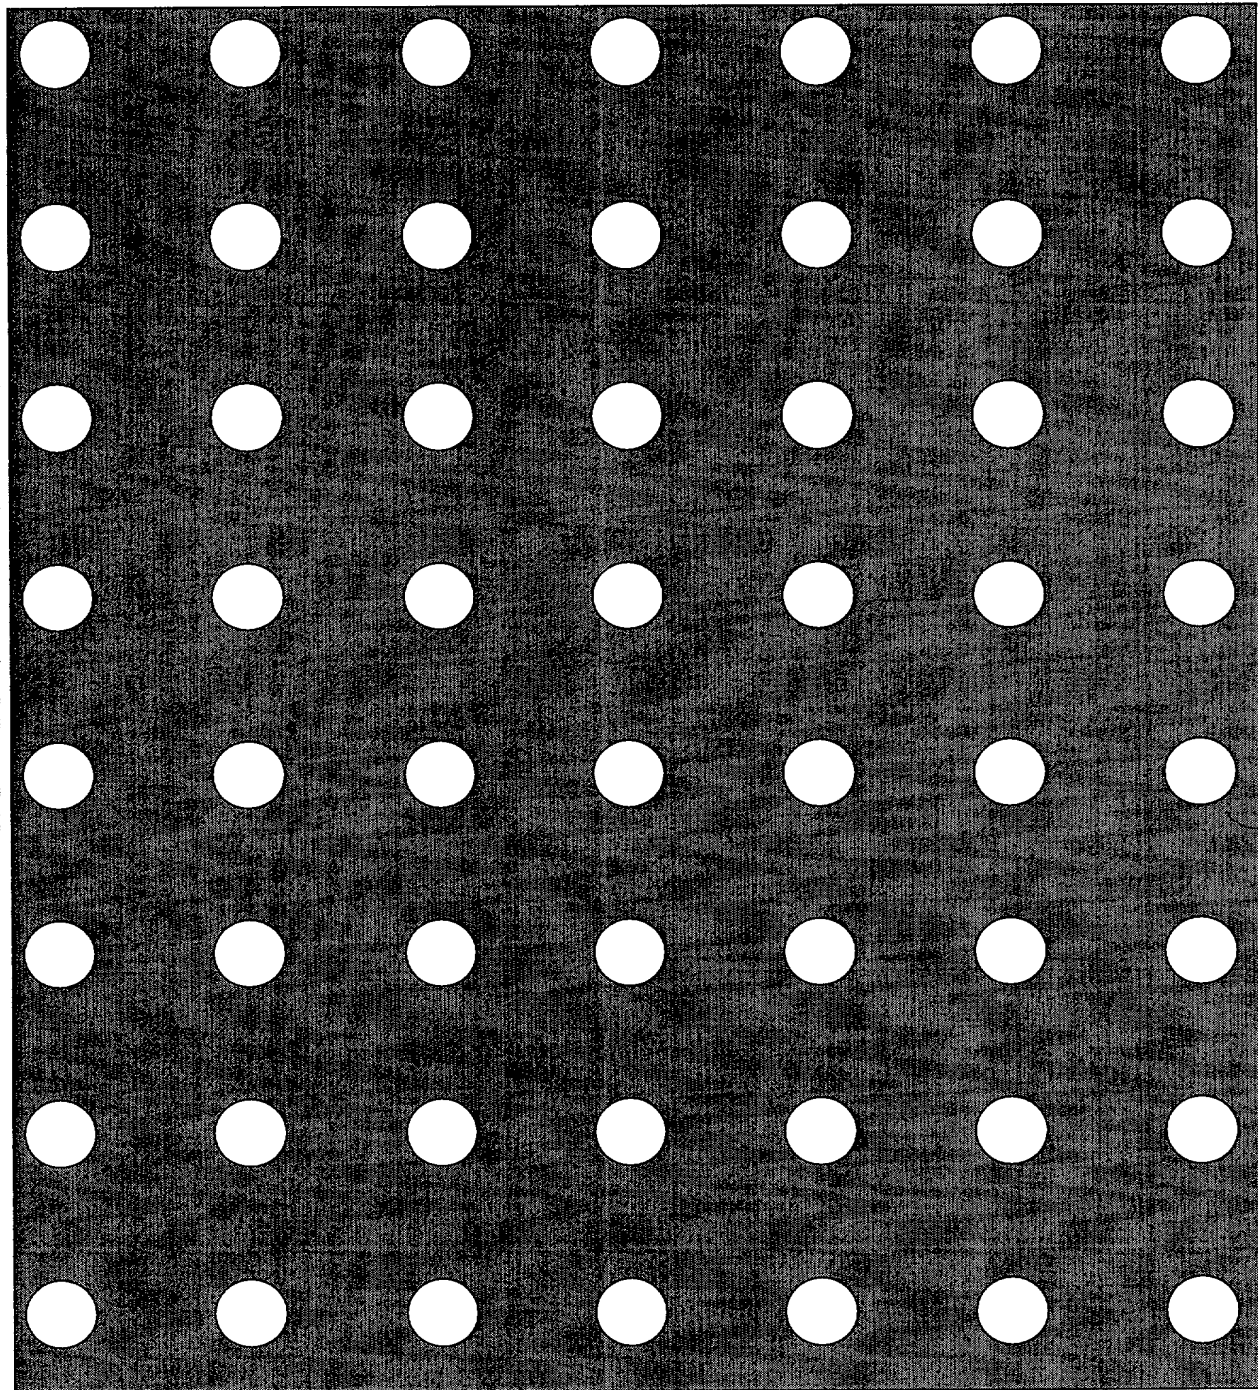

(27)

FIG. 22



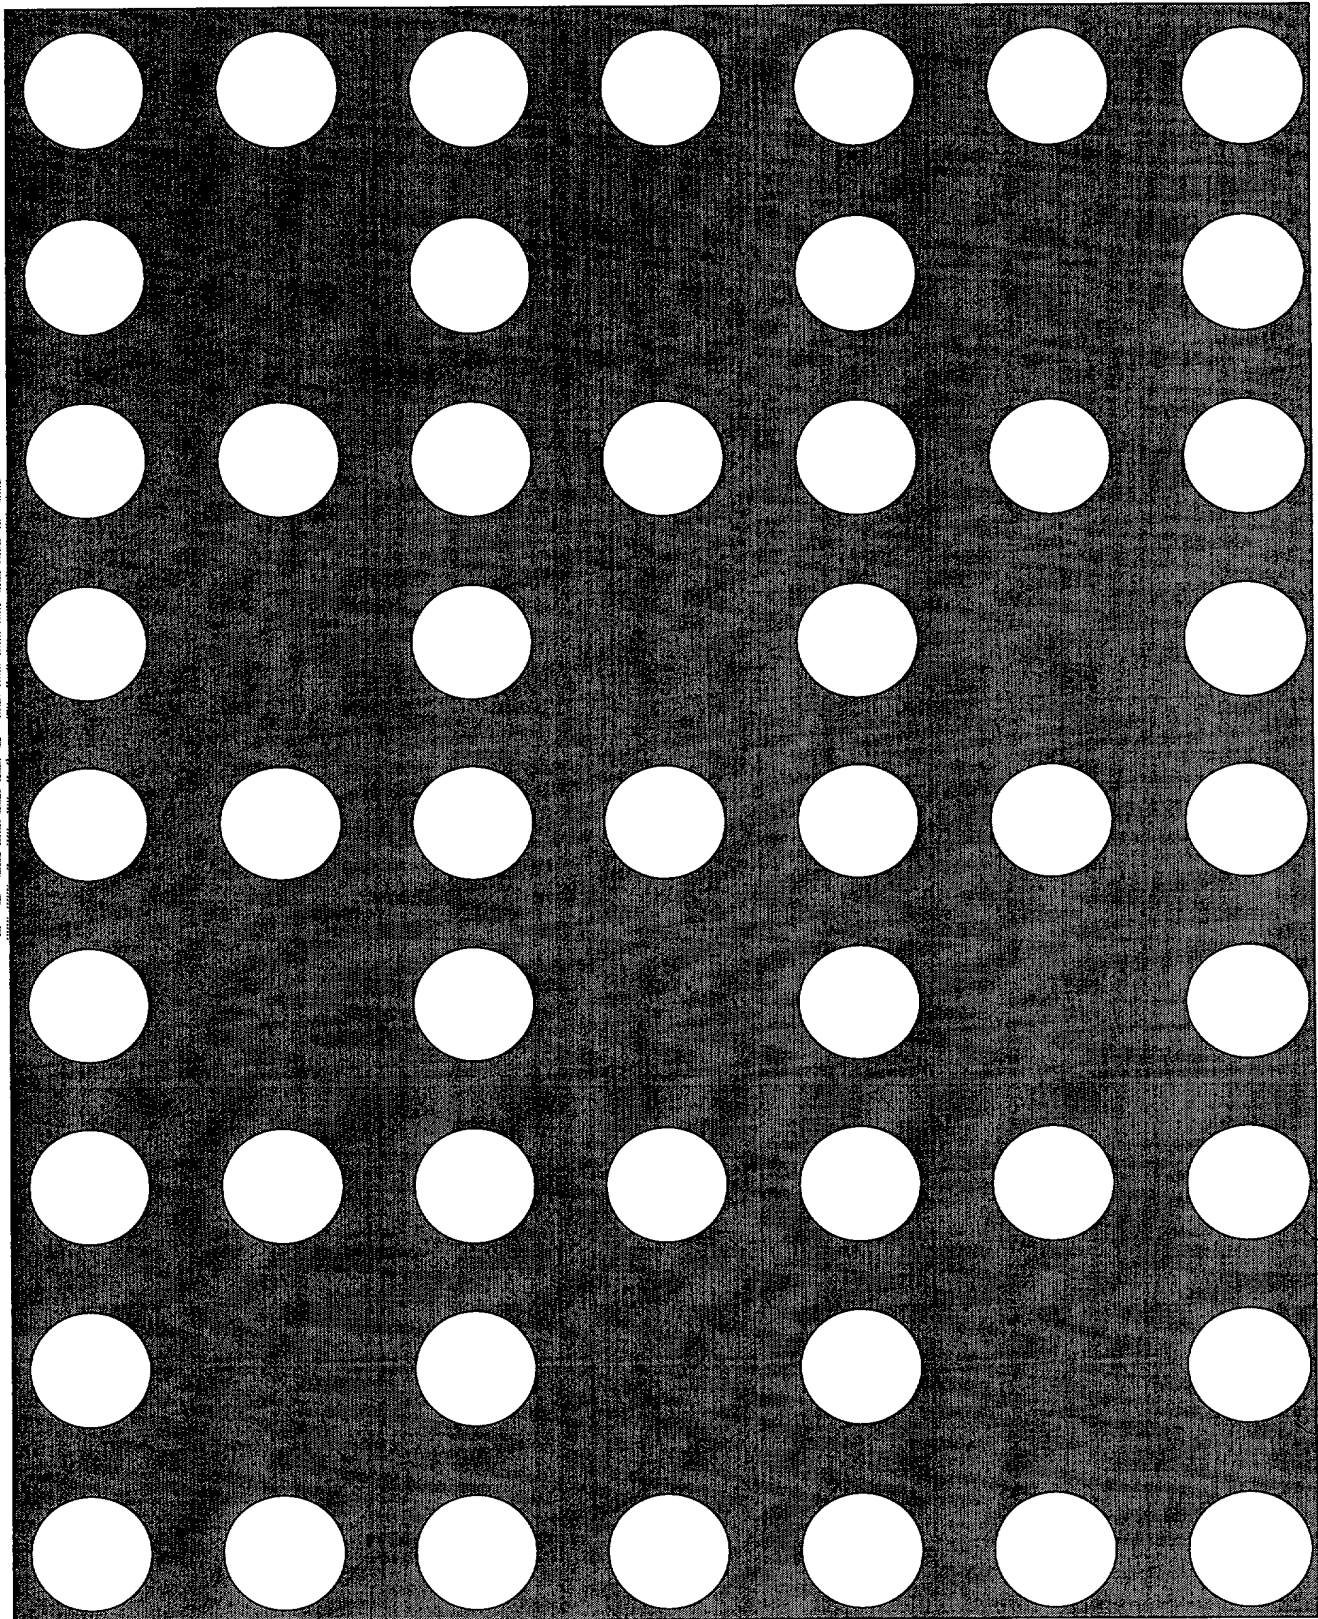


FIG 23



FIG. 24

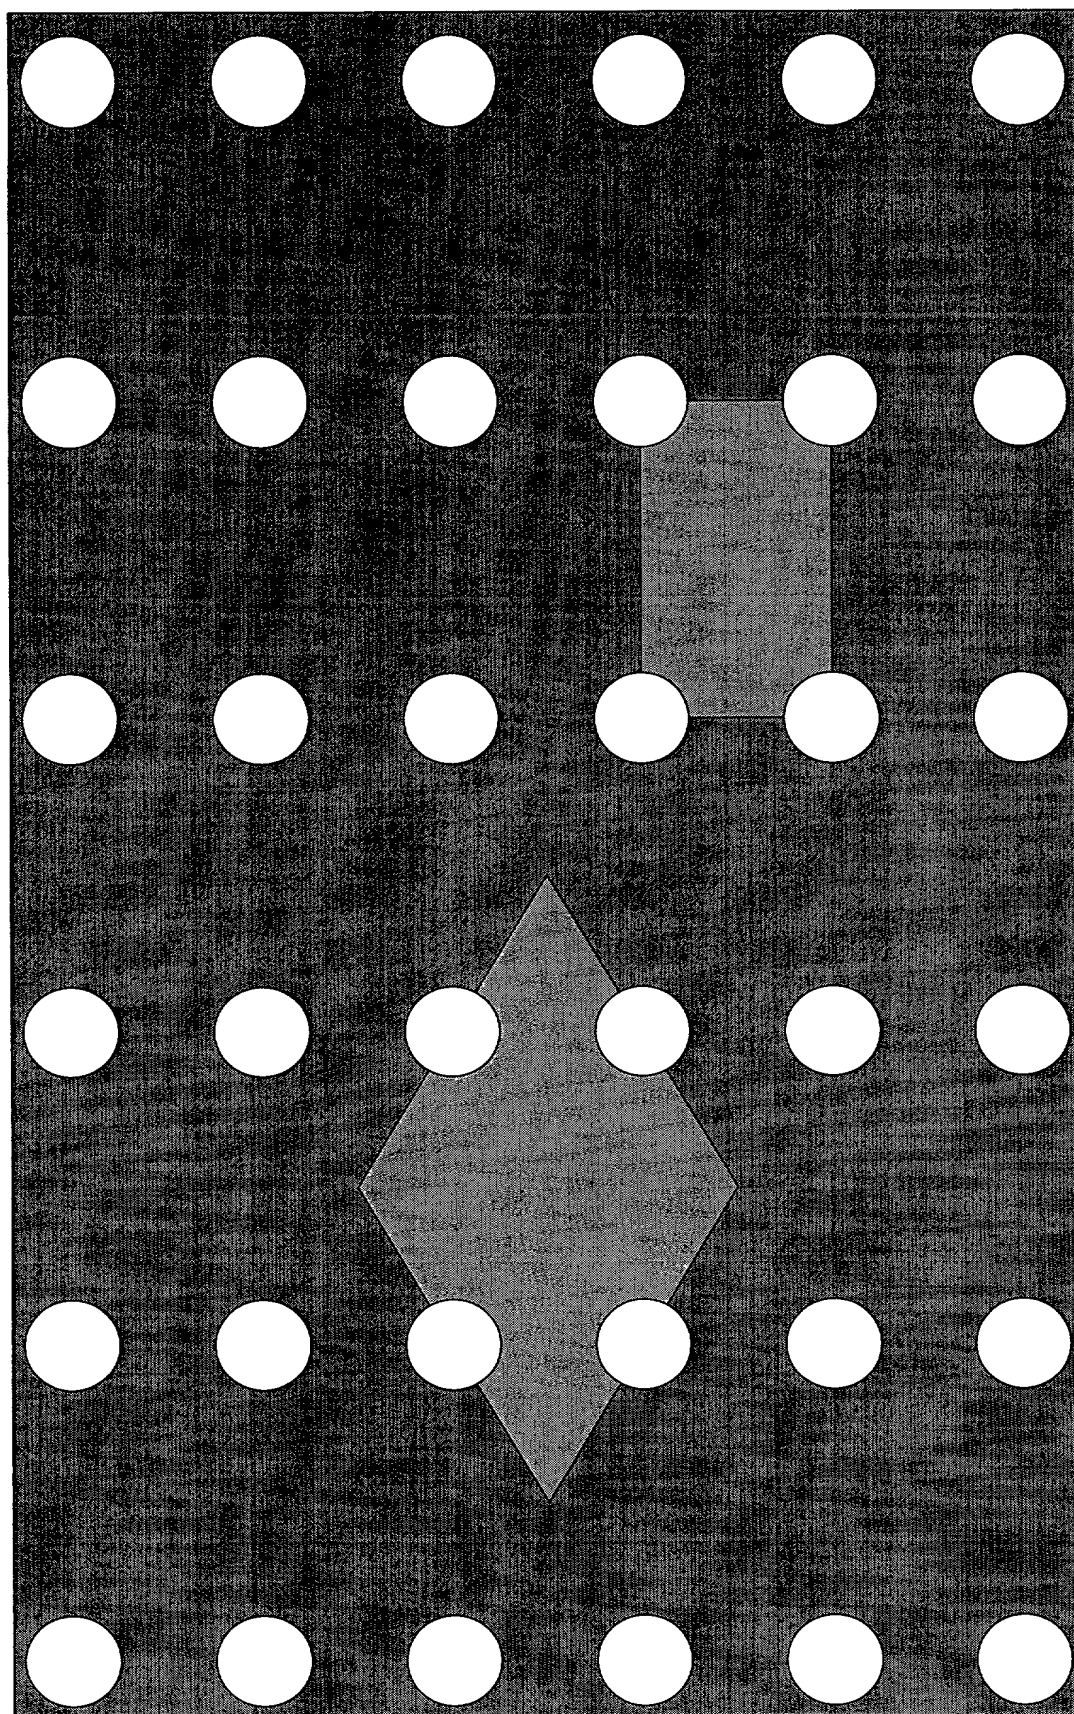


FIG 24



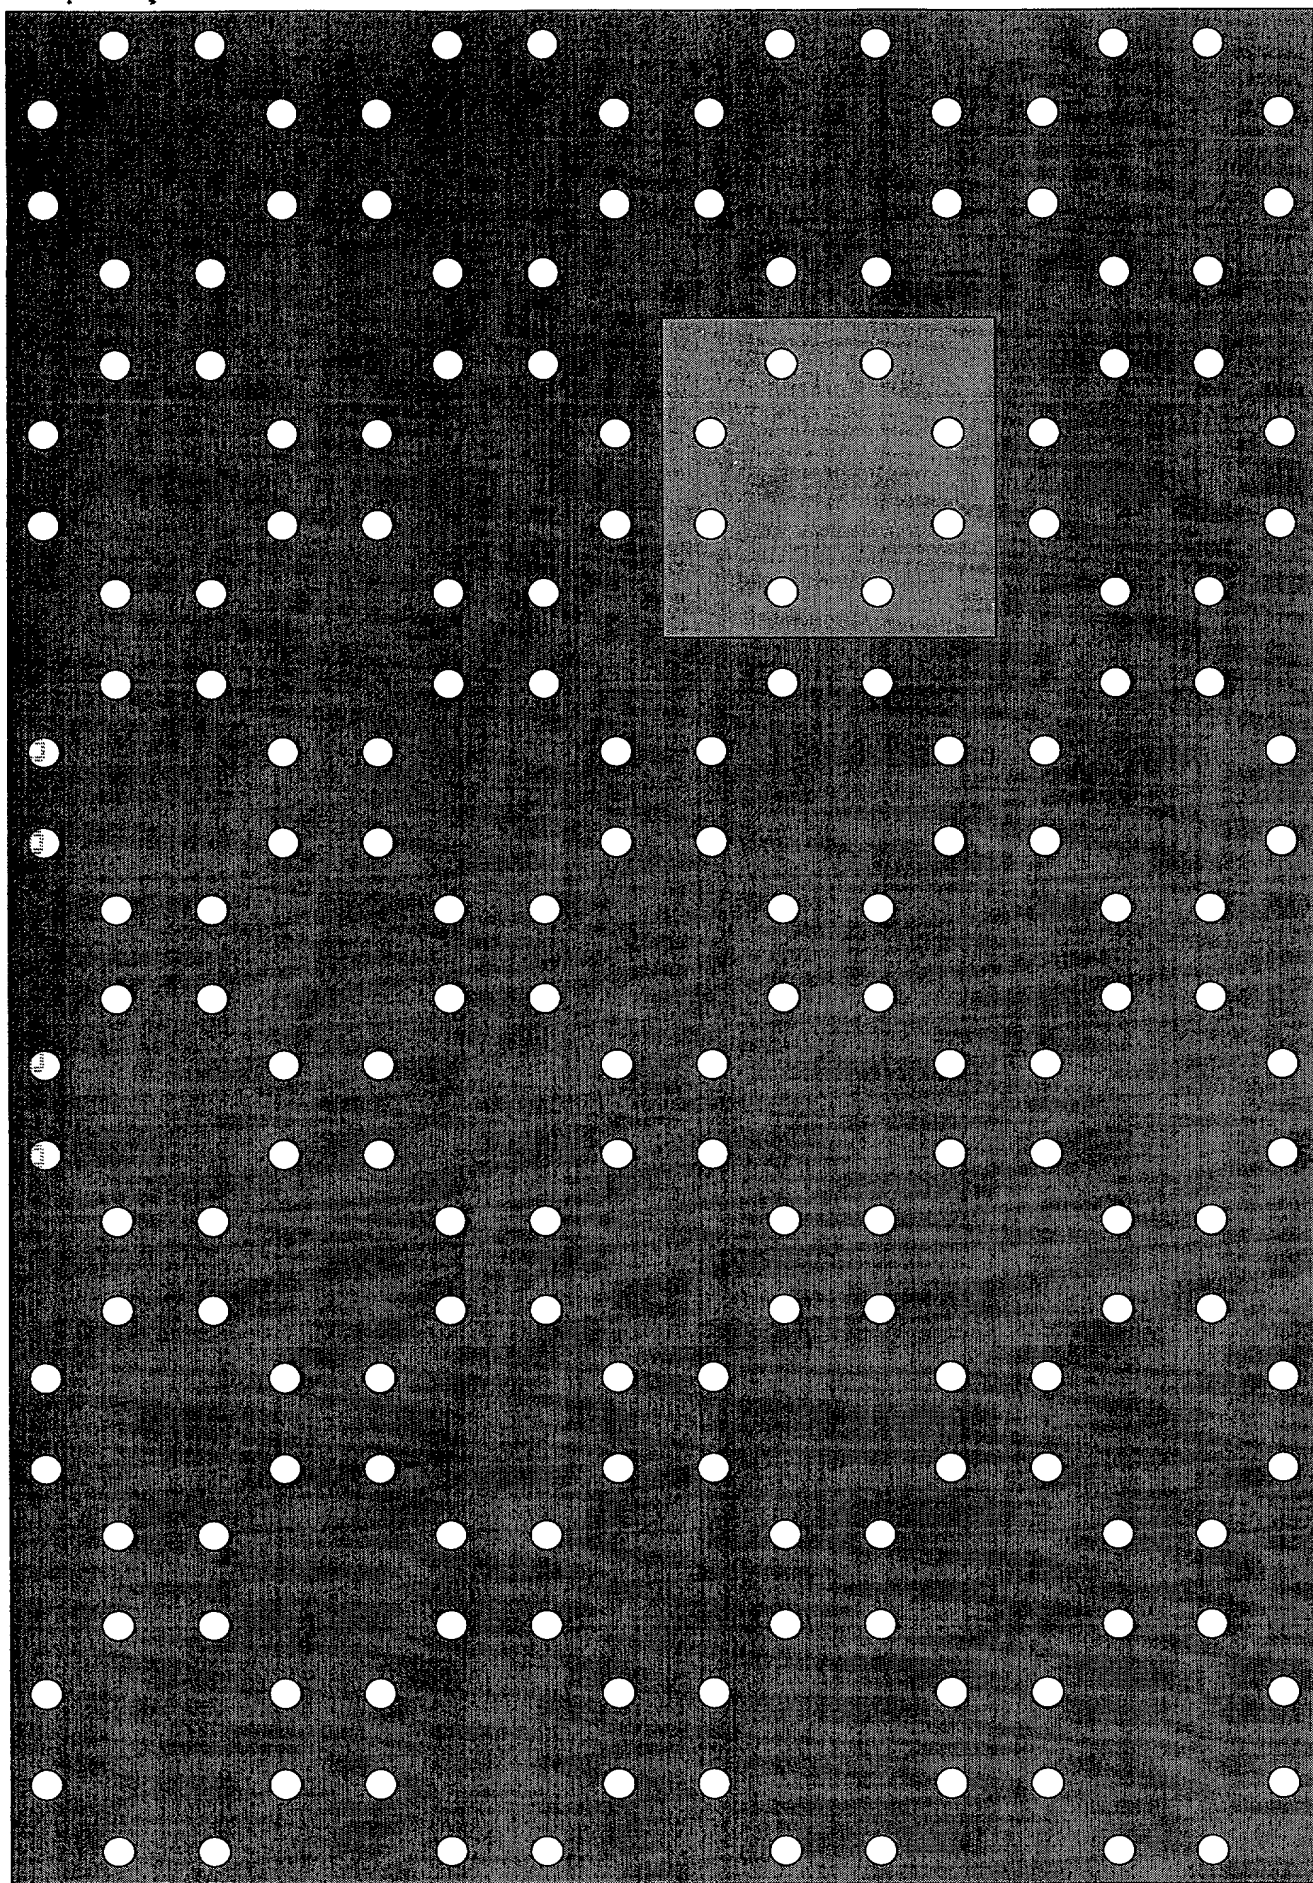


FIG. 25



He is visto ille  
60° gradas symmetrie

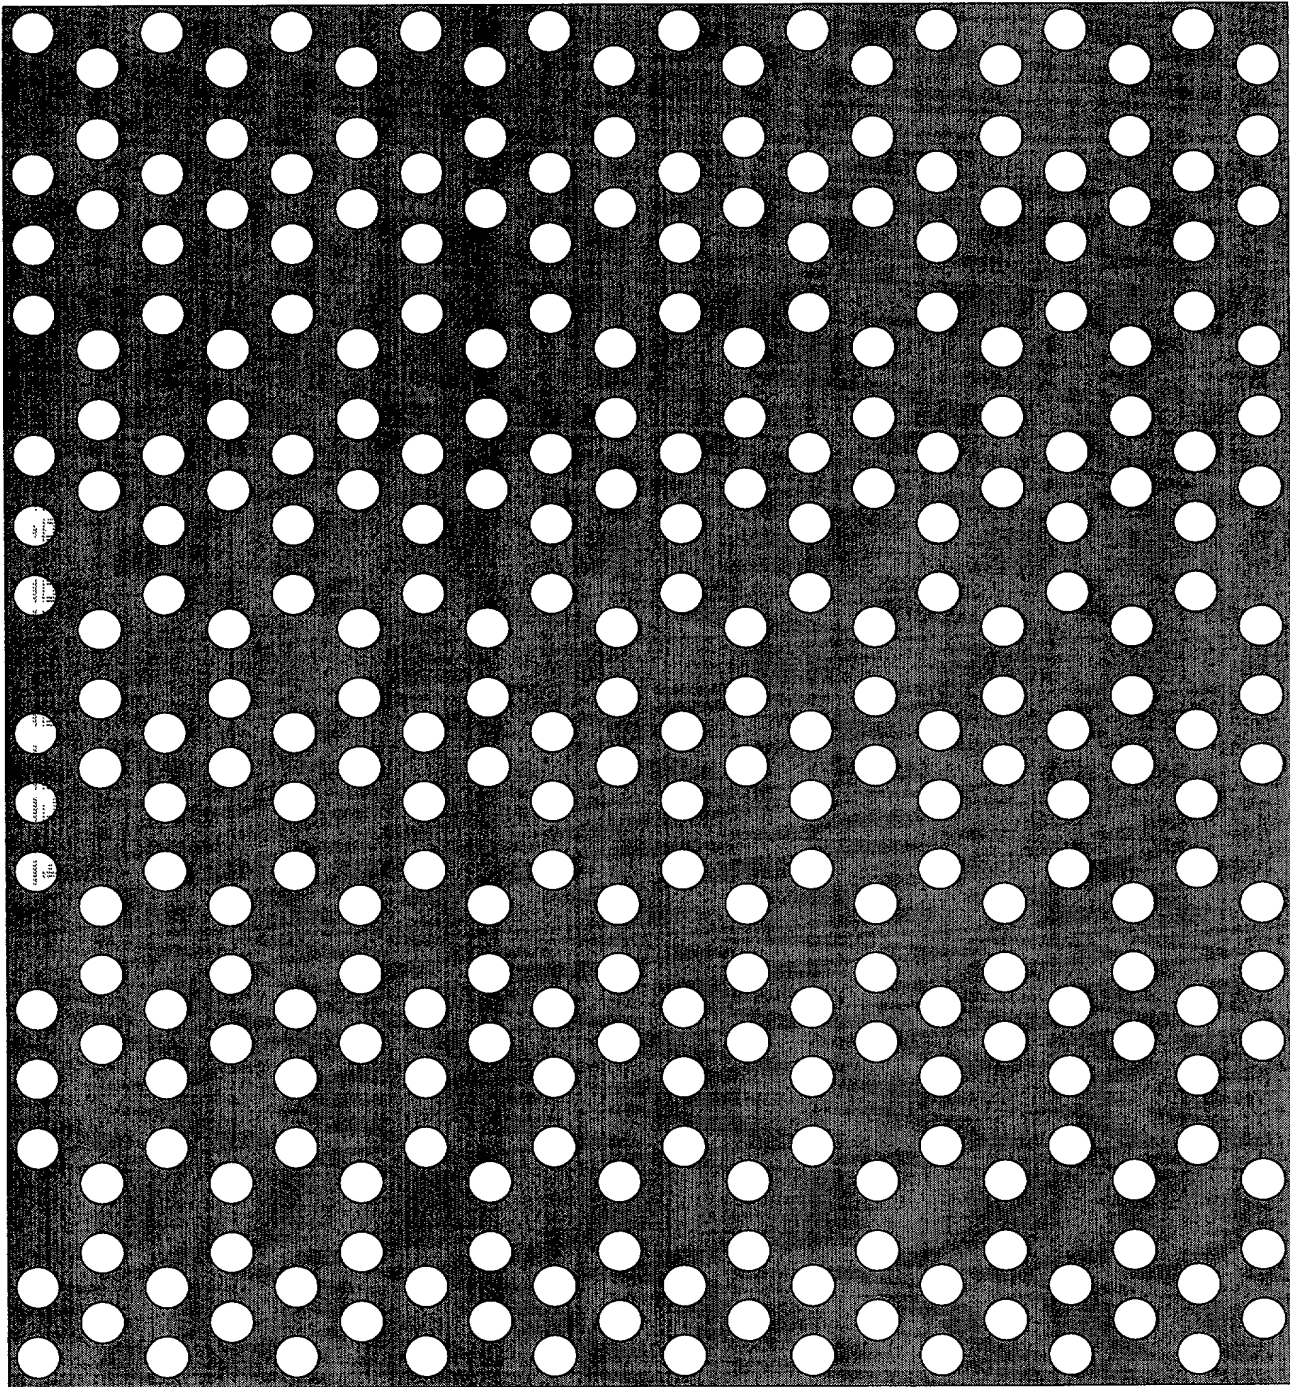


FIG. 26



Er dette periodisk?

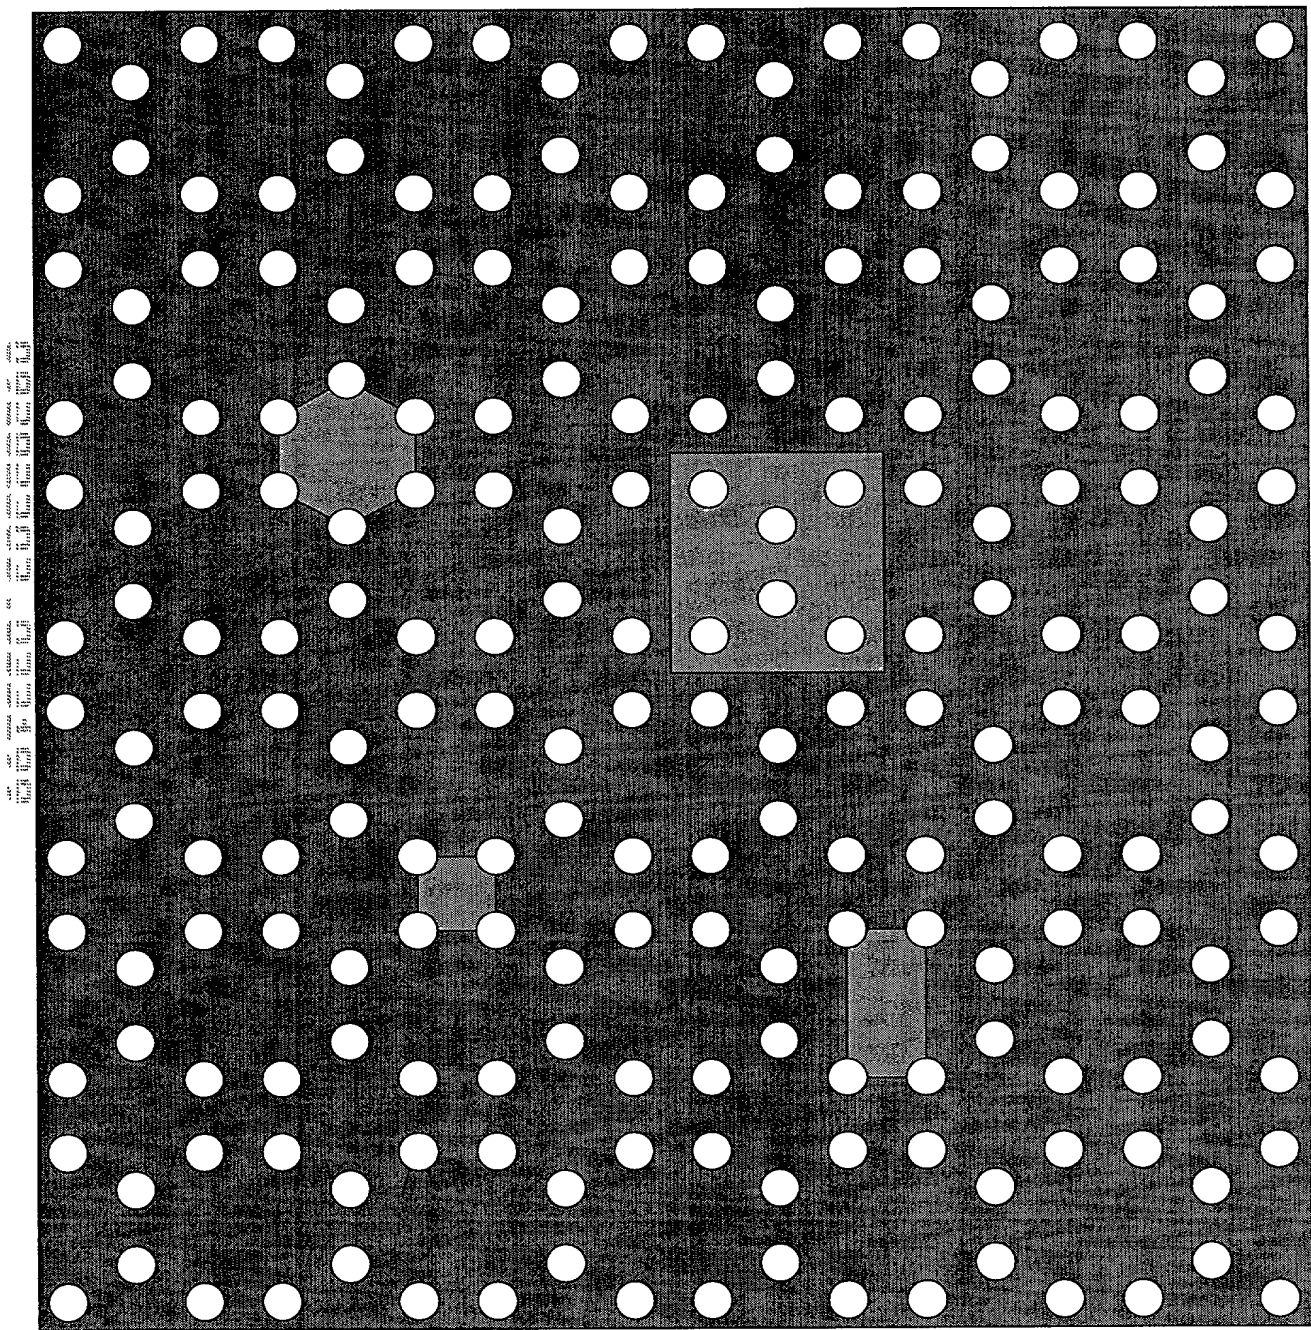


FIG. 27



FIG. 28 is a perspective view of a rectangular plate 30 having a grid of circular holes 31. The plate 30 is shown in a perspective view, and the grid of holes 31 is arranged in a regular pattern. The plate 30 is shown in a perspective view, and the grid of holes 31 is arranged in a regular pattern.

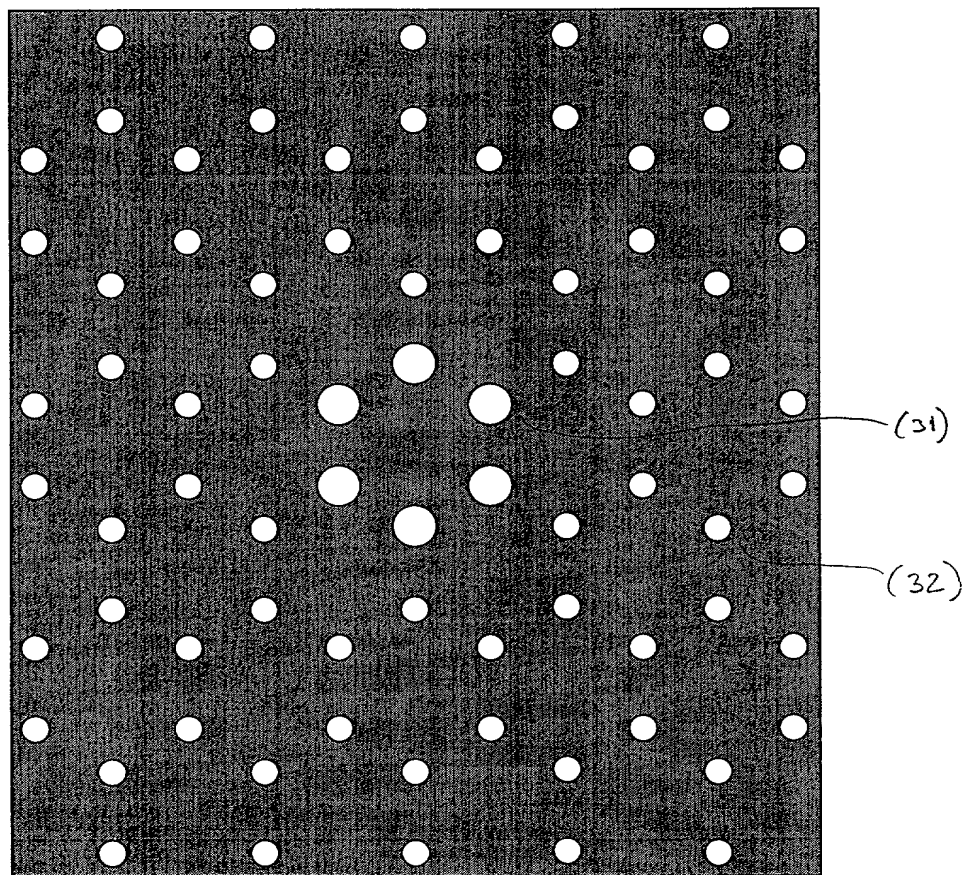


FIG 28



FIG. 29 is a perspective view of a grid of circular openings in a material, showing the grid pattern and the openings.

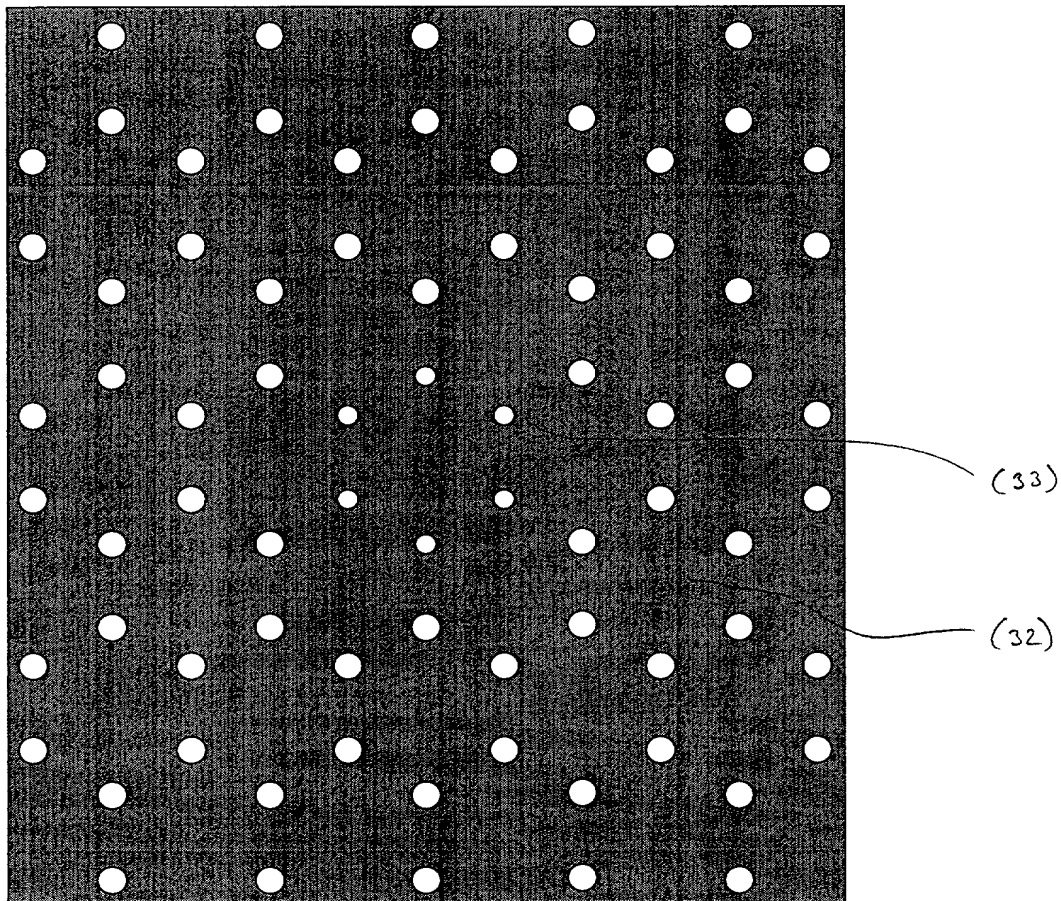


FIG. 29



FIG. 30

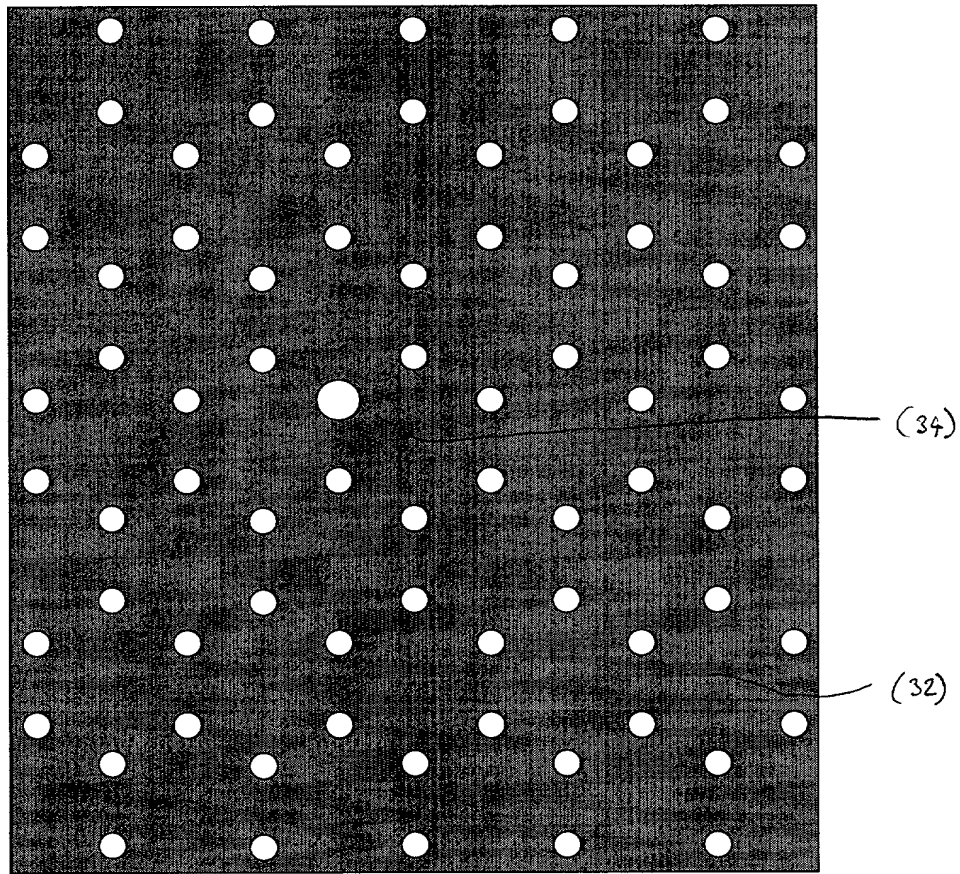


FIG. 30



FIG. 31

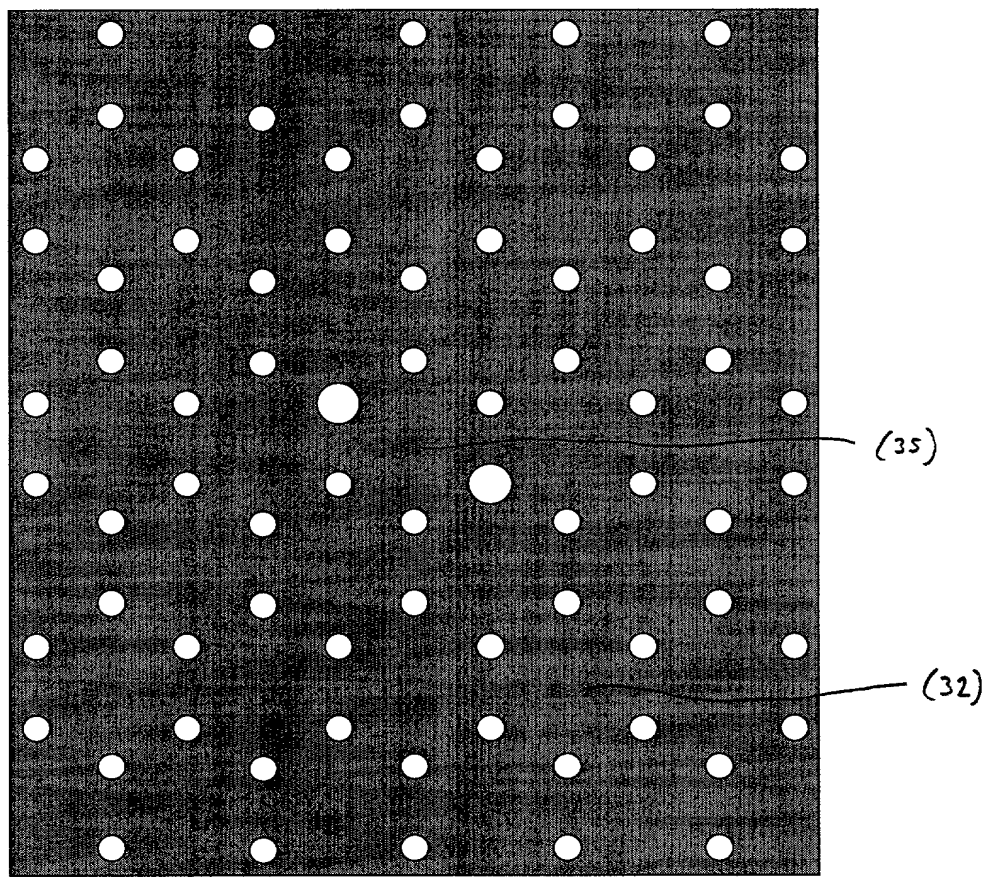


FIG. 31



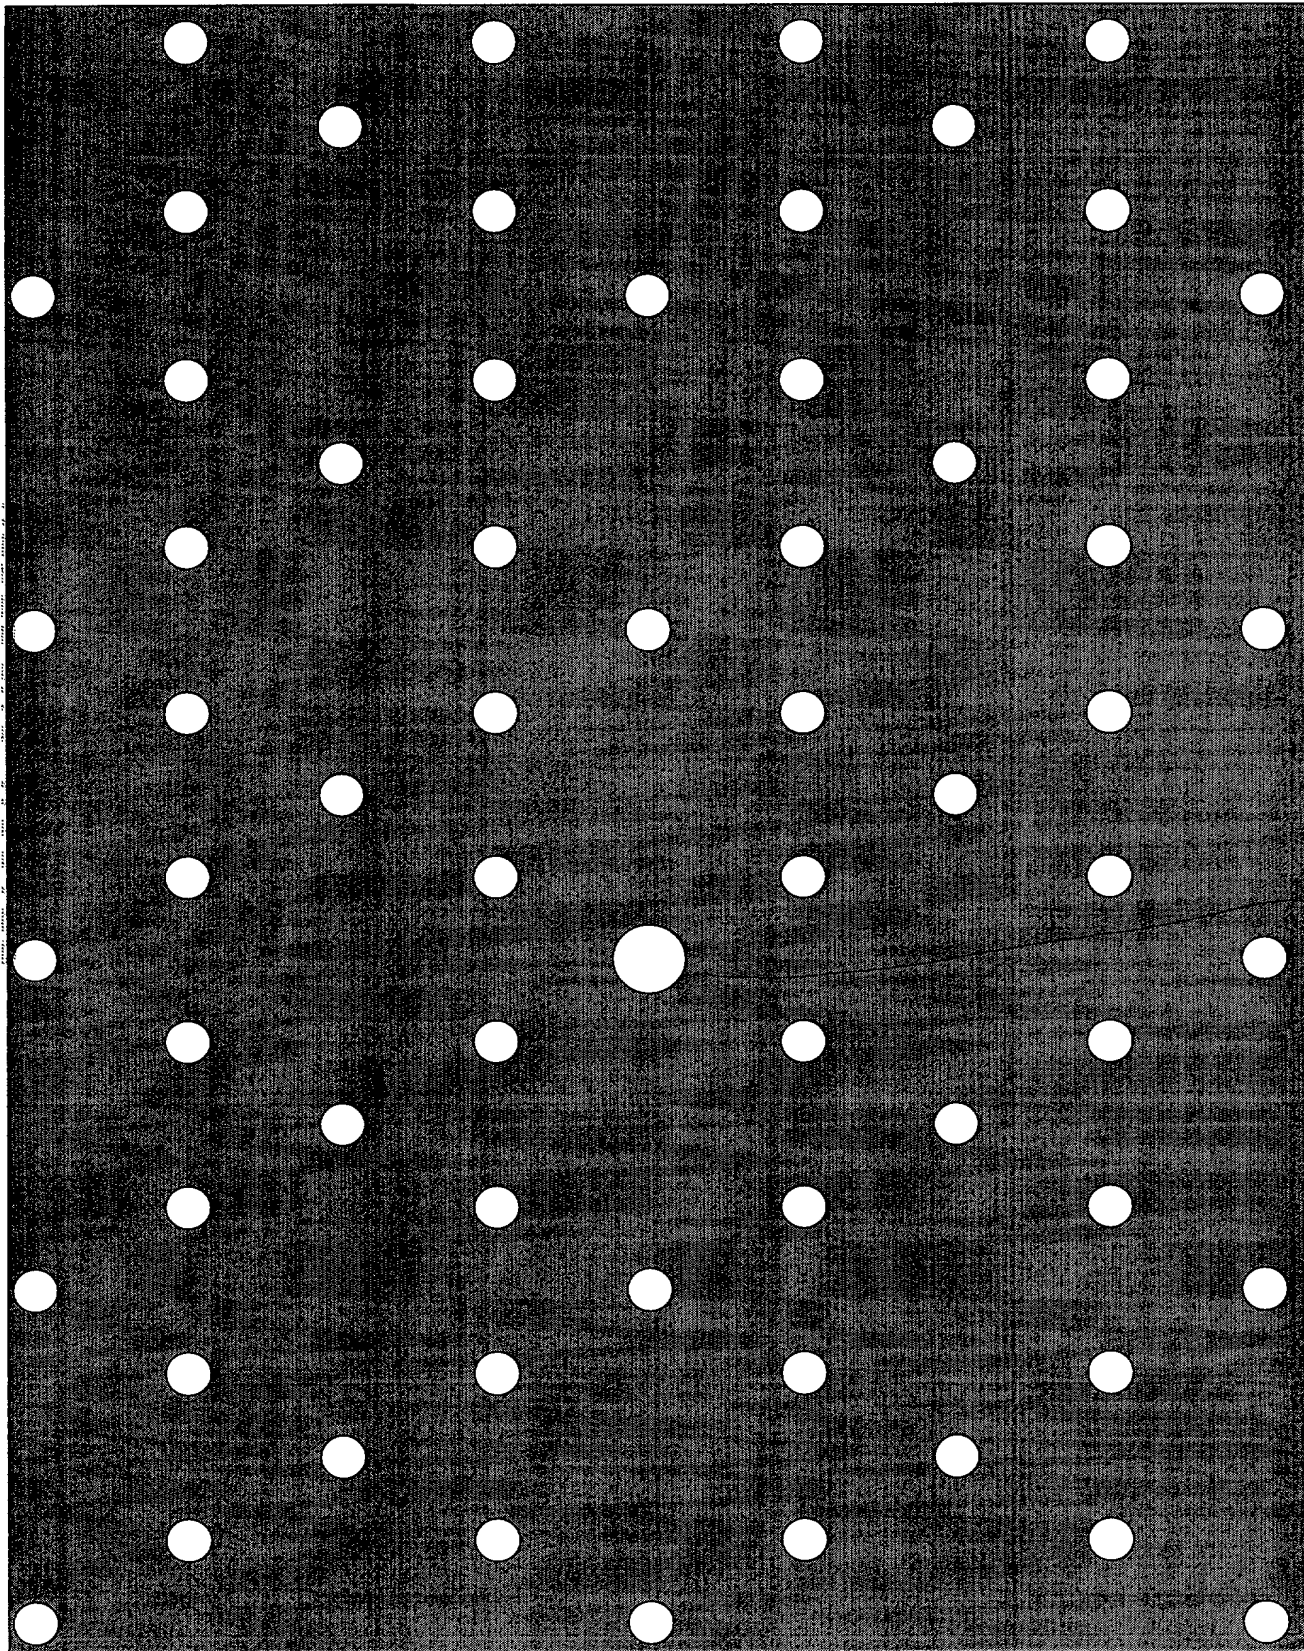


FIG. 32



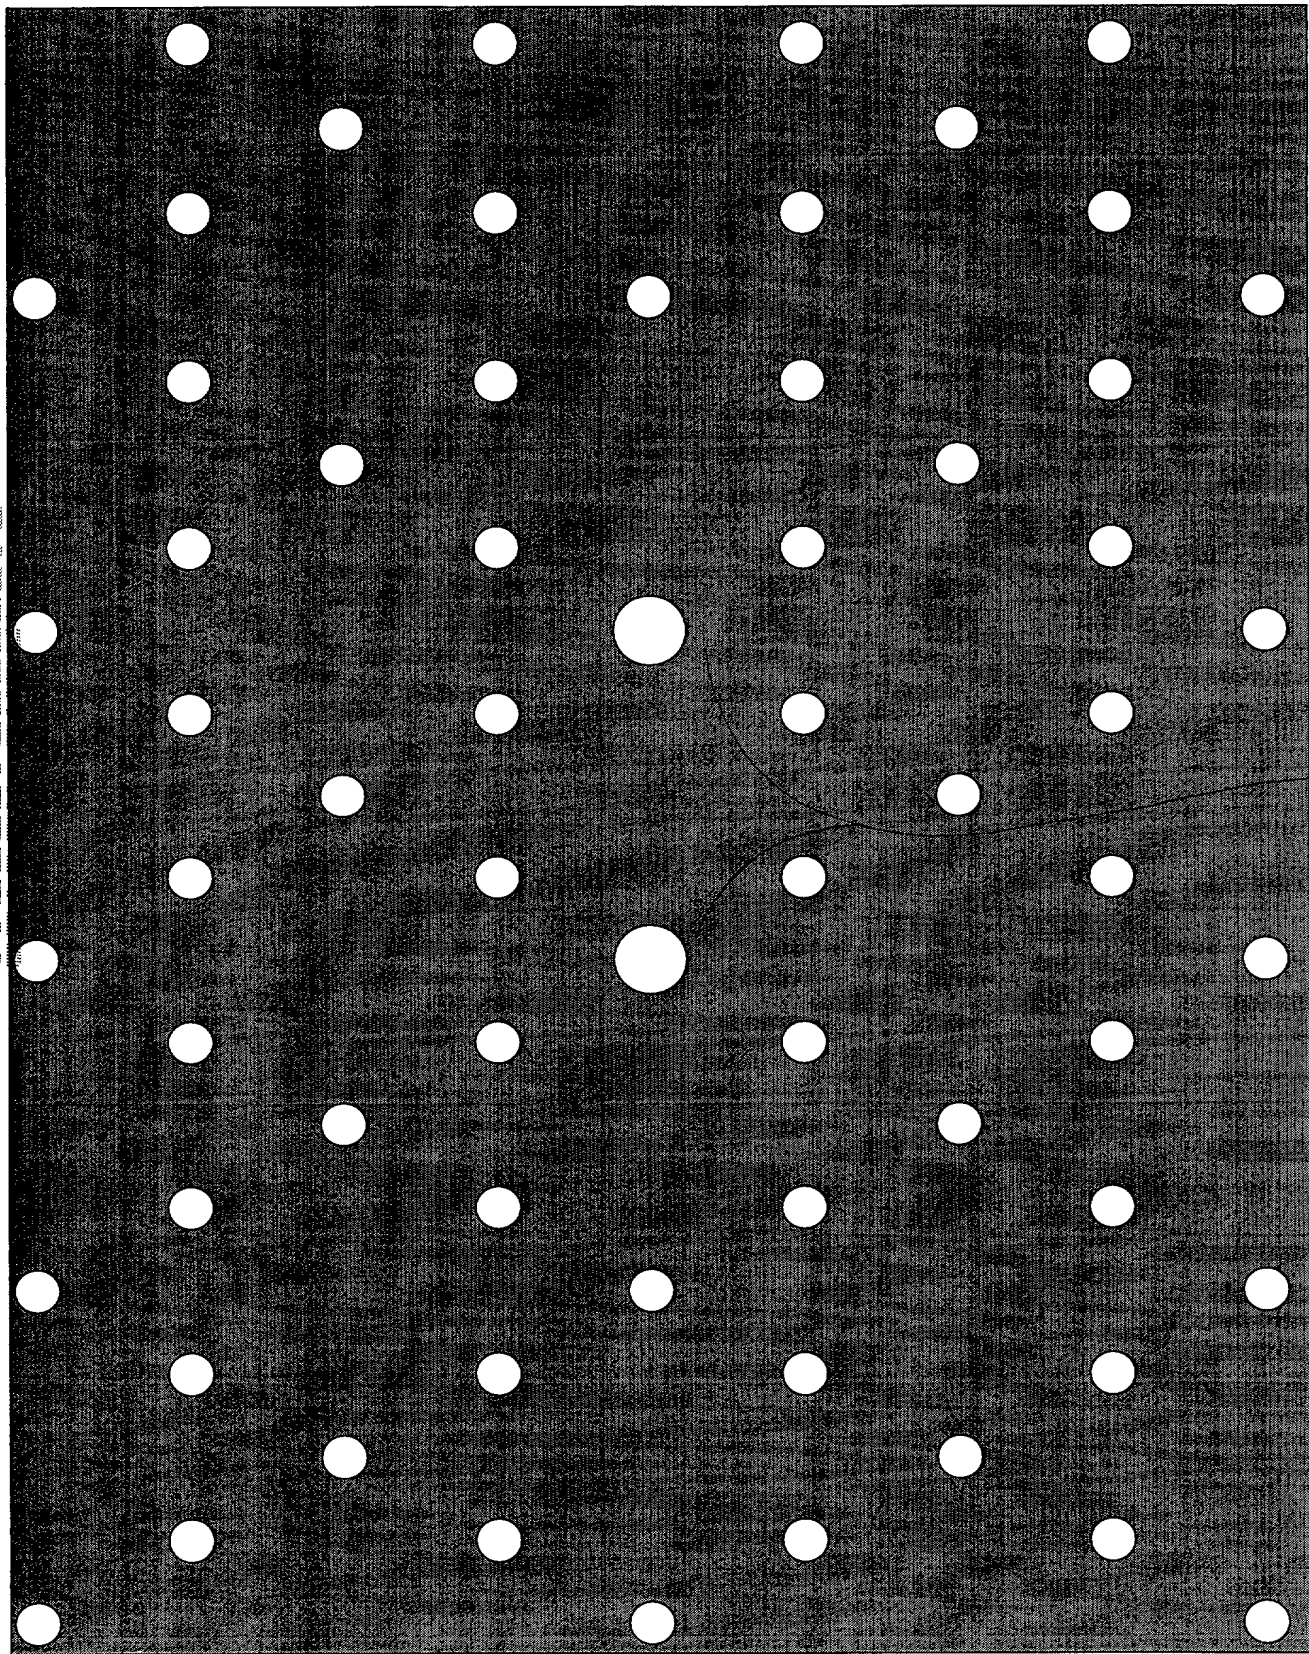


FIG. 33



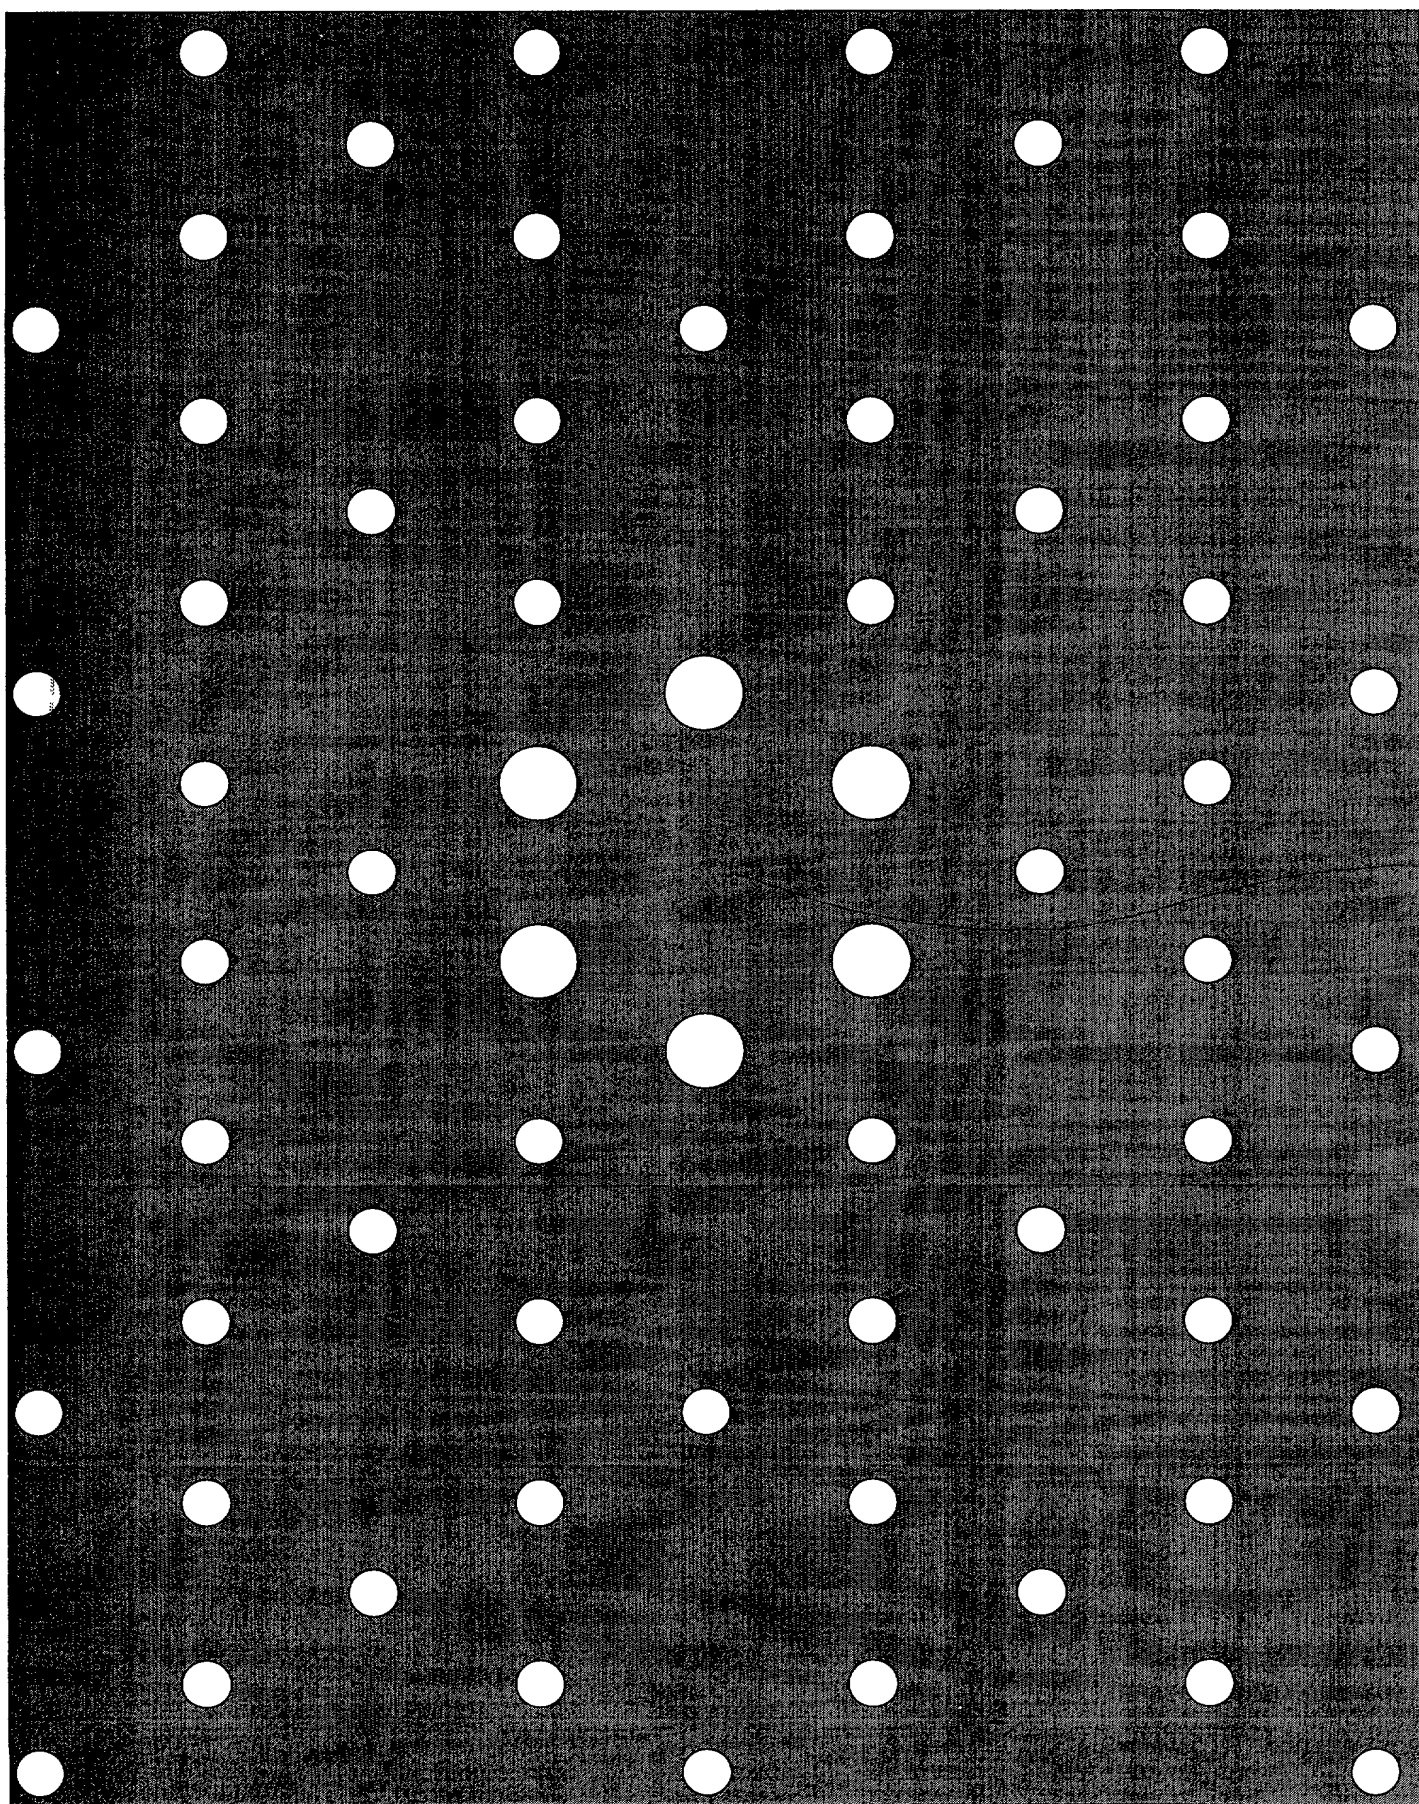


FIG. 34



TIR

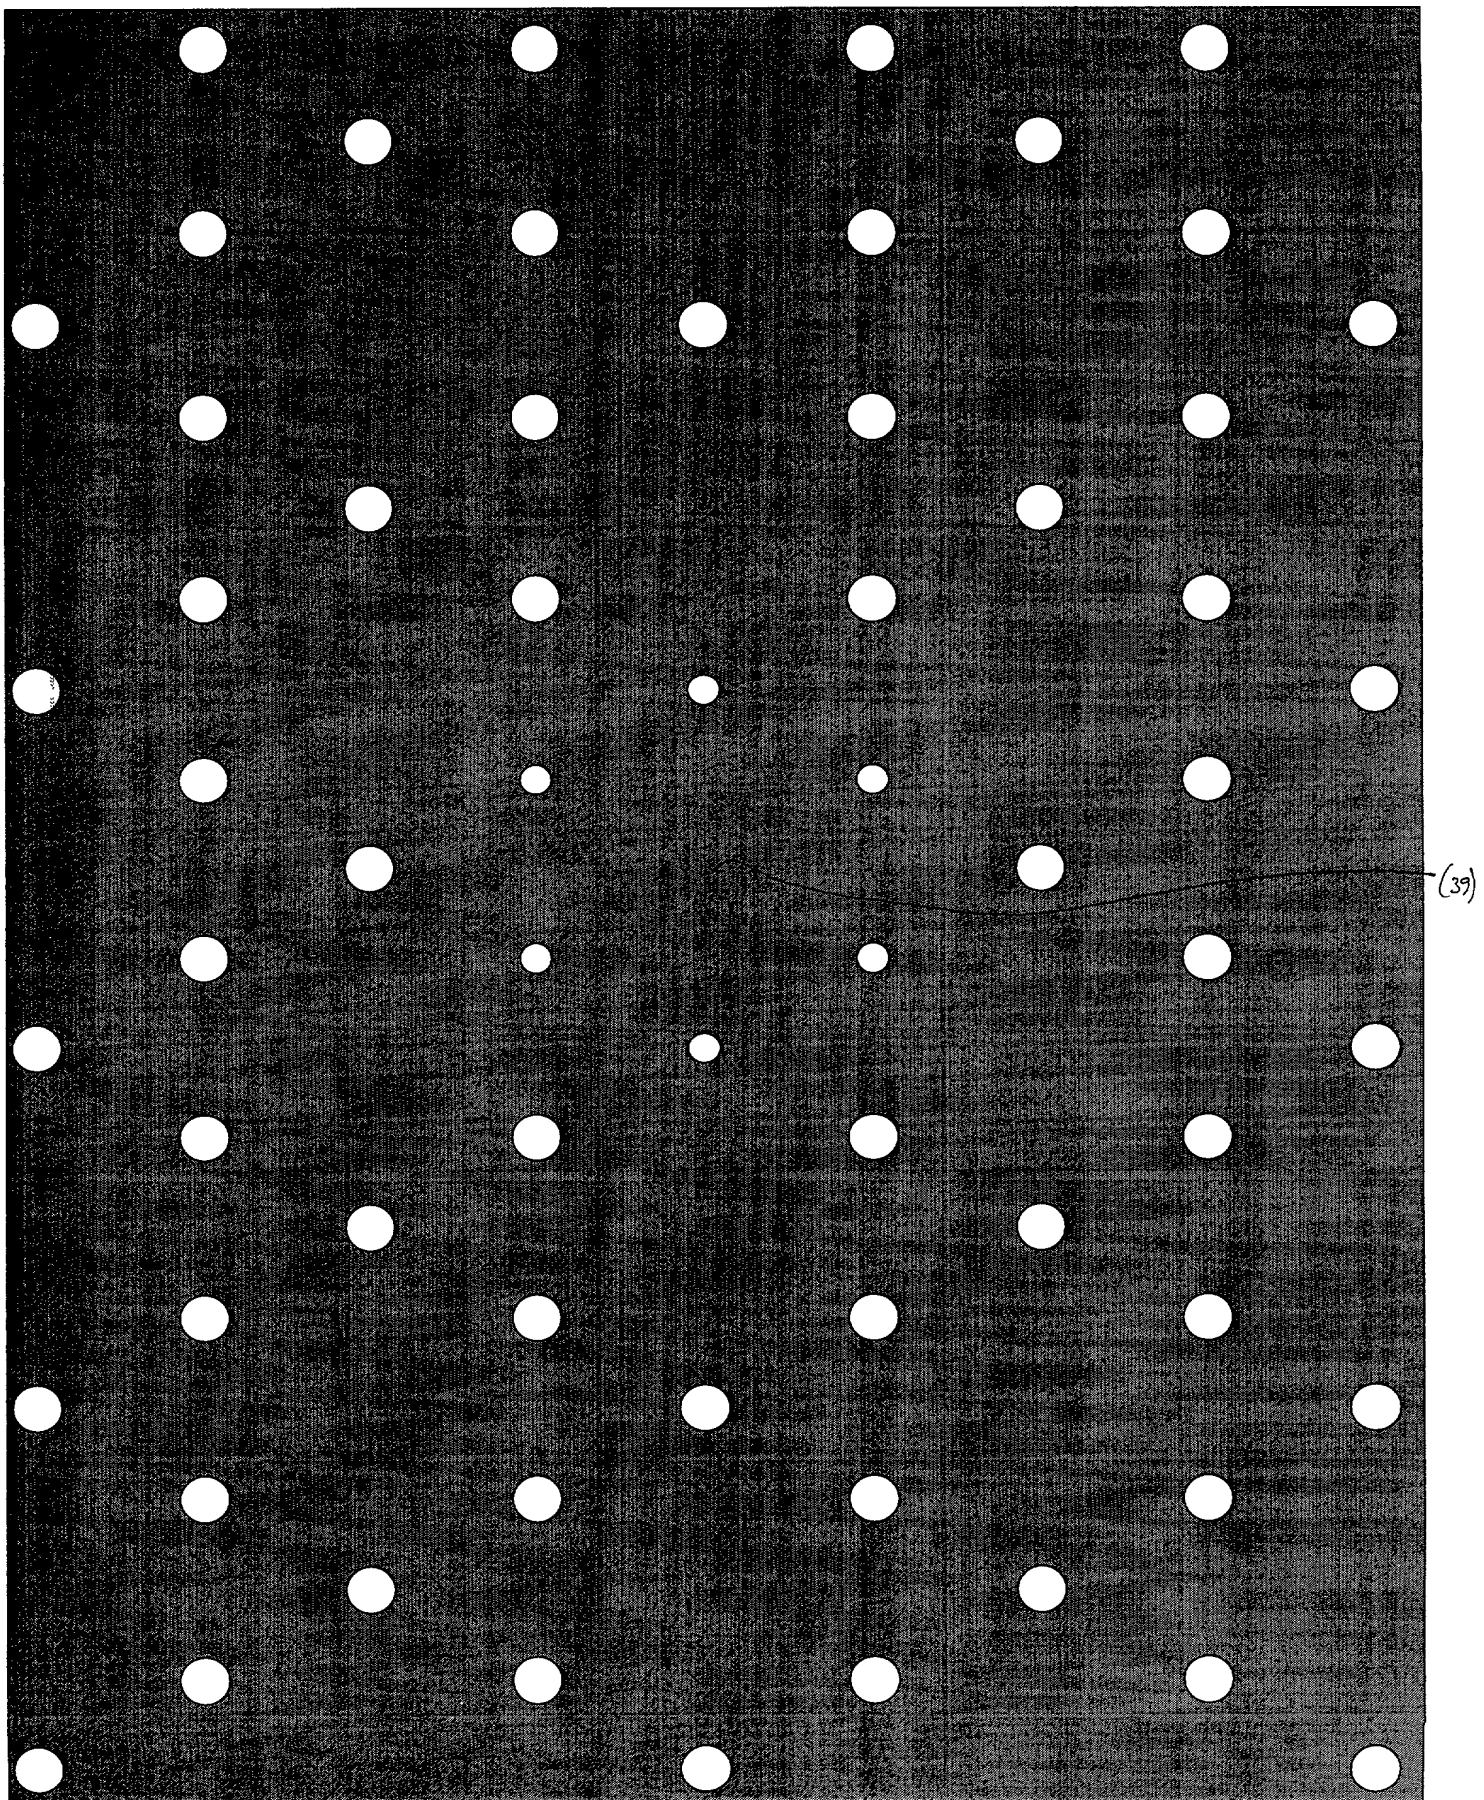


FIG. 35



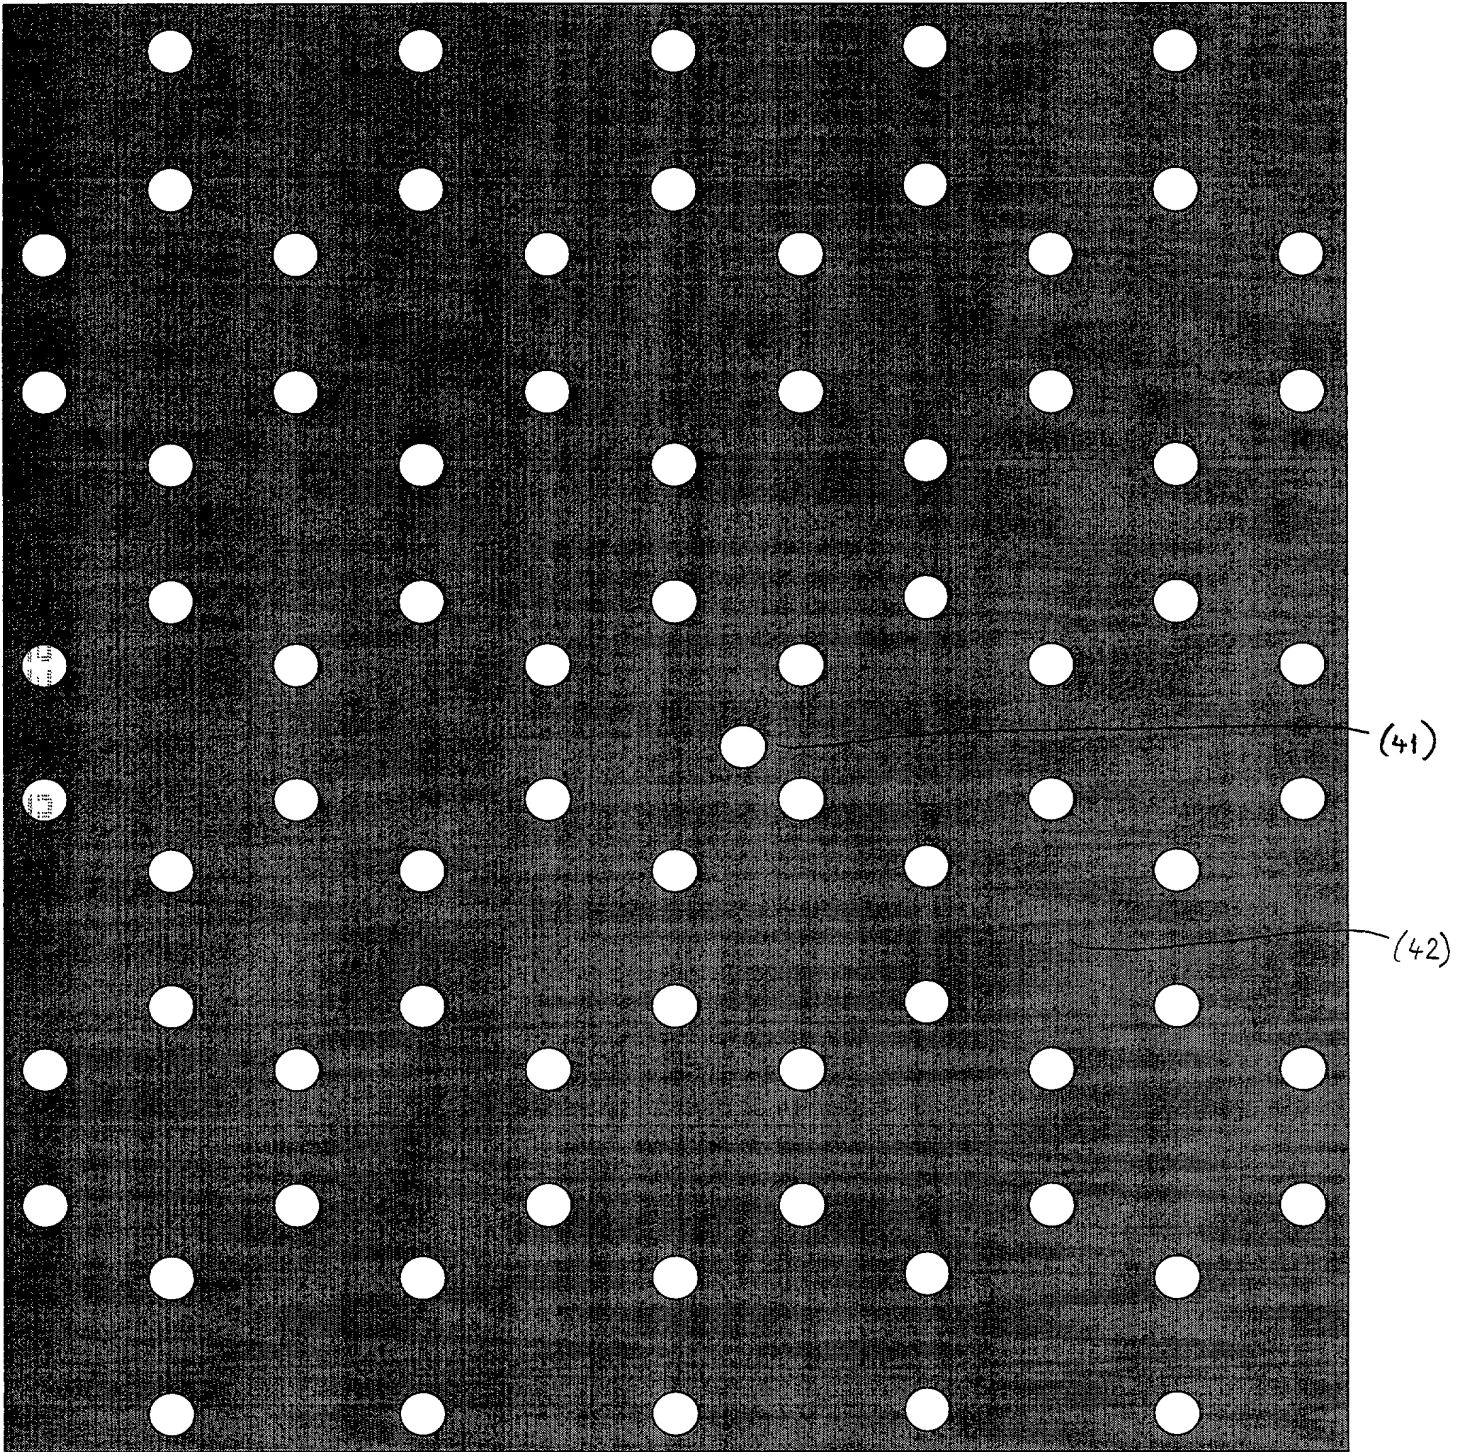


FIG. 36



FIG. 32

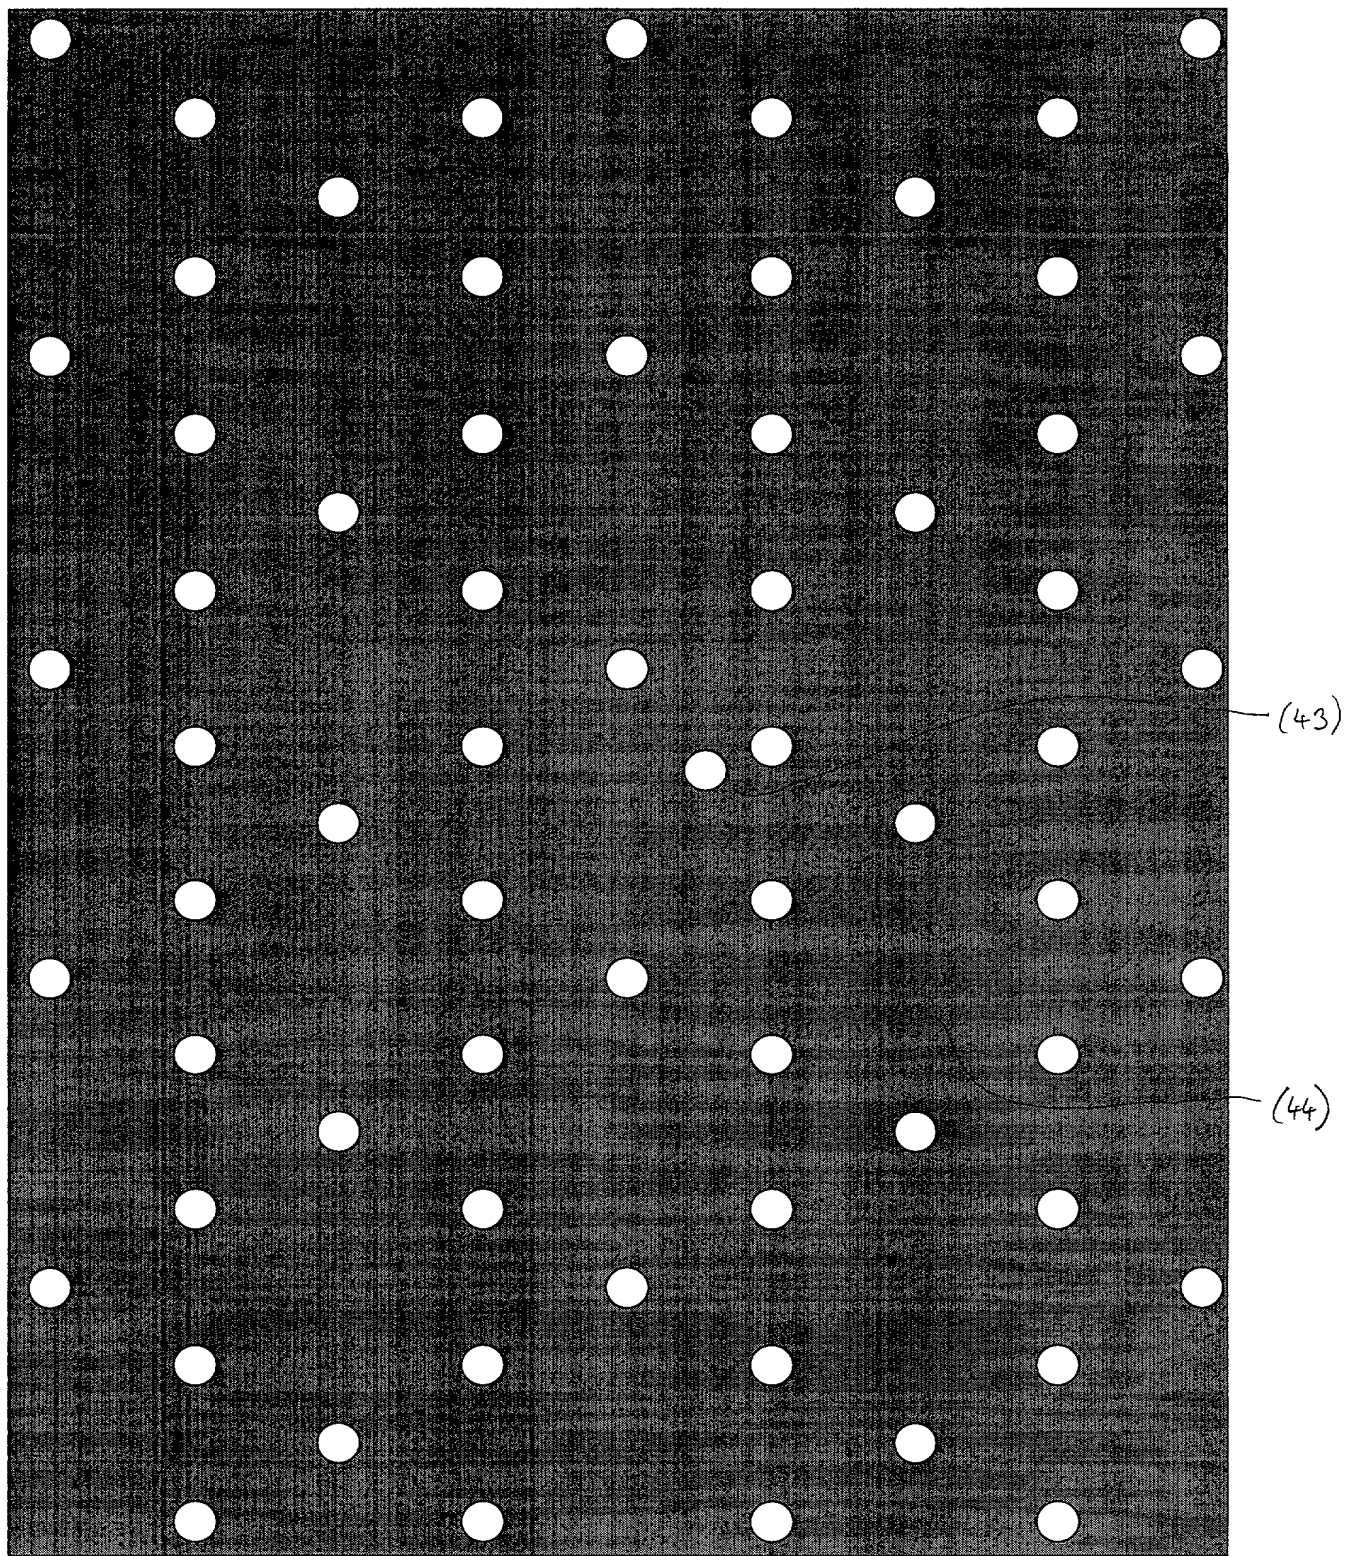


FIG. 32



FIG. 38

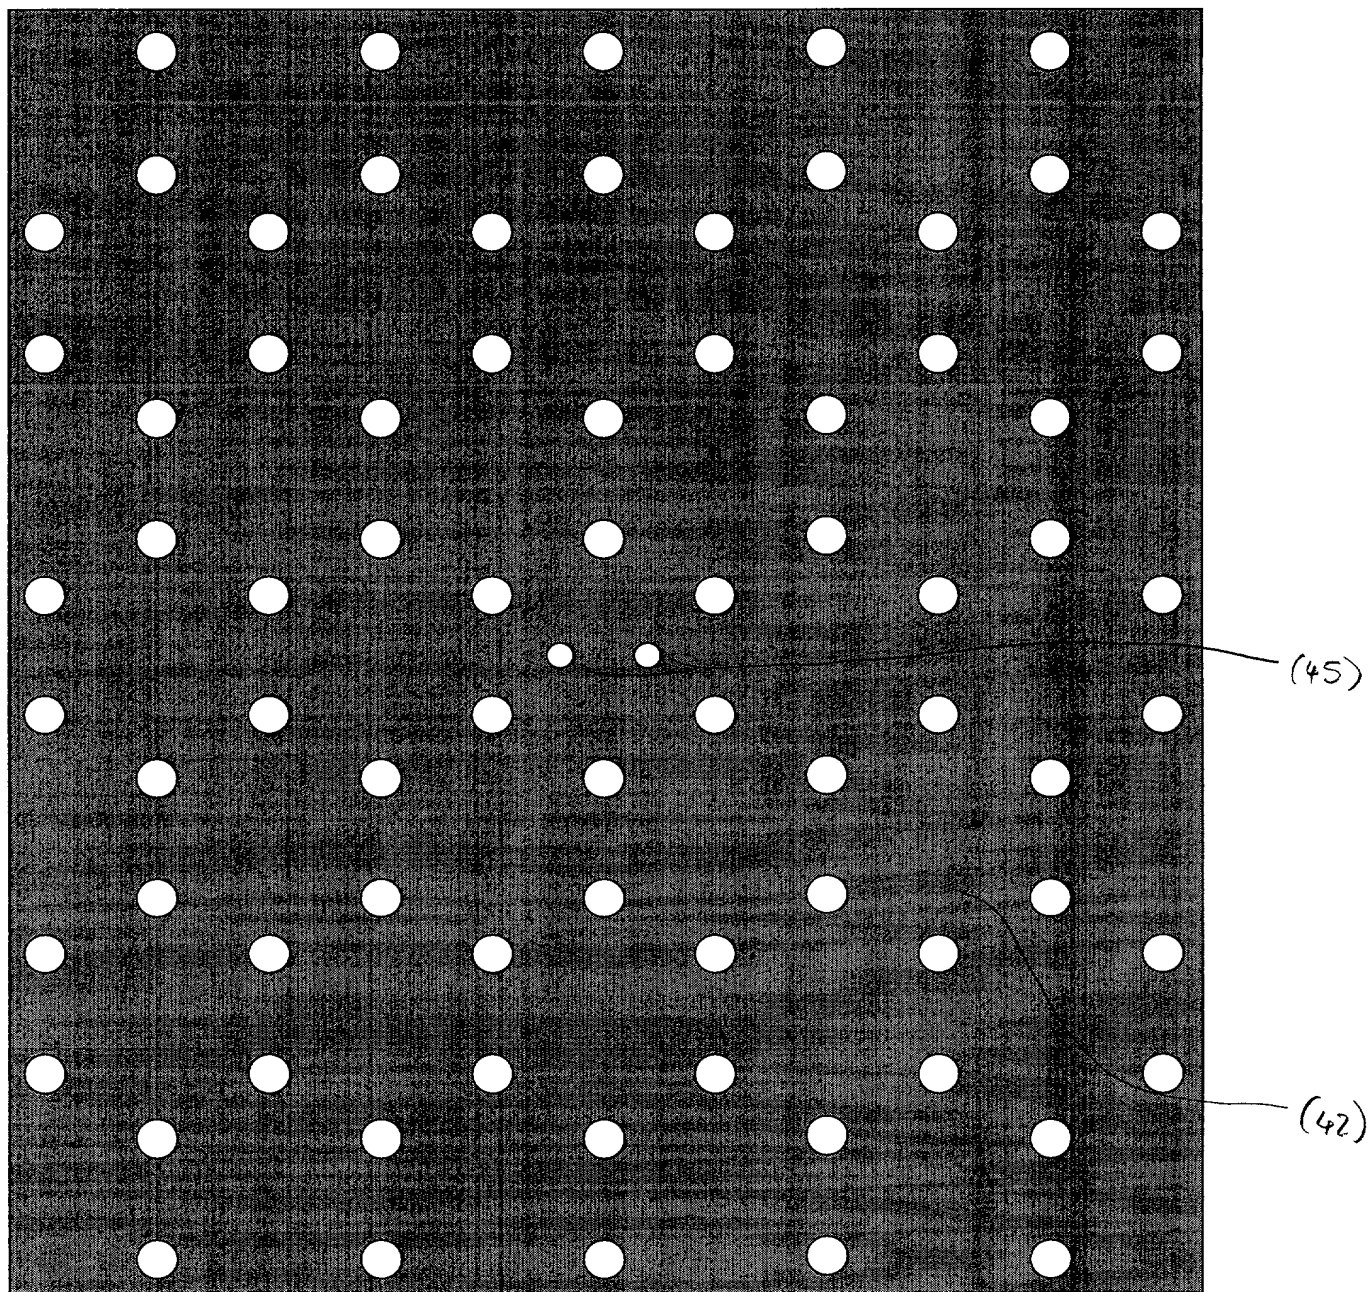


FIG. 38



FIG. 39 is a perspective view of a perforated sheet 42, showing a grid of circular holes 46. The sheet 42 is shown in a perspective view, and the holes 46 are arranged in a regular grid pattern.

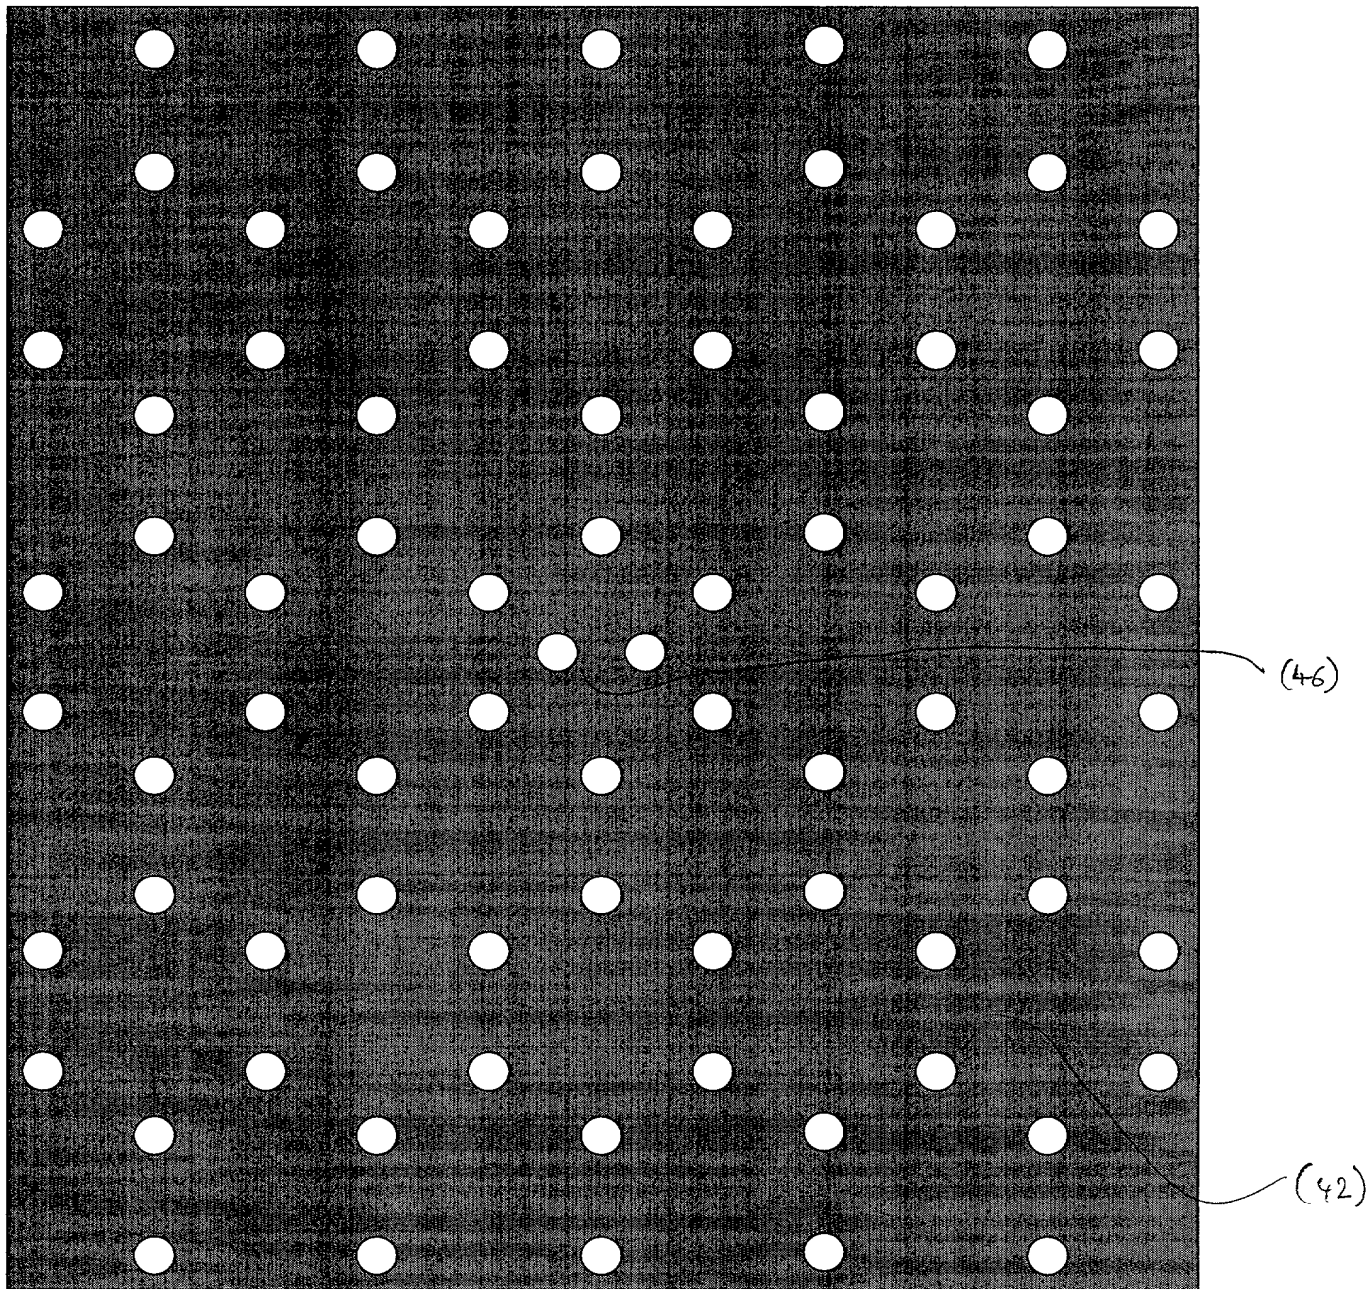


FIG. 39



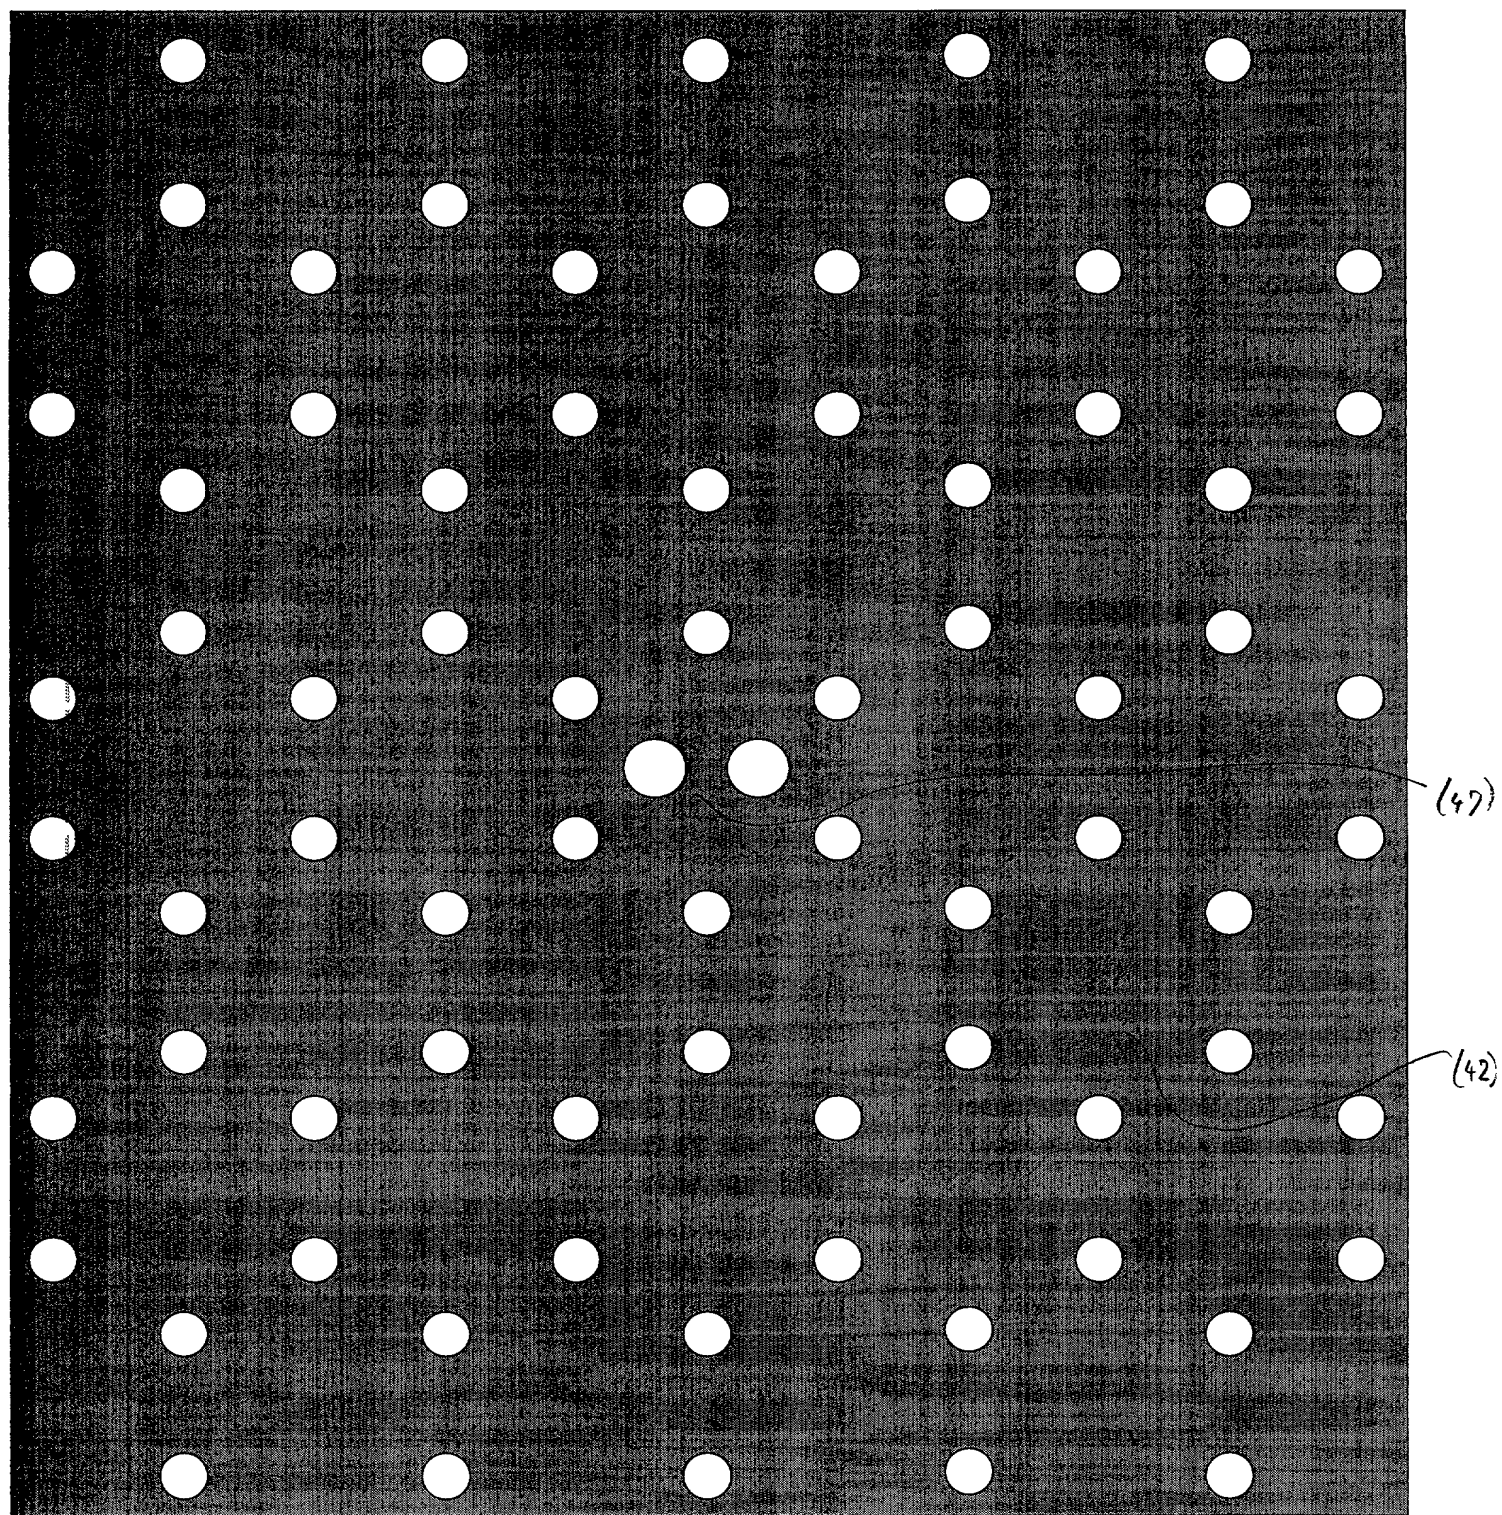


FIG. 40



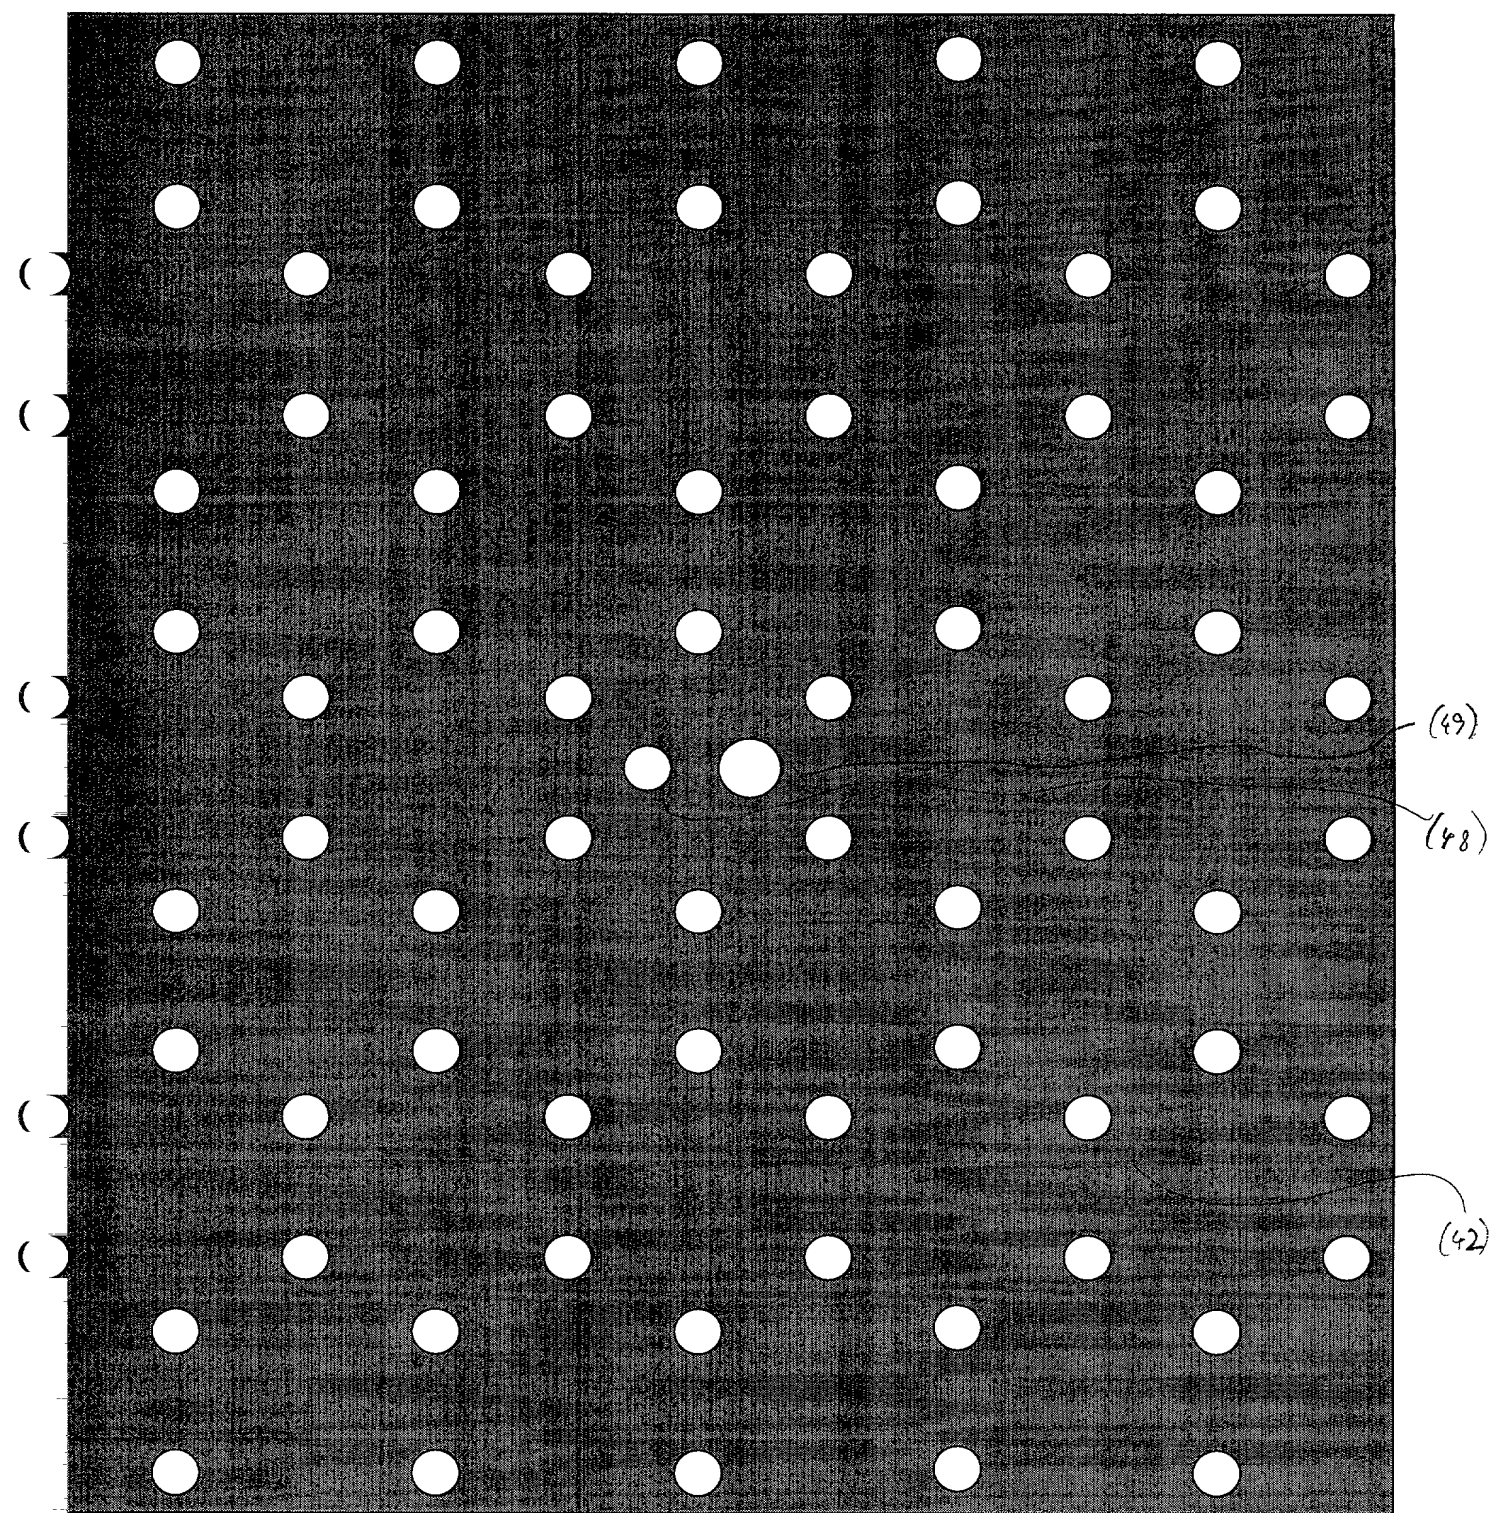


FIG. 41



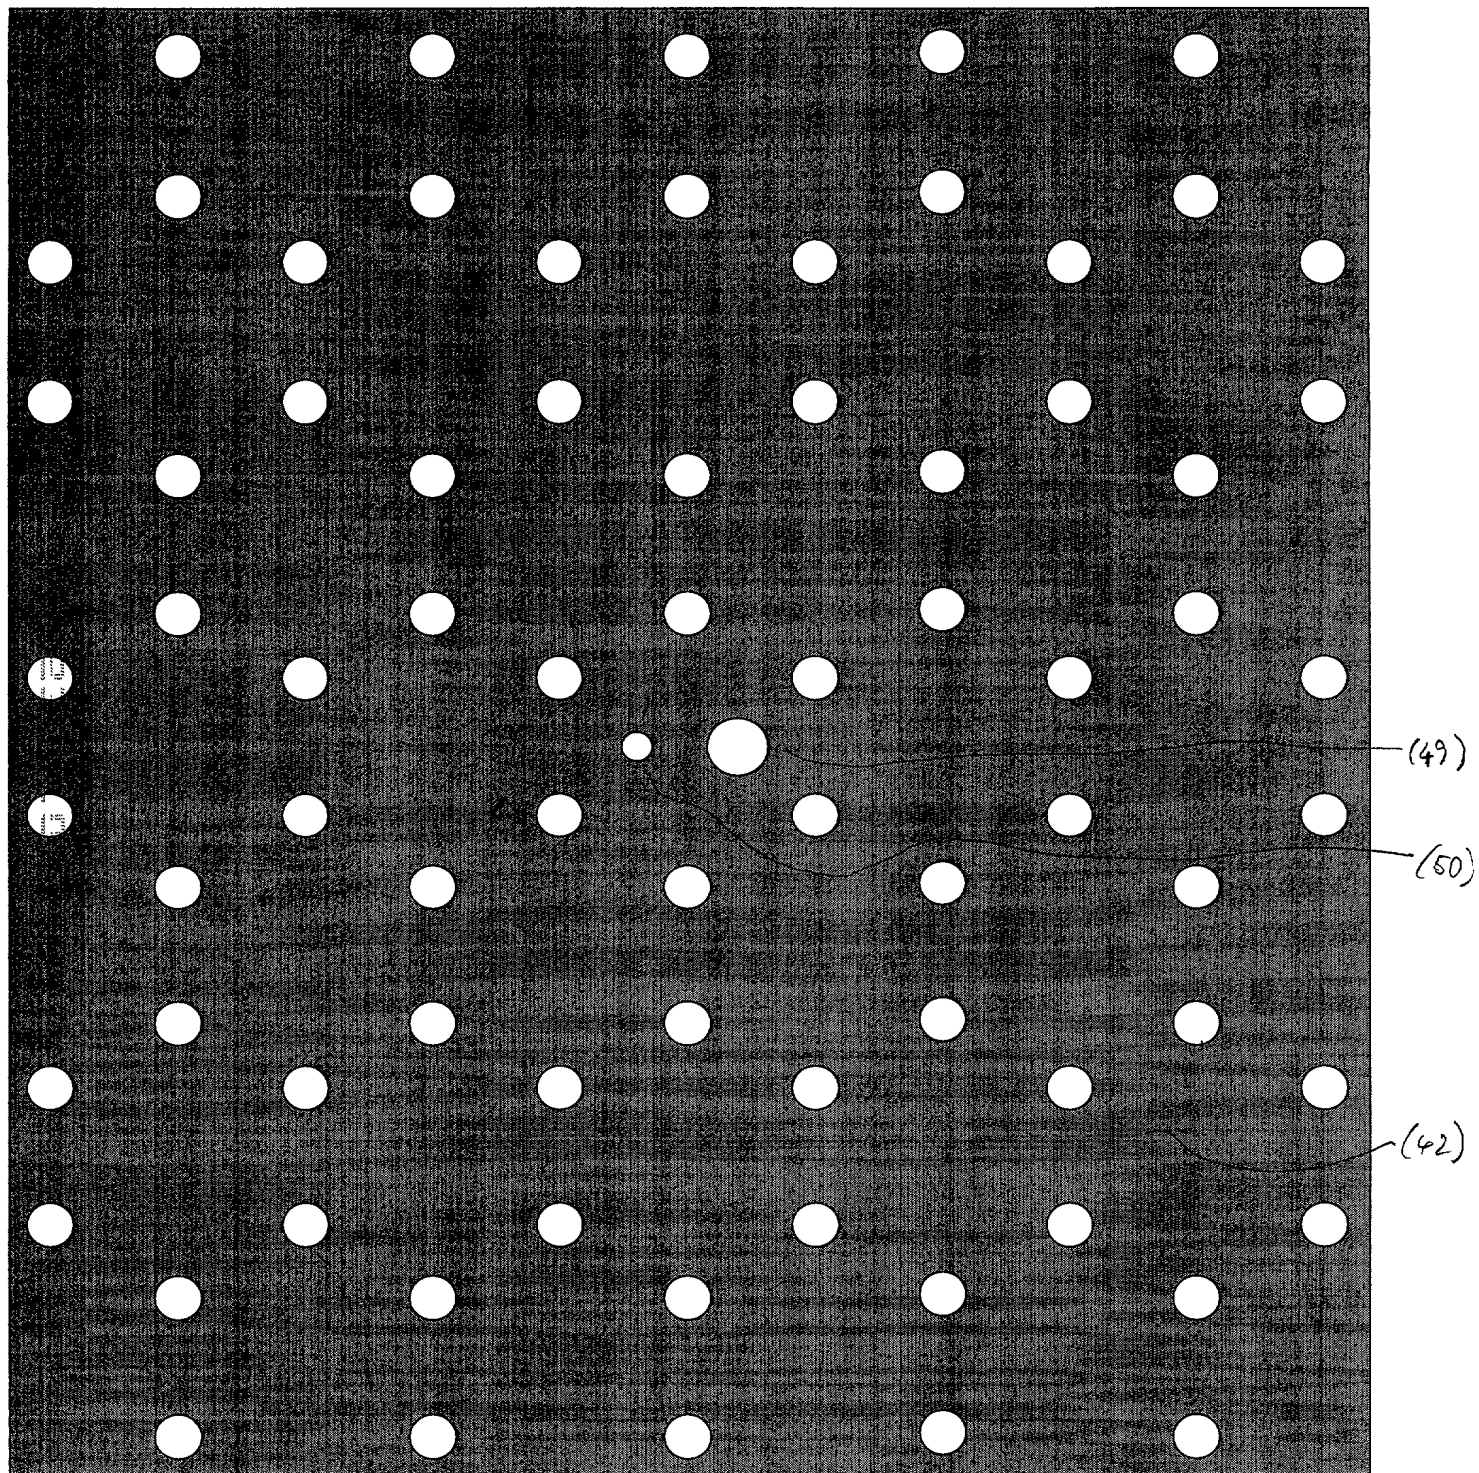


FIG. 42



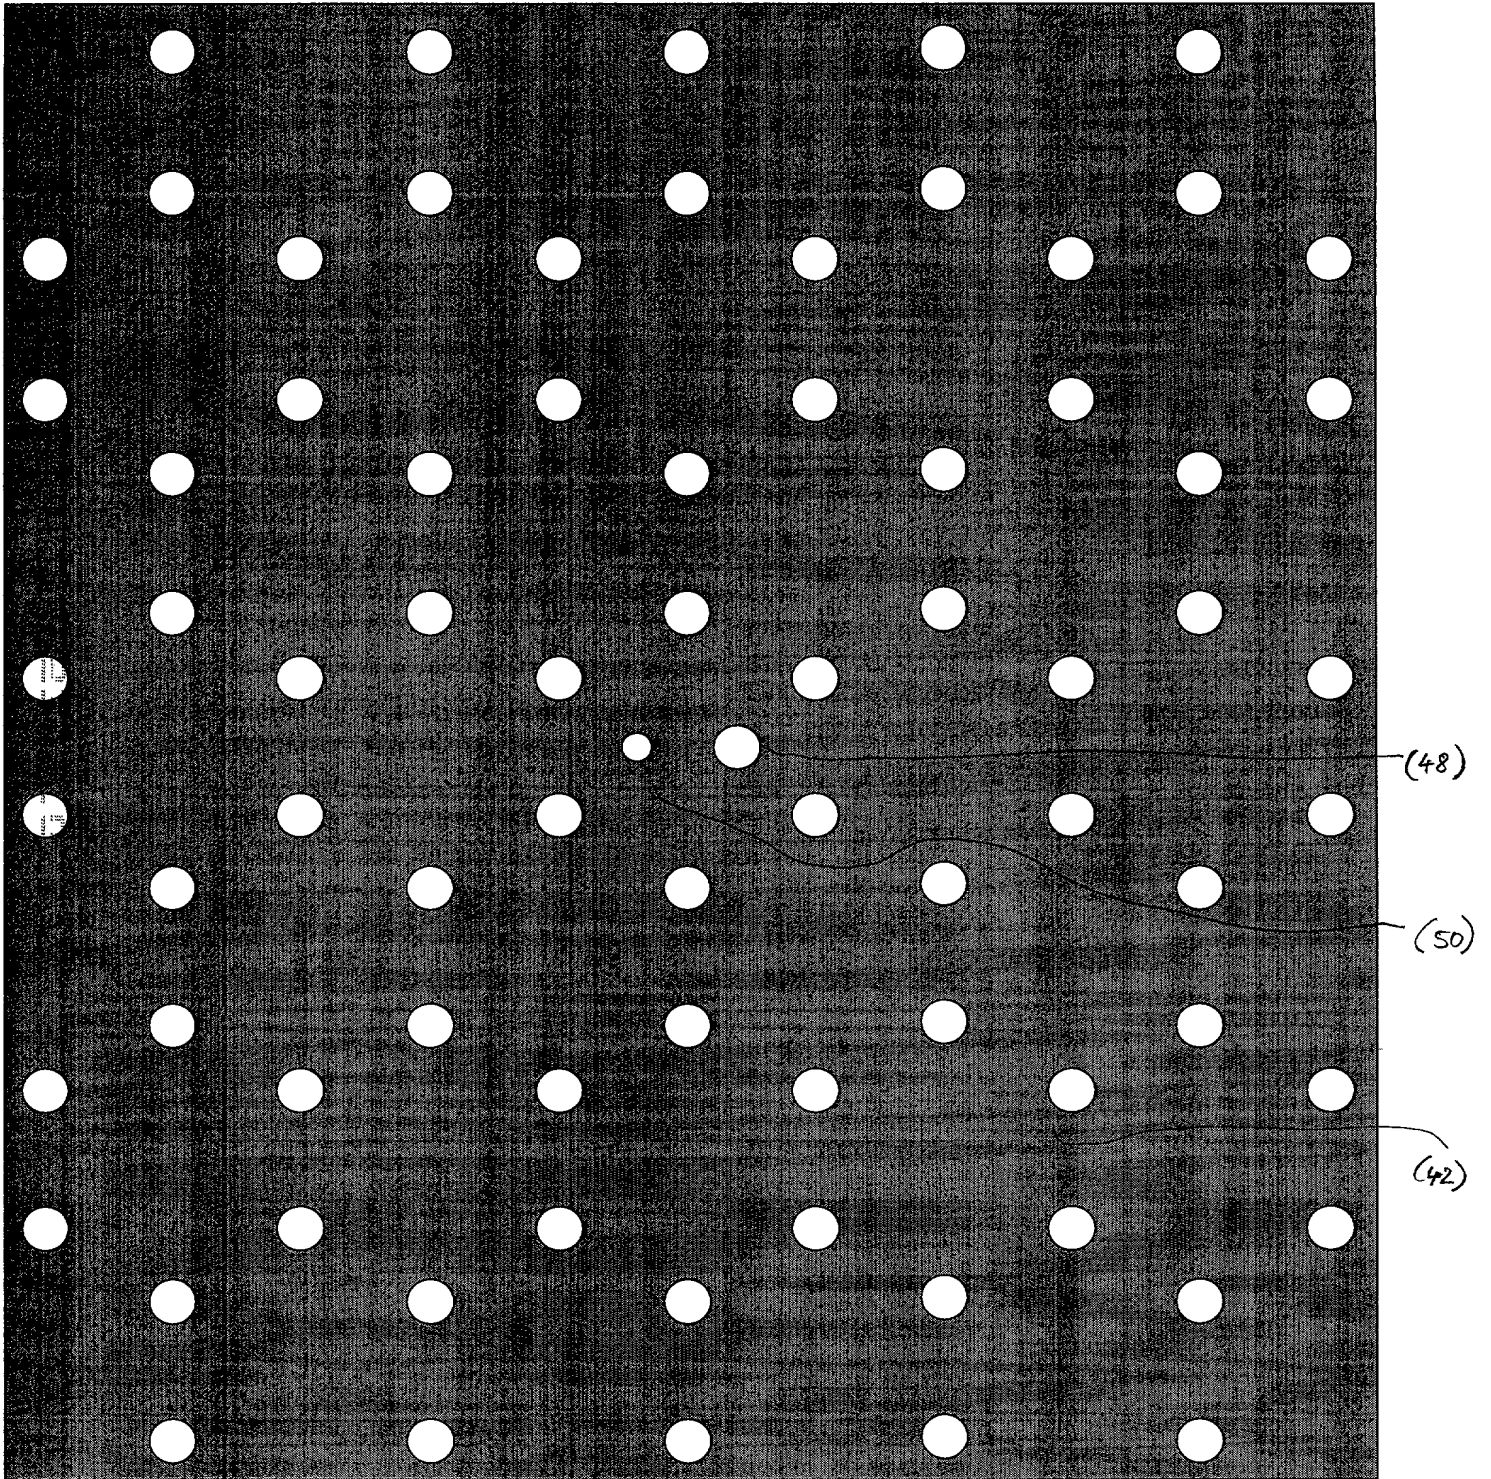


FIG. 43



FIG. 44

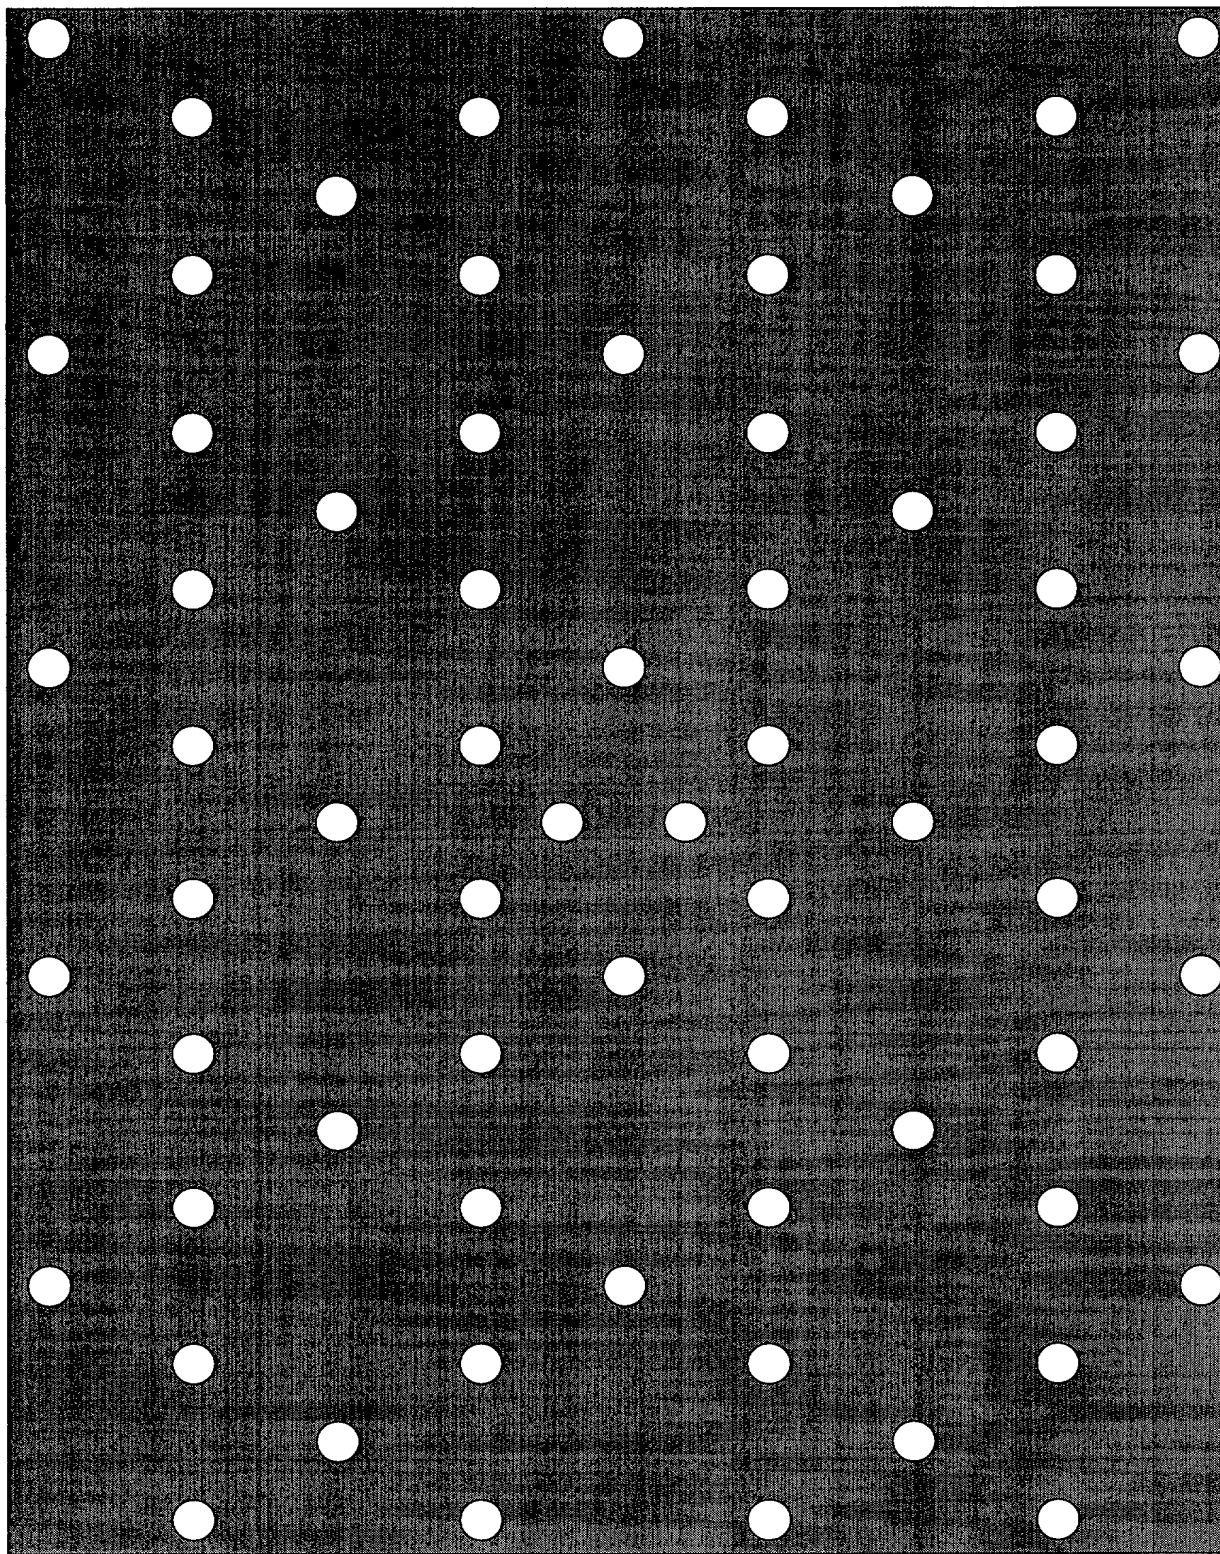


FIG. 44



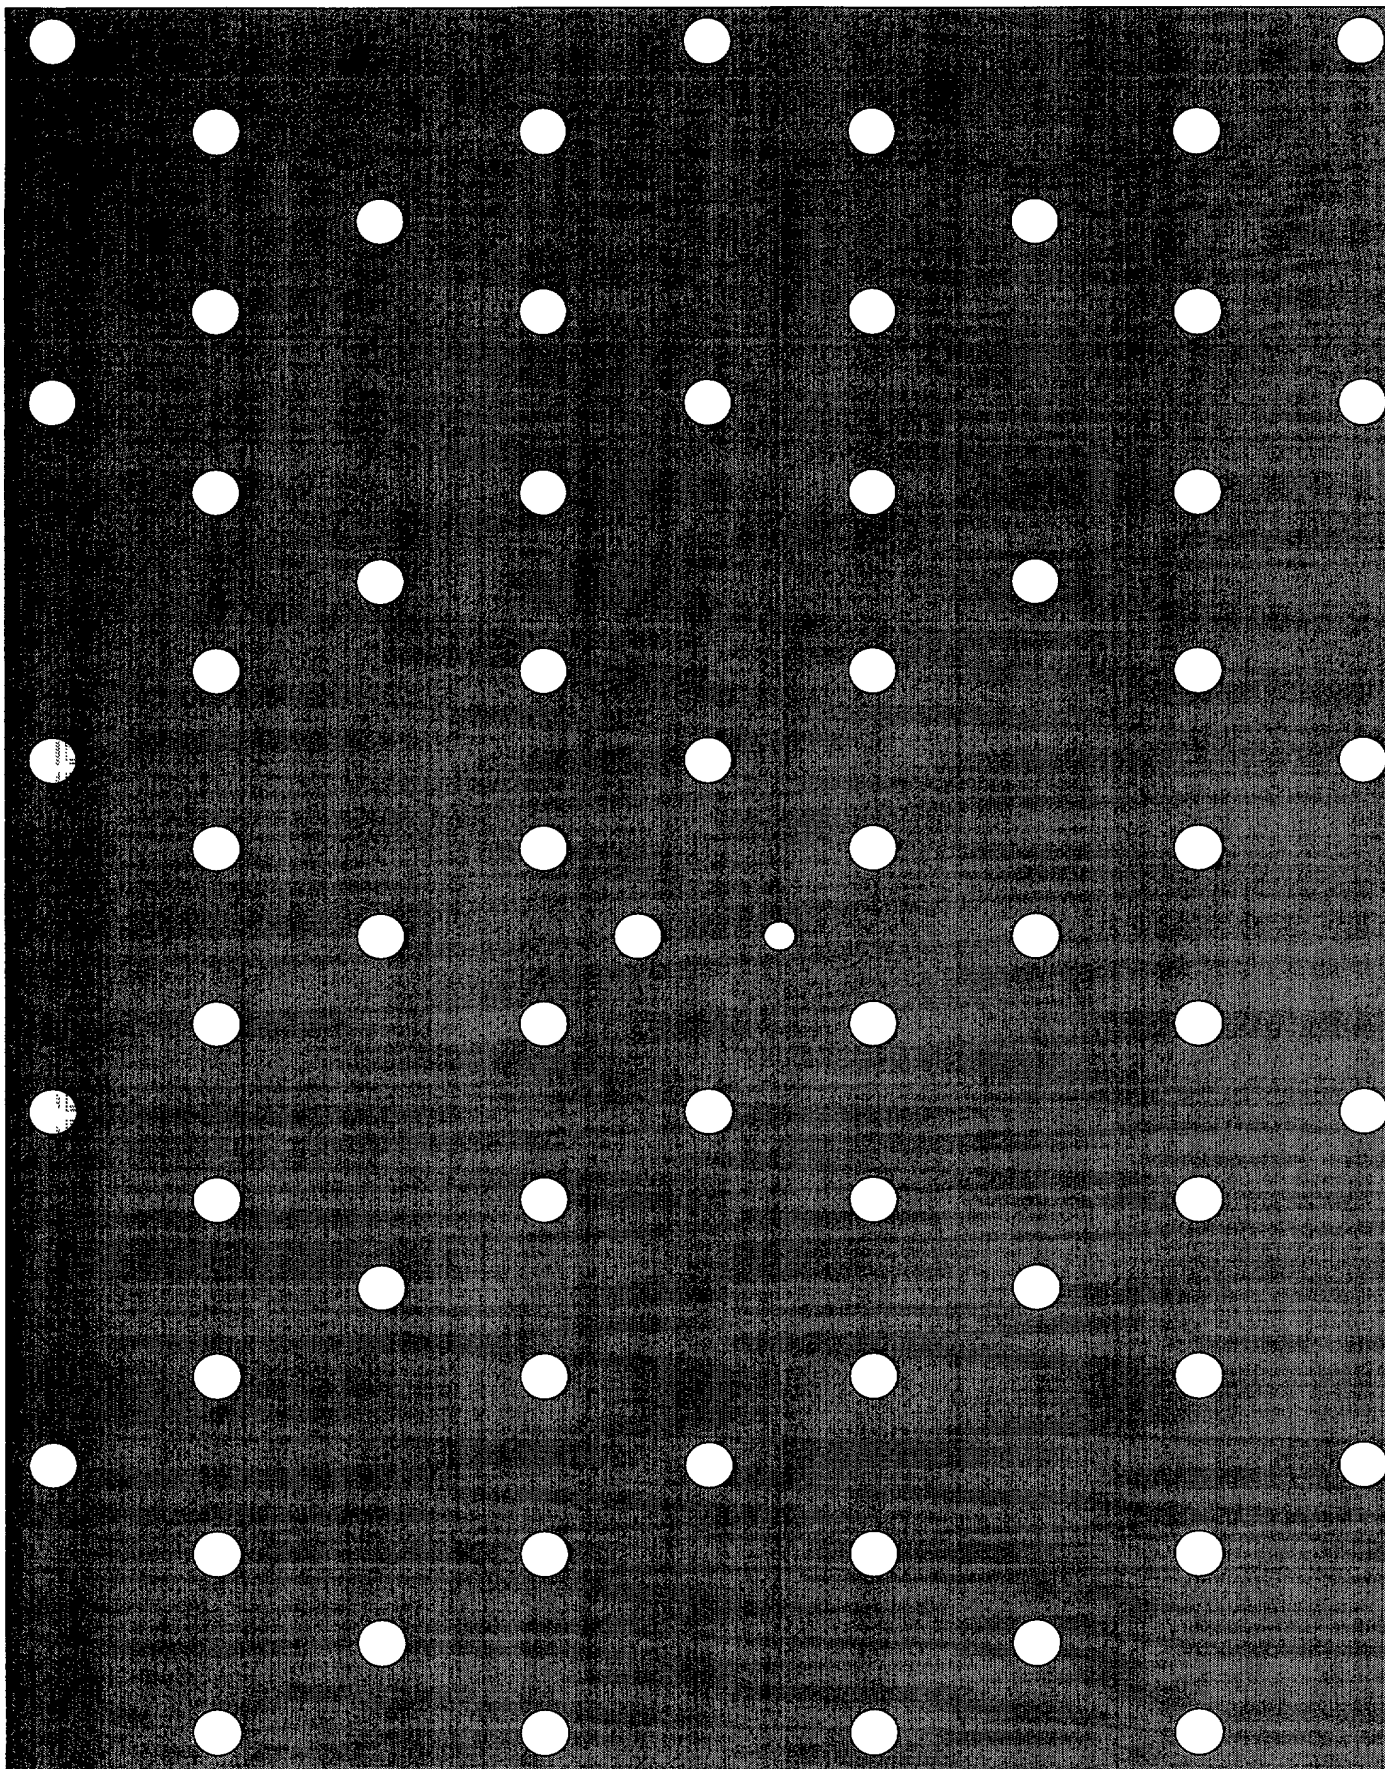


FIG. 45



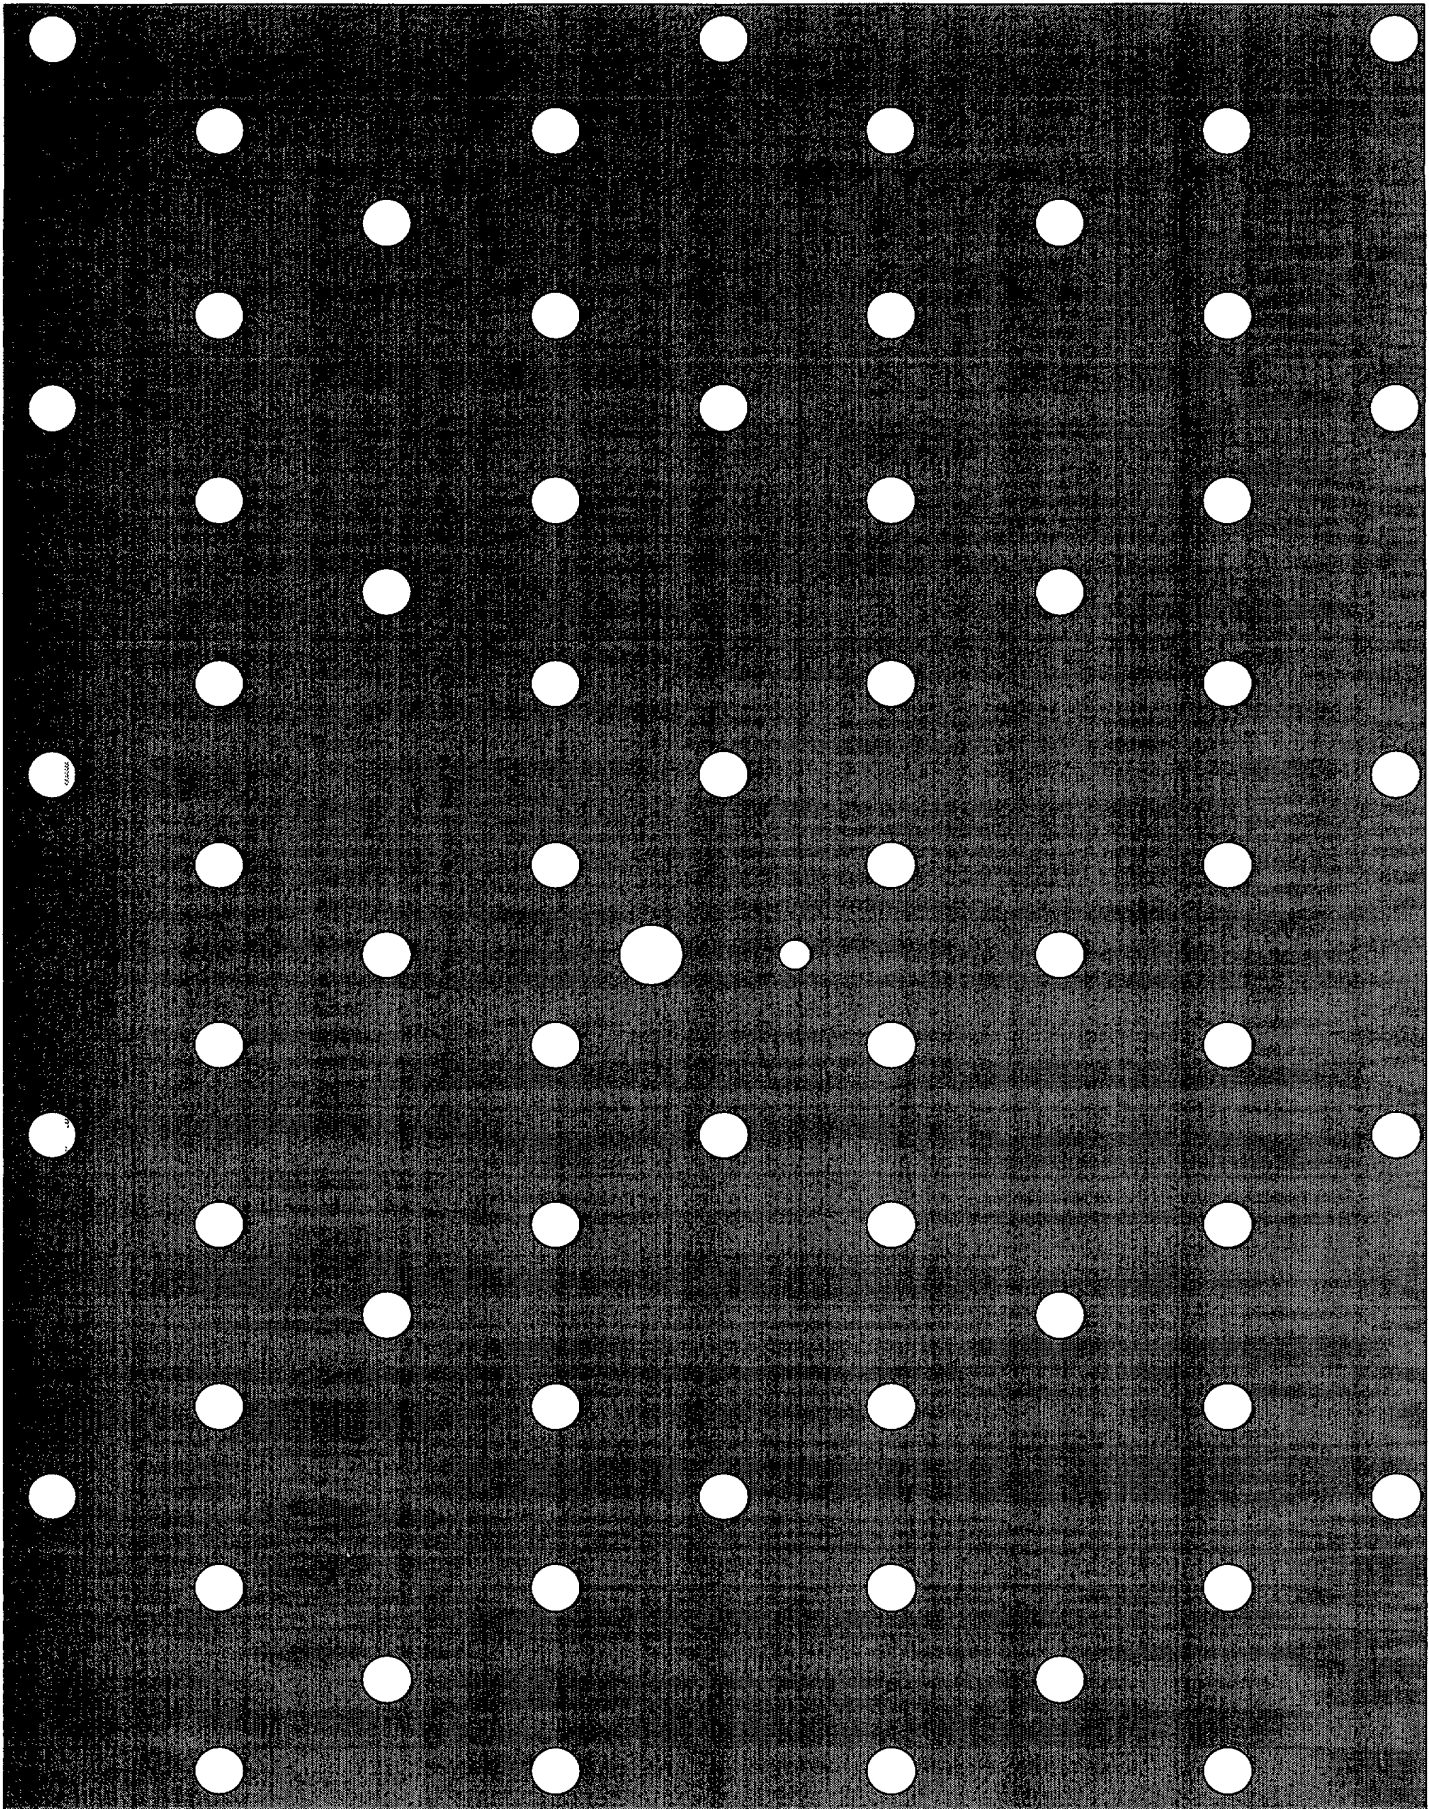


FIG. 46



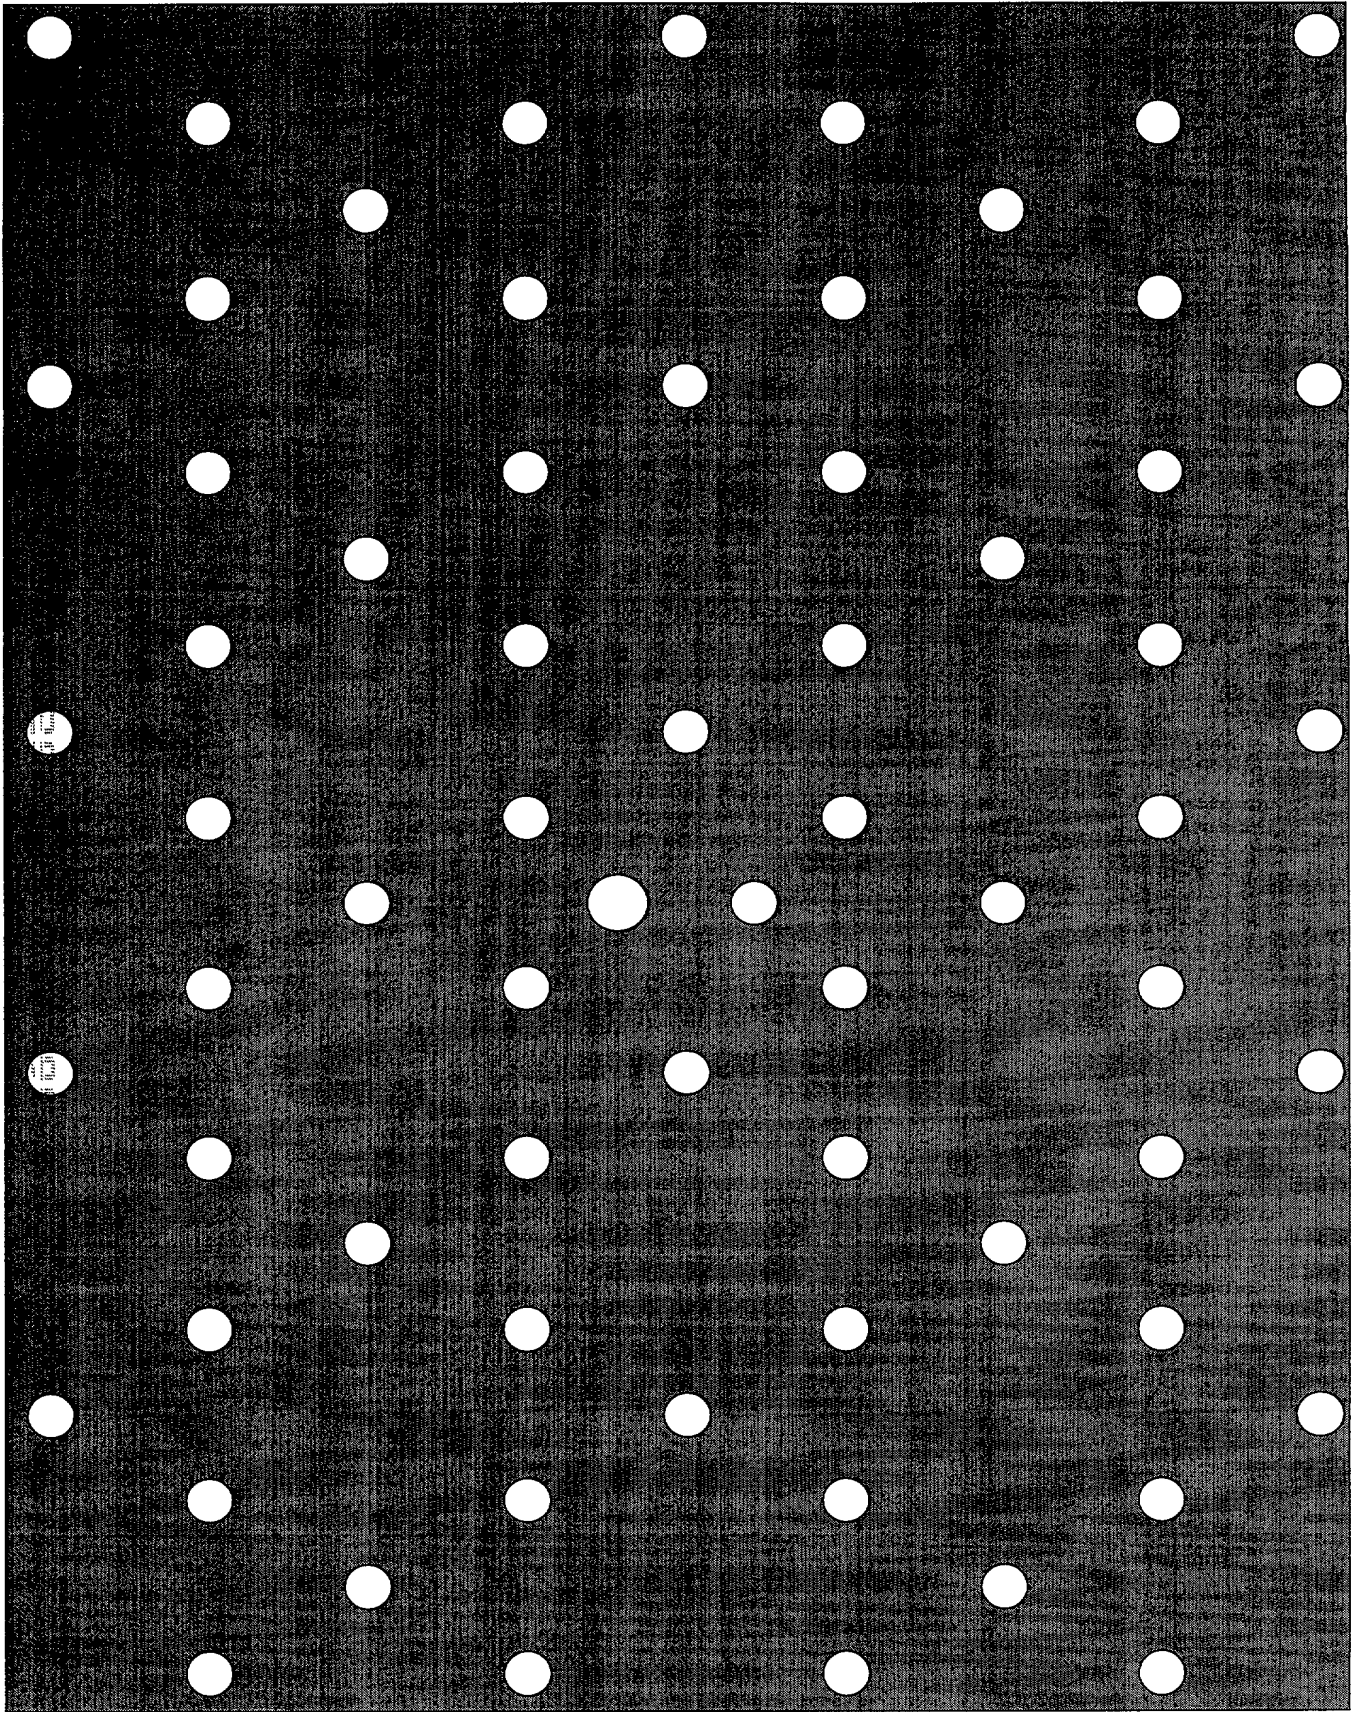


FIG. 42



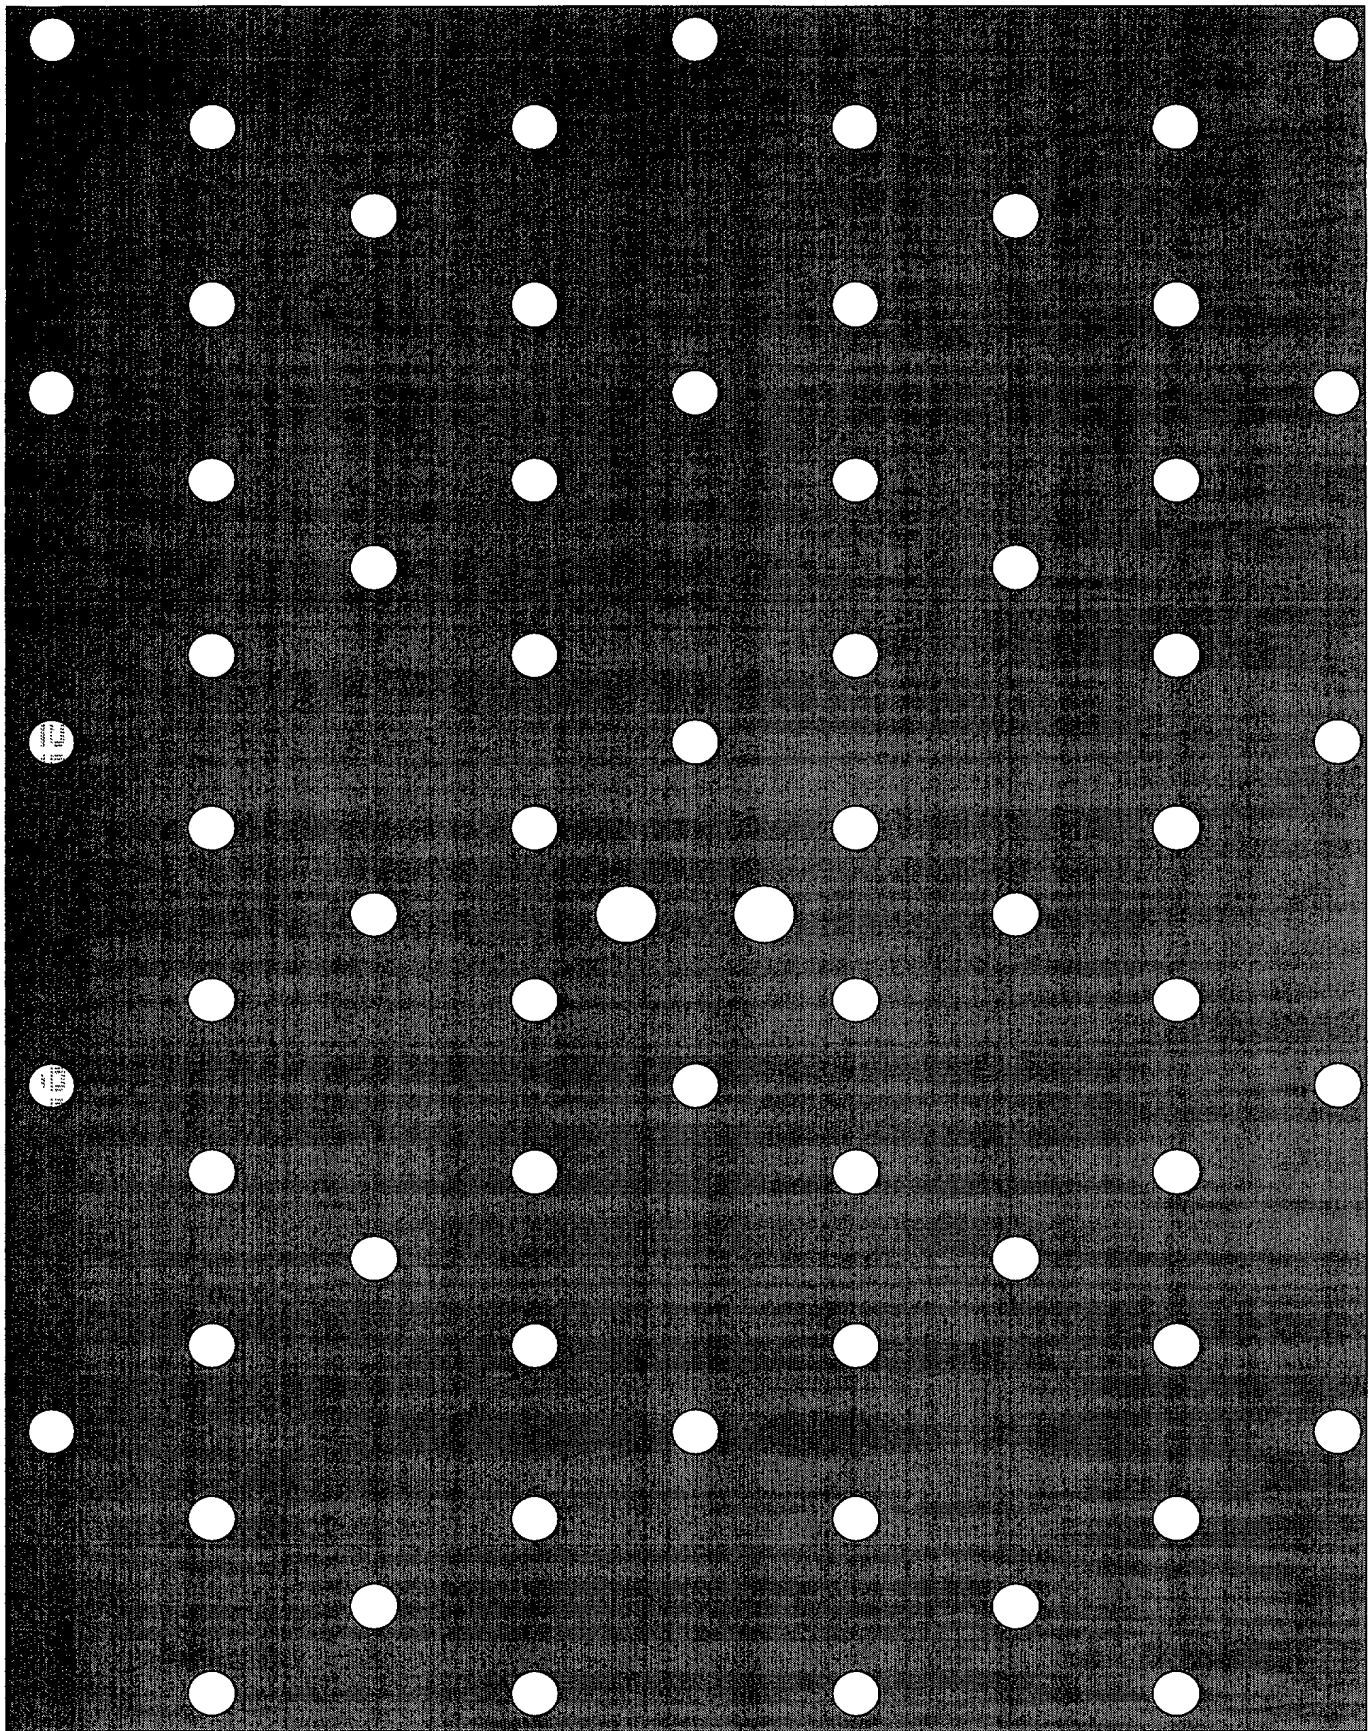


FIG. 48



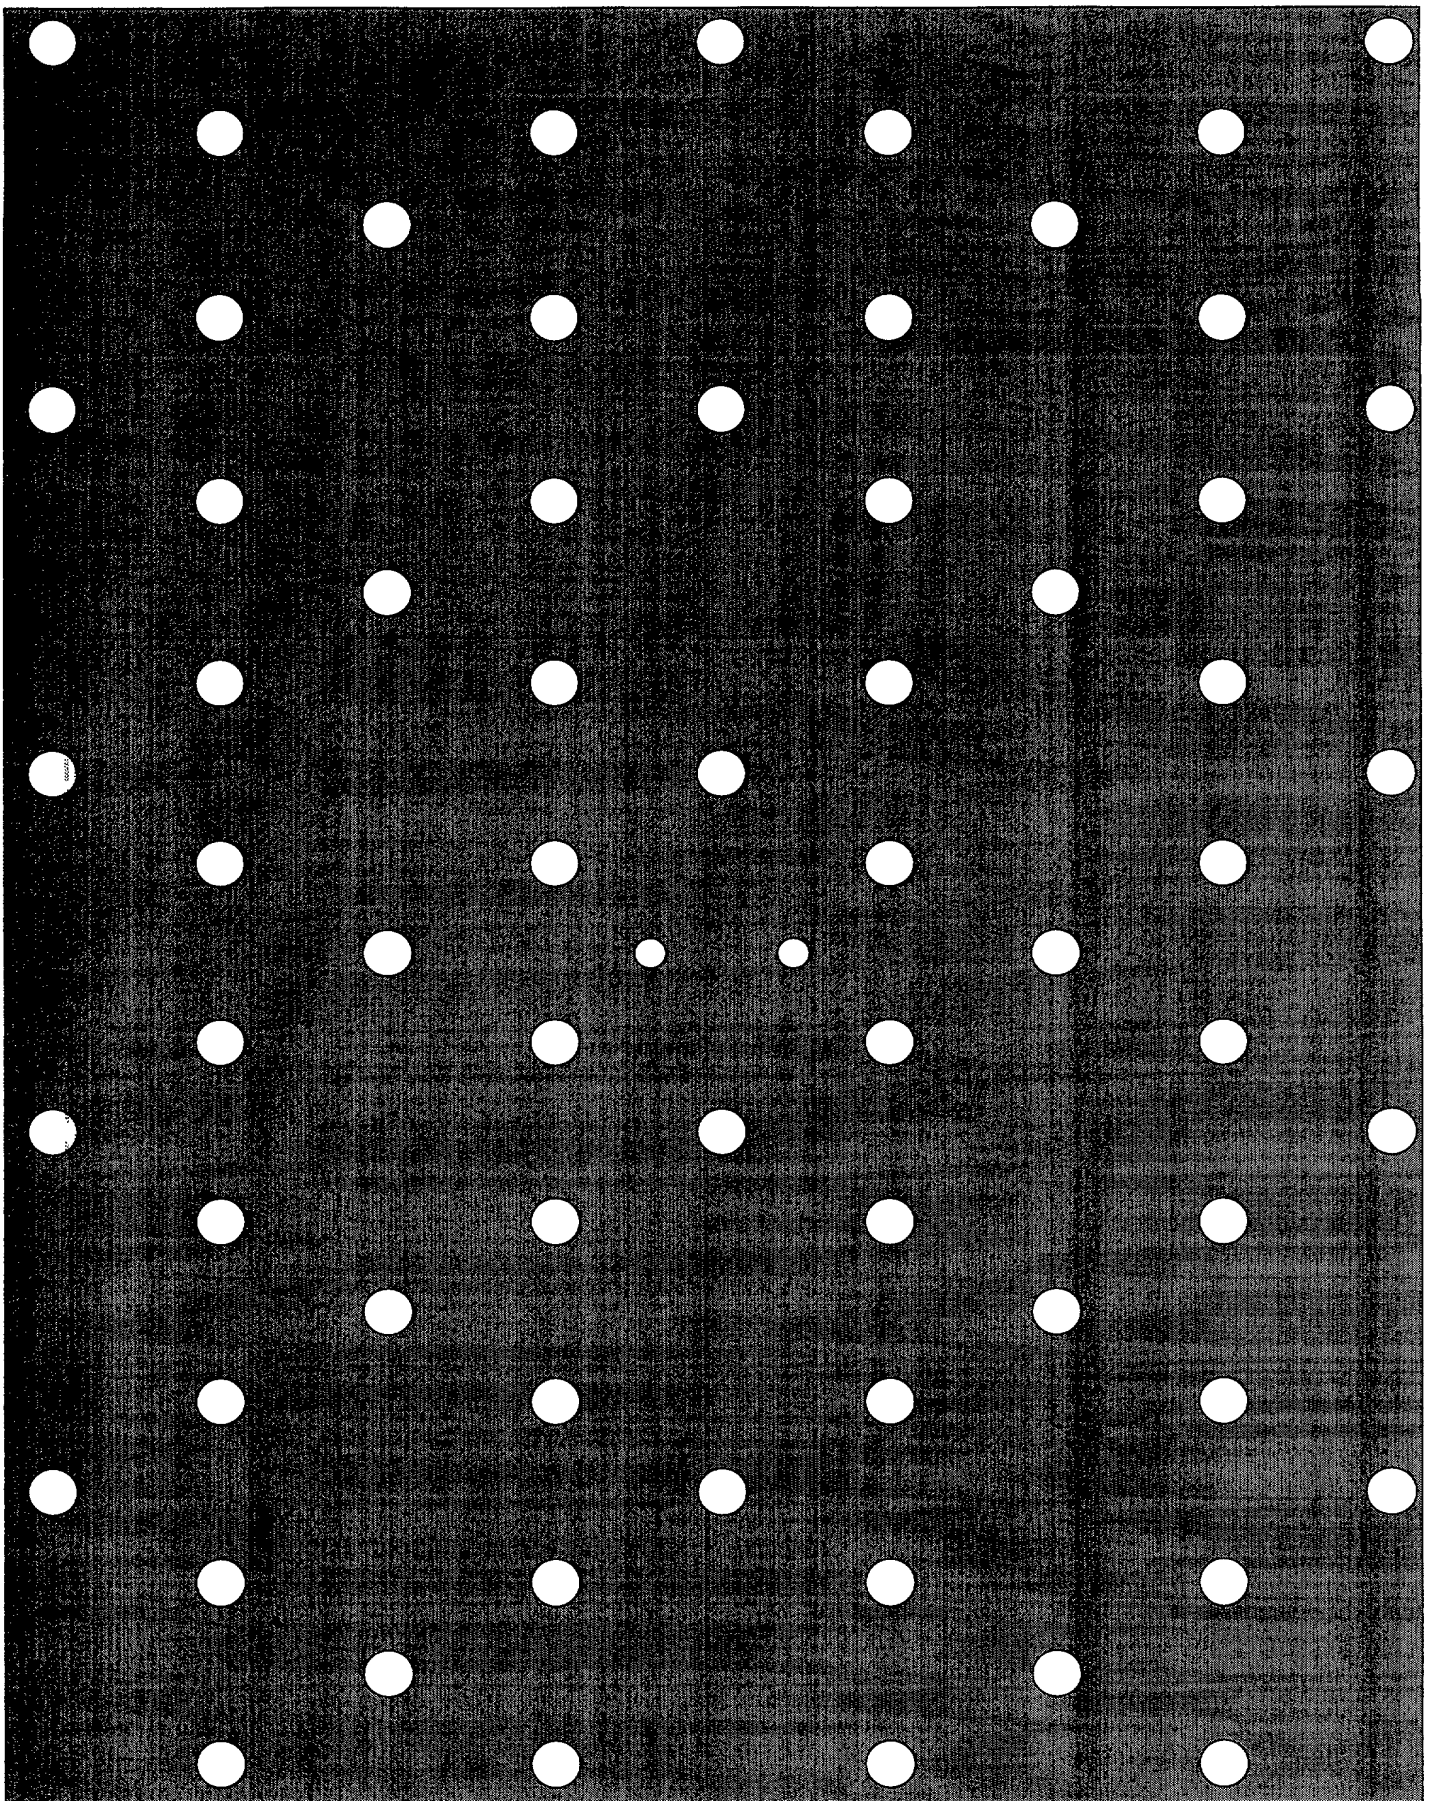


FIG. 49



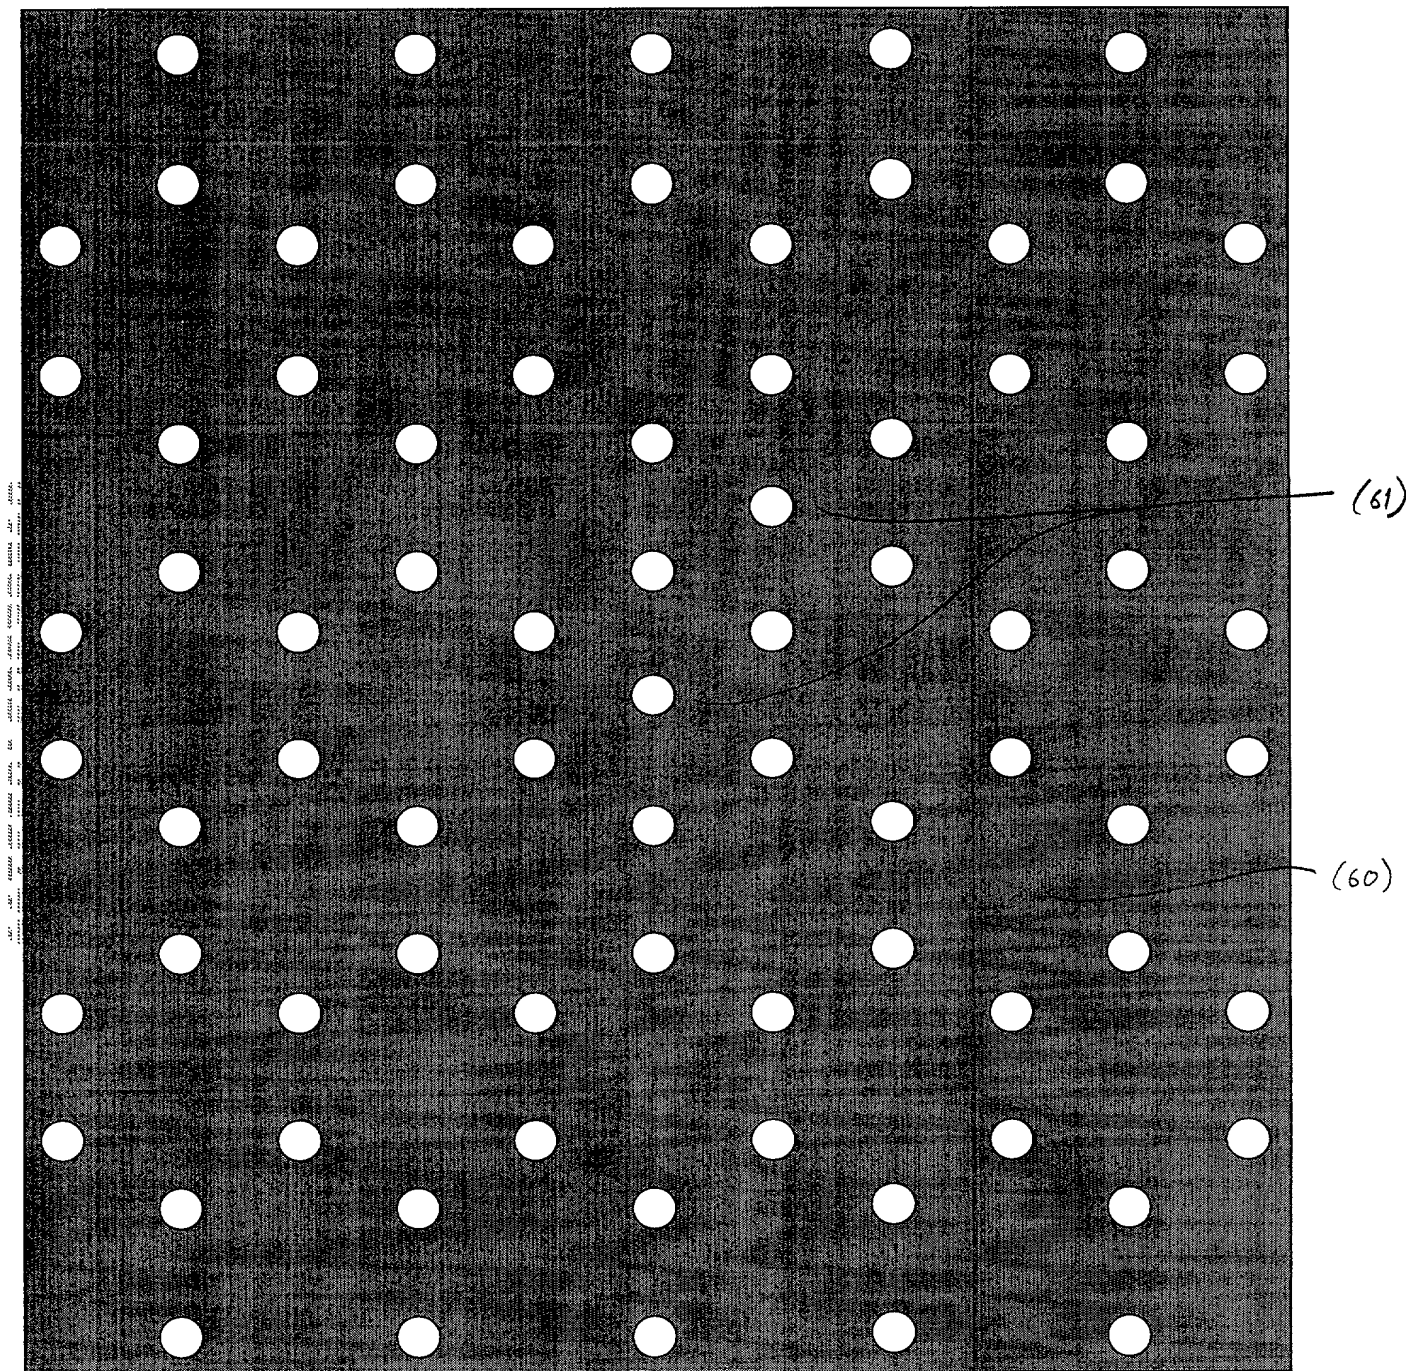


FIG. 50



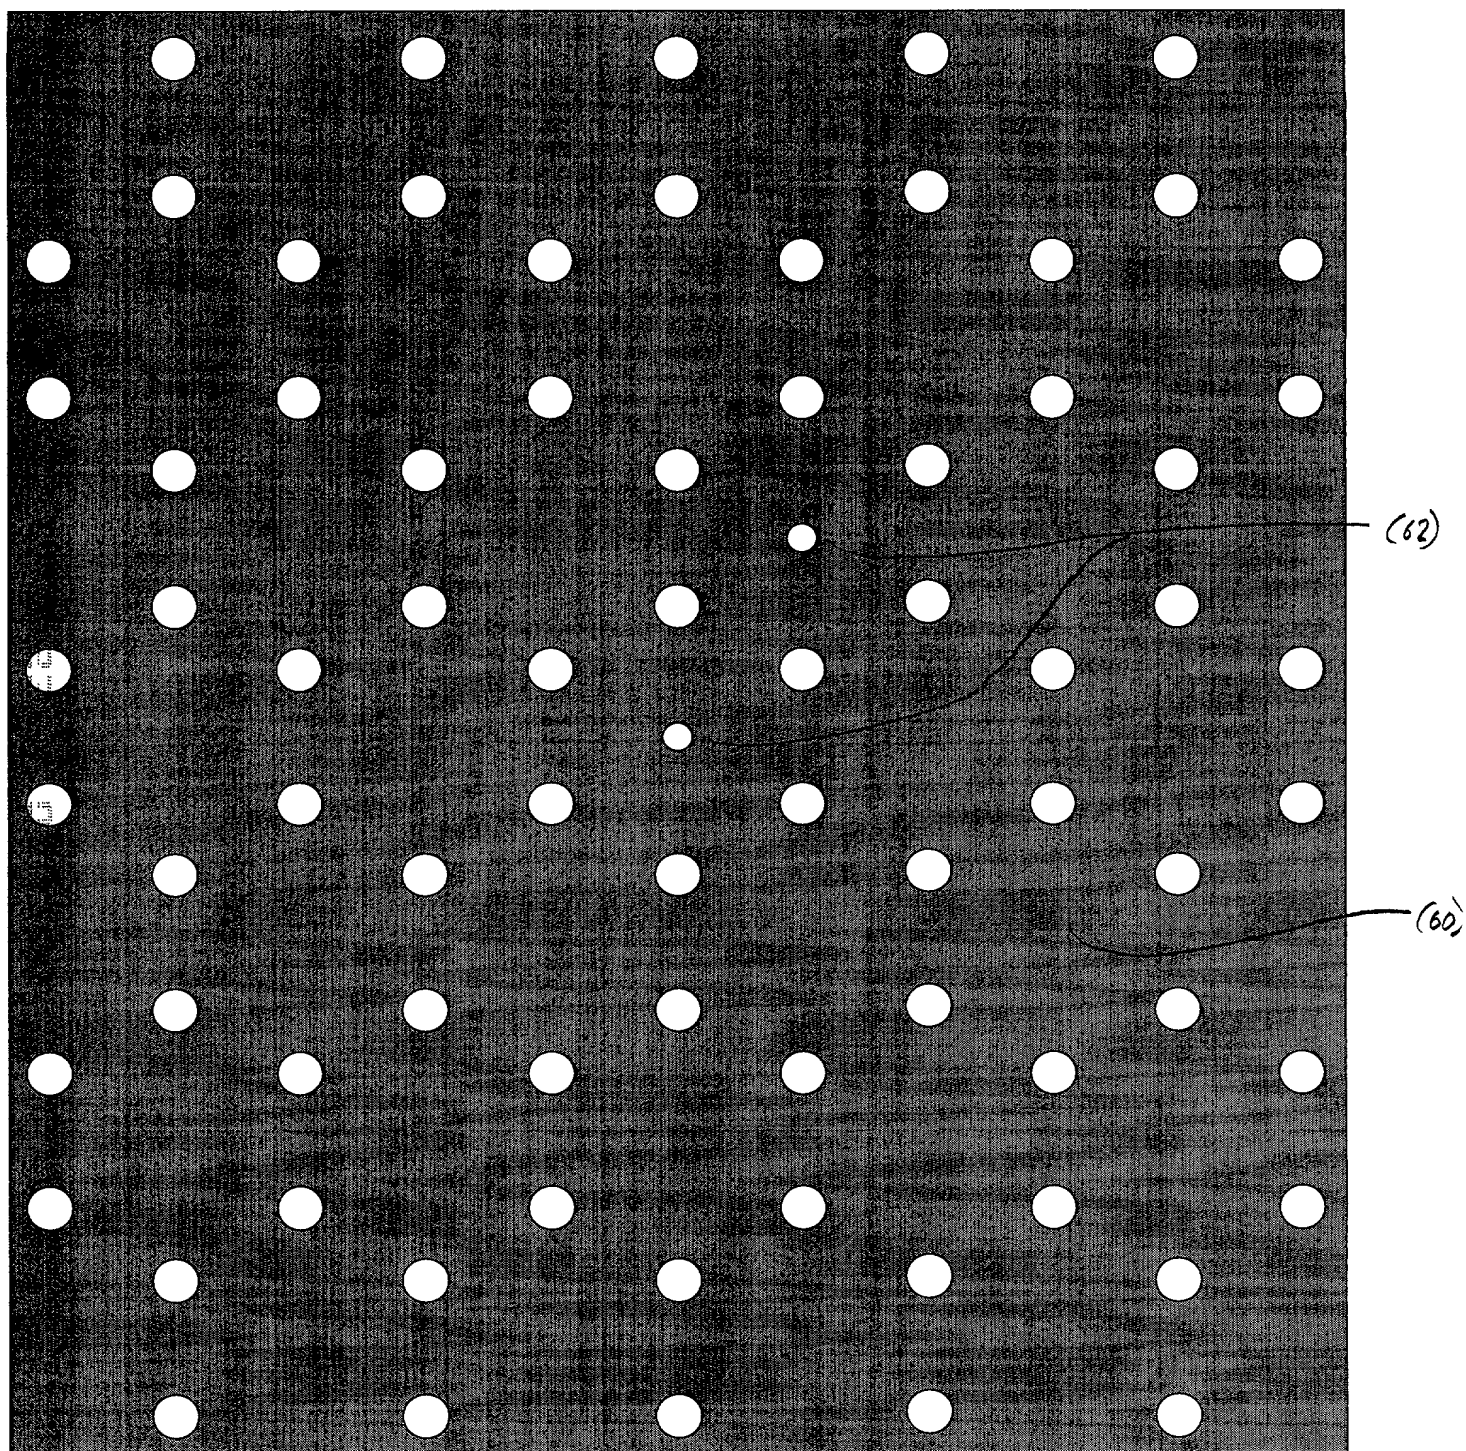


FIG. 51



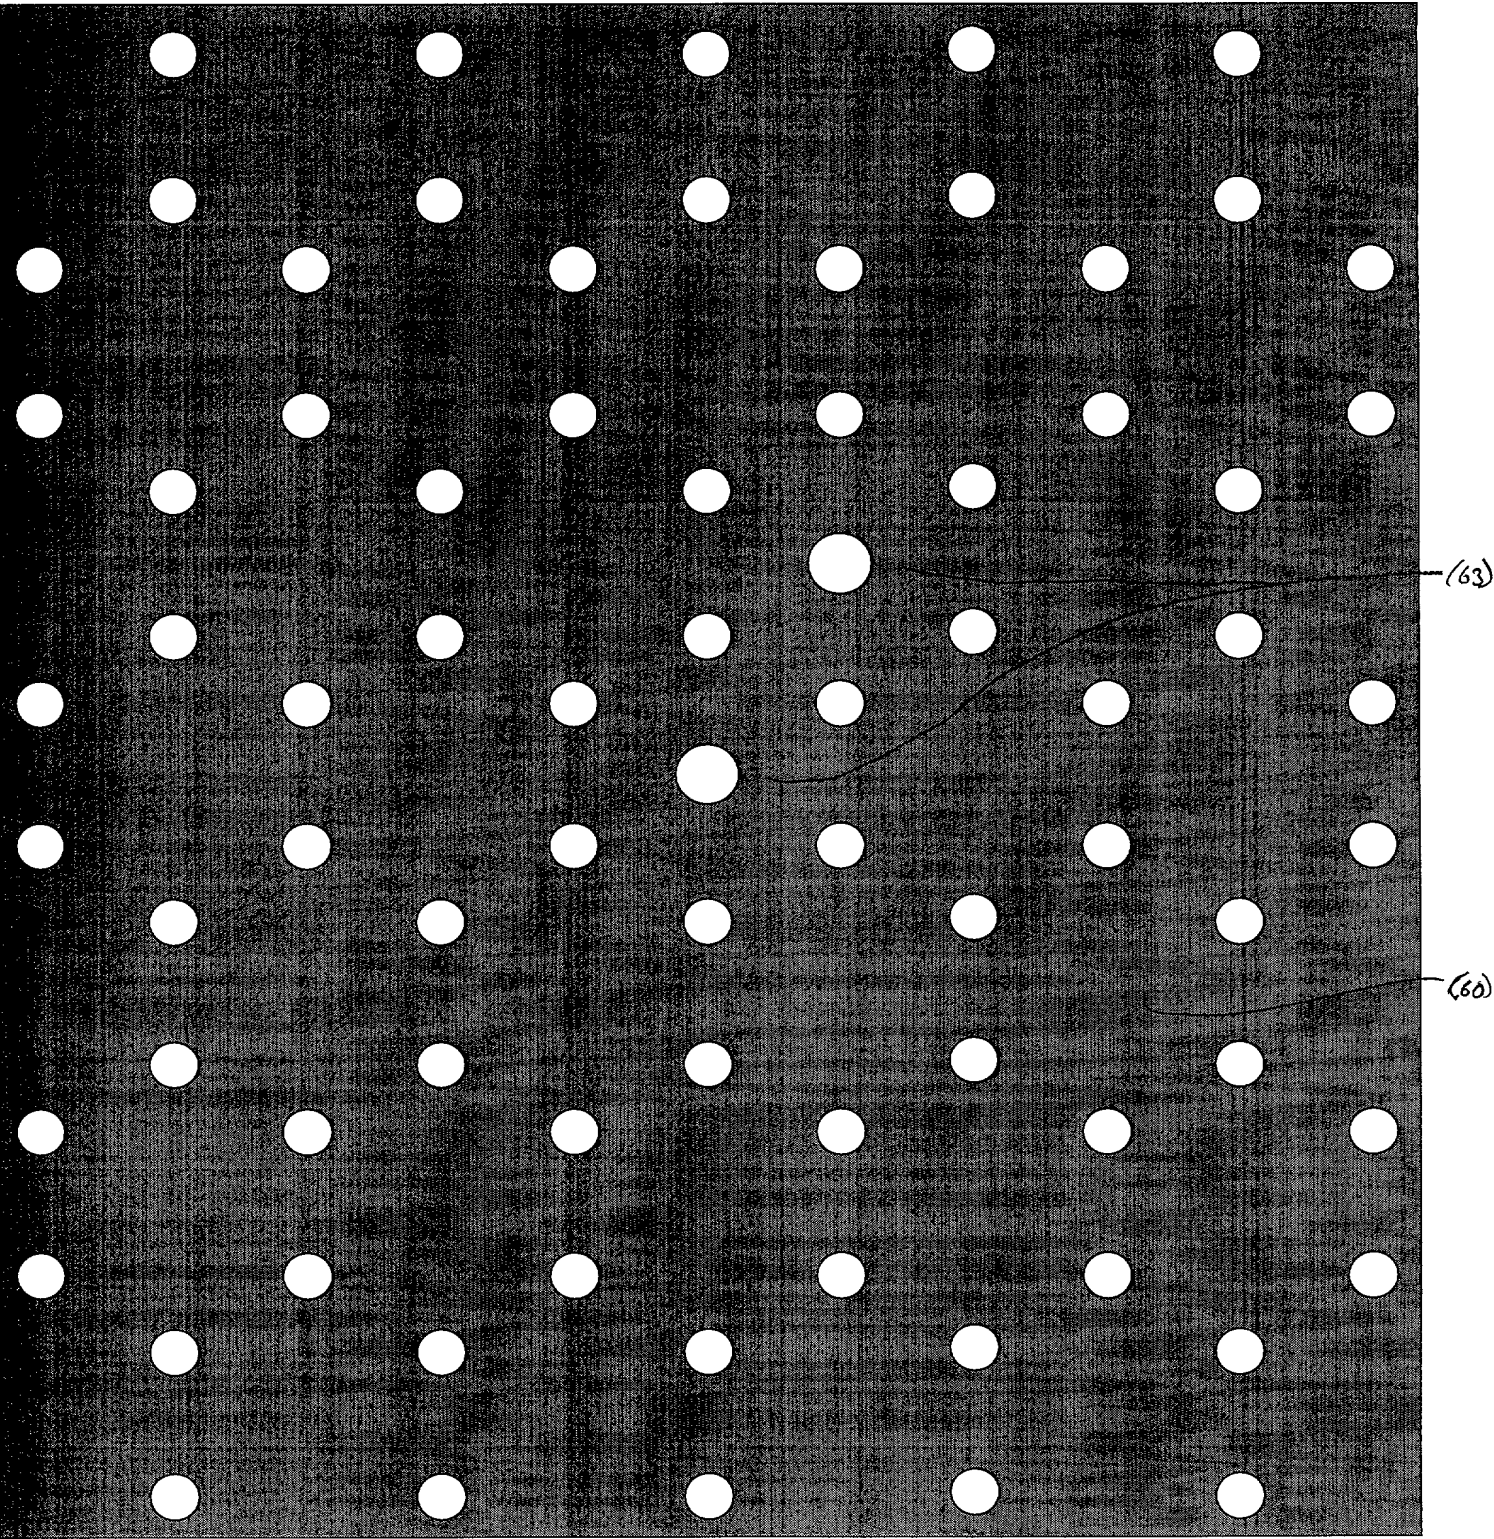


FIG. 52



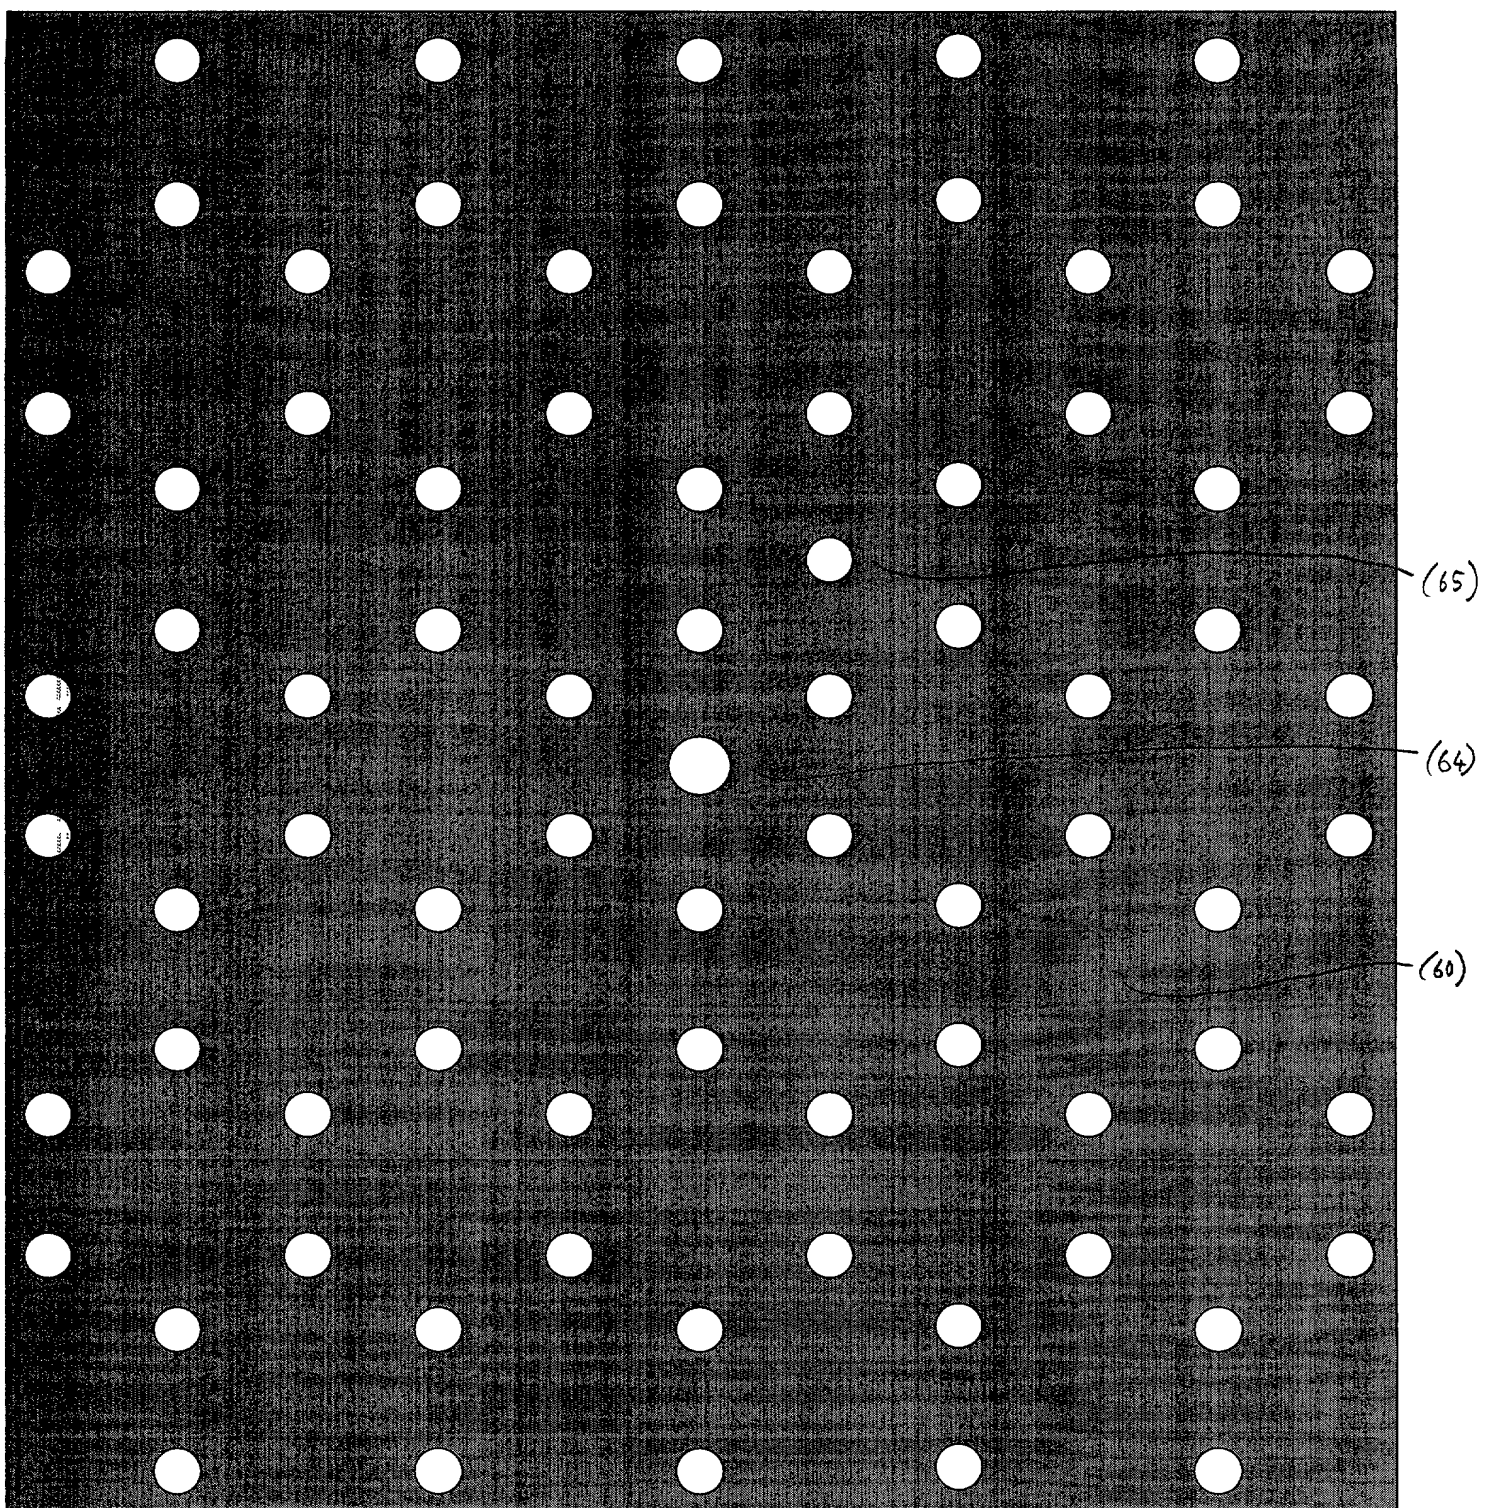


FIG. 53



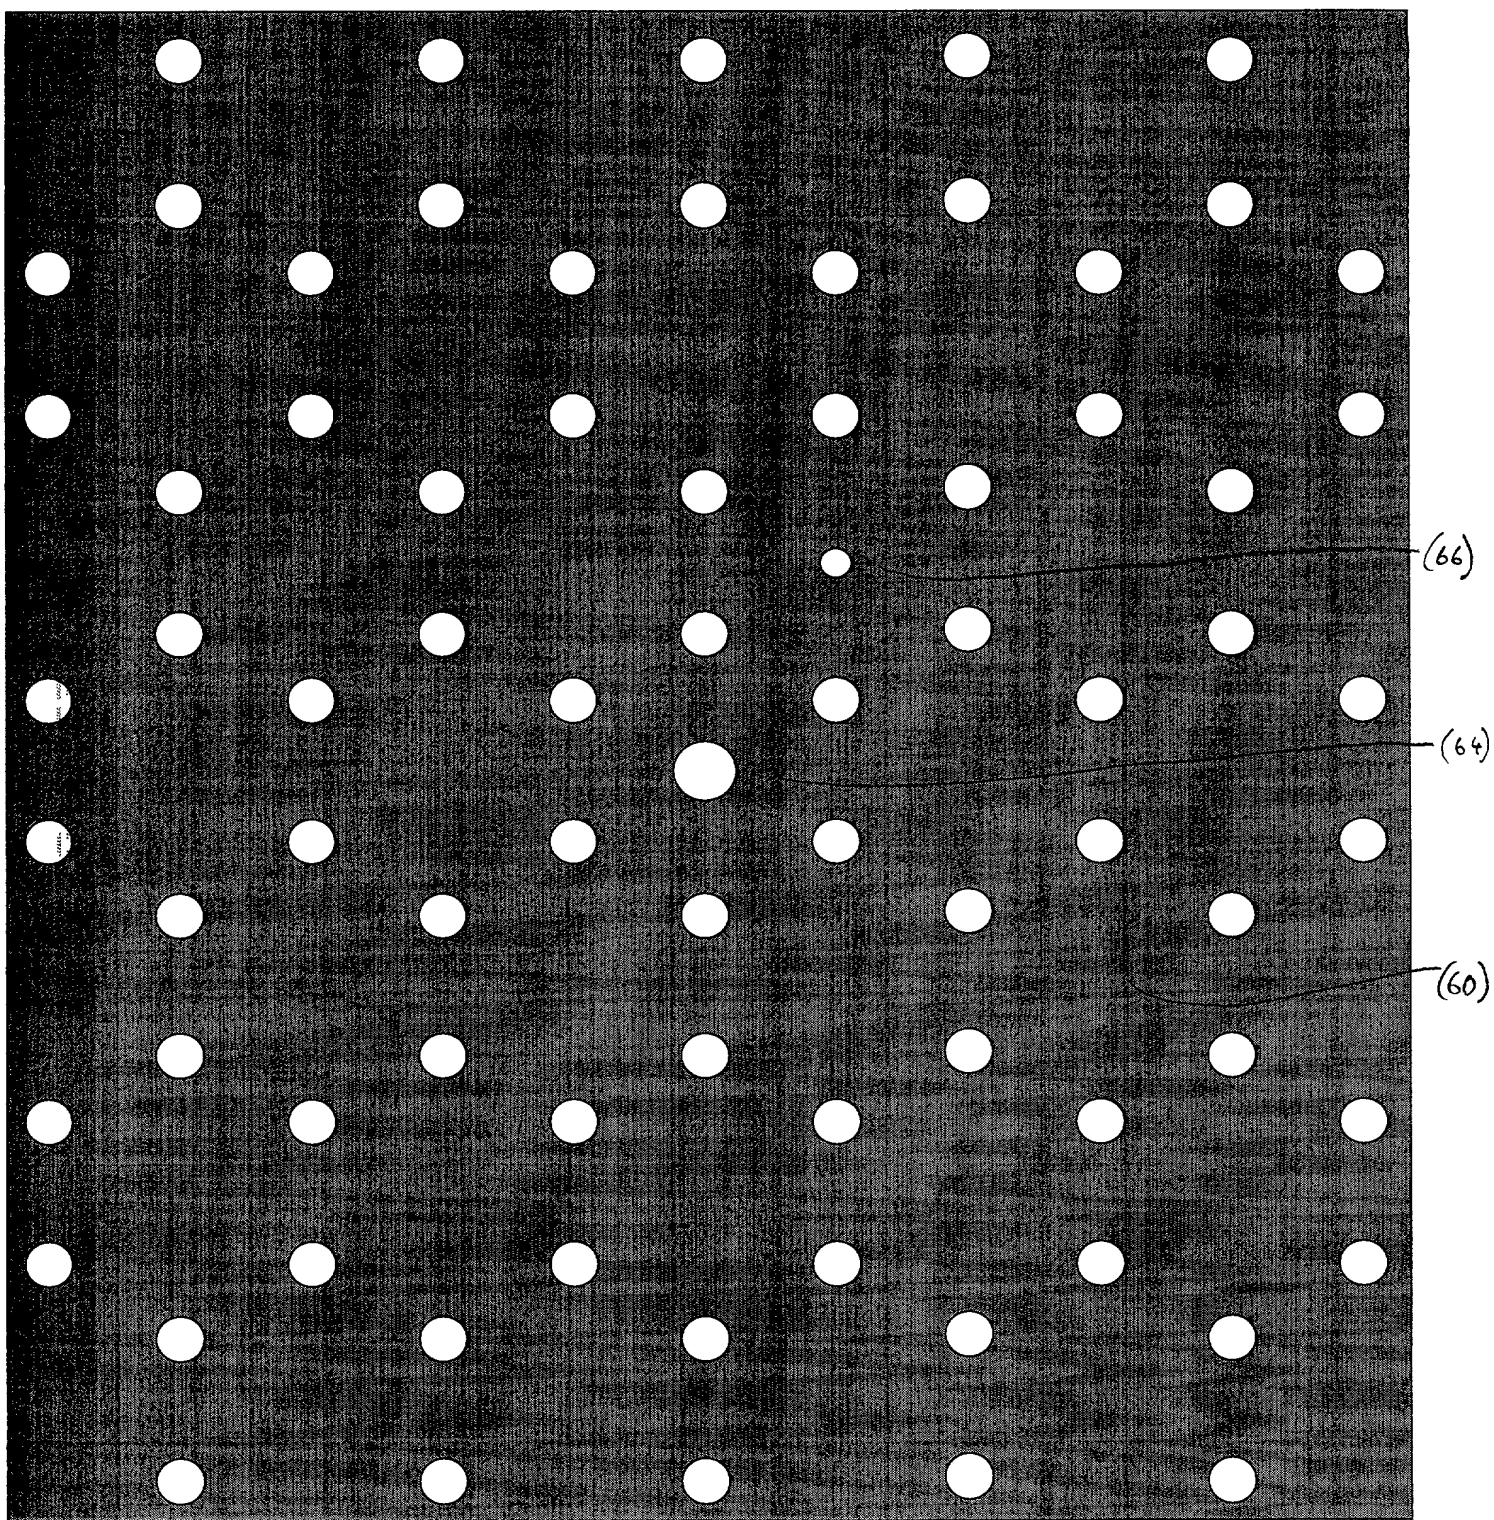


FIG. 54




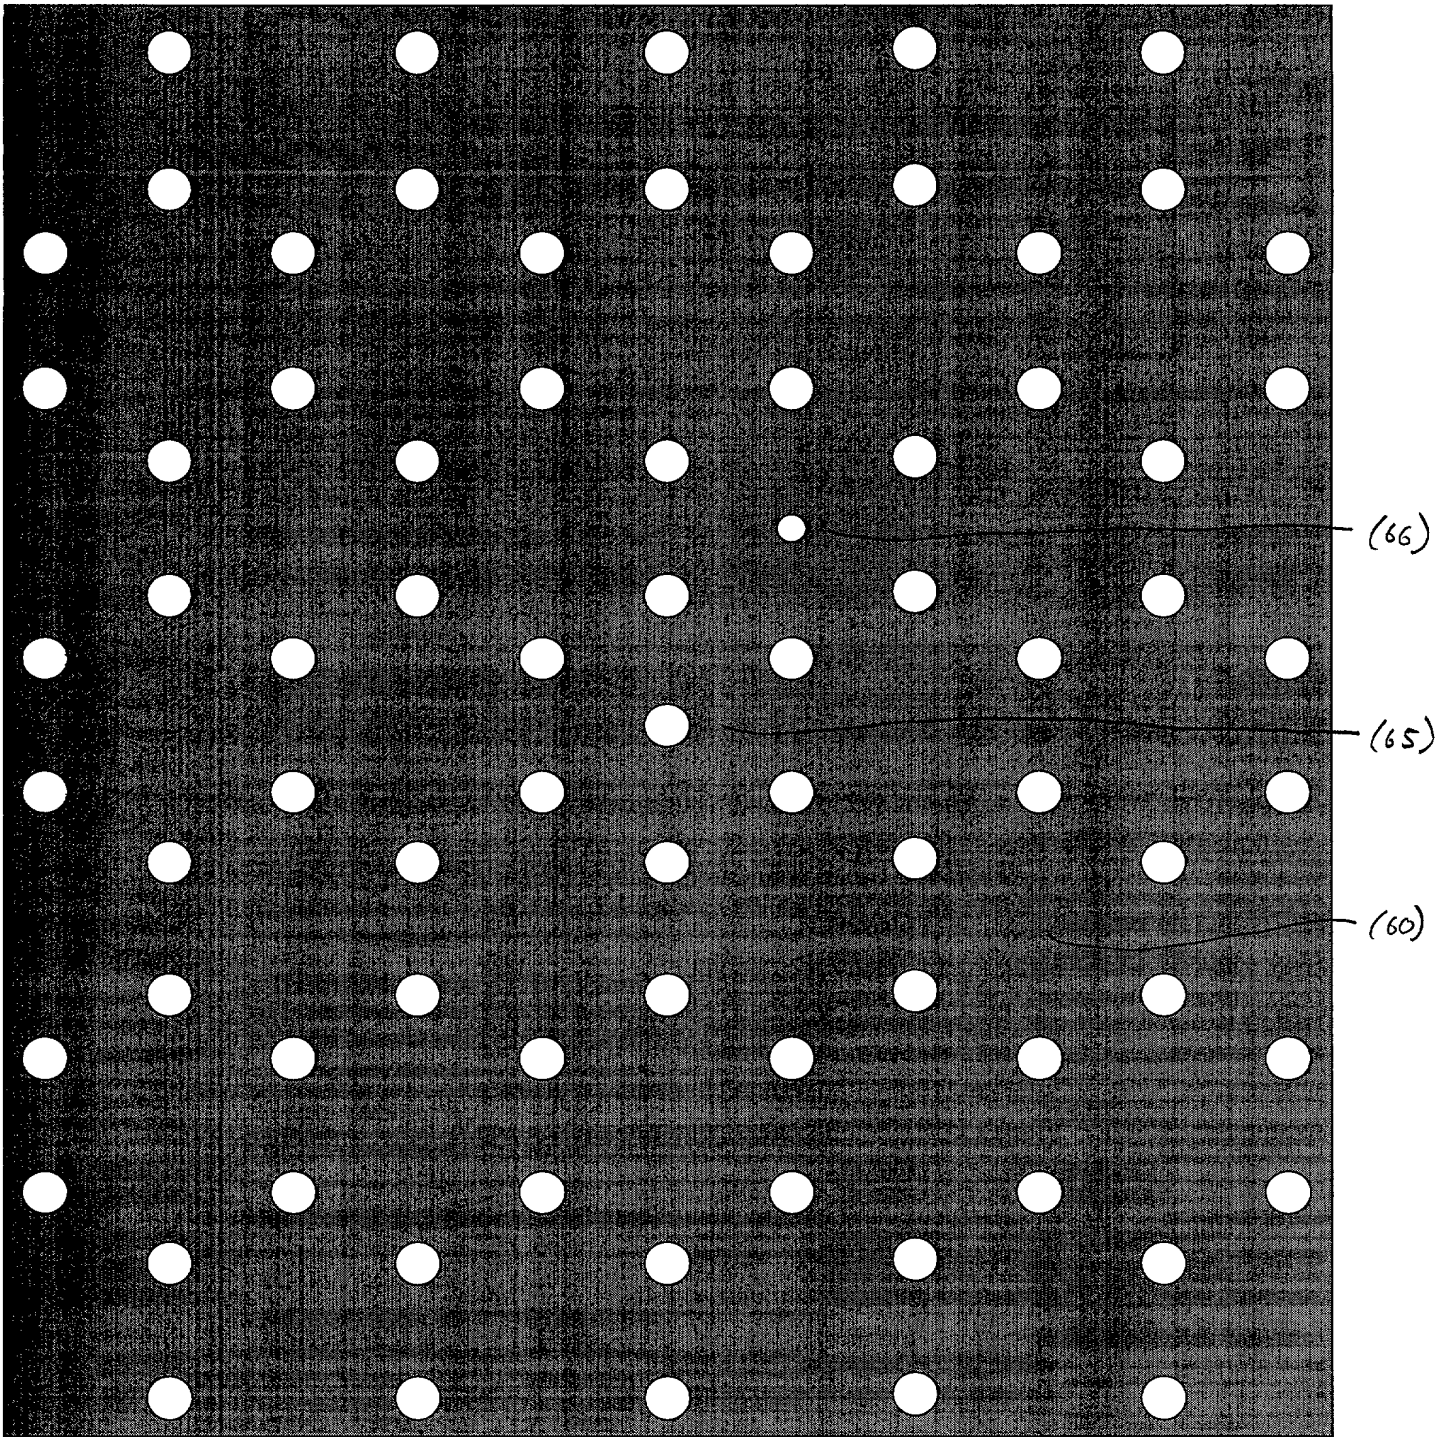


FIG. 55



FIG. 56 is a perspective view of a sheet 60 of material having a grid of holes 62. The sheet 60 is shown in a perspective view, and the holes 62 are arranged in a regular grid pattern. The sheet 60 is shown with a grid of holes 62, and the holes 62 are arranged in a regular grid pattern. The sheet 60 is shown in a perspective view, and the holes 62 are arranged in a regular grid pattern.

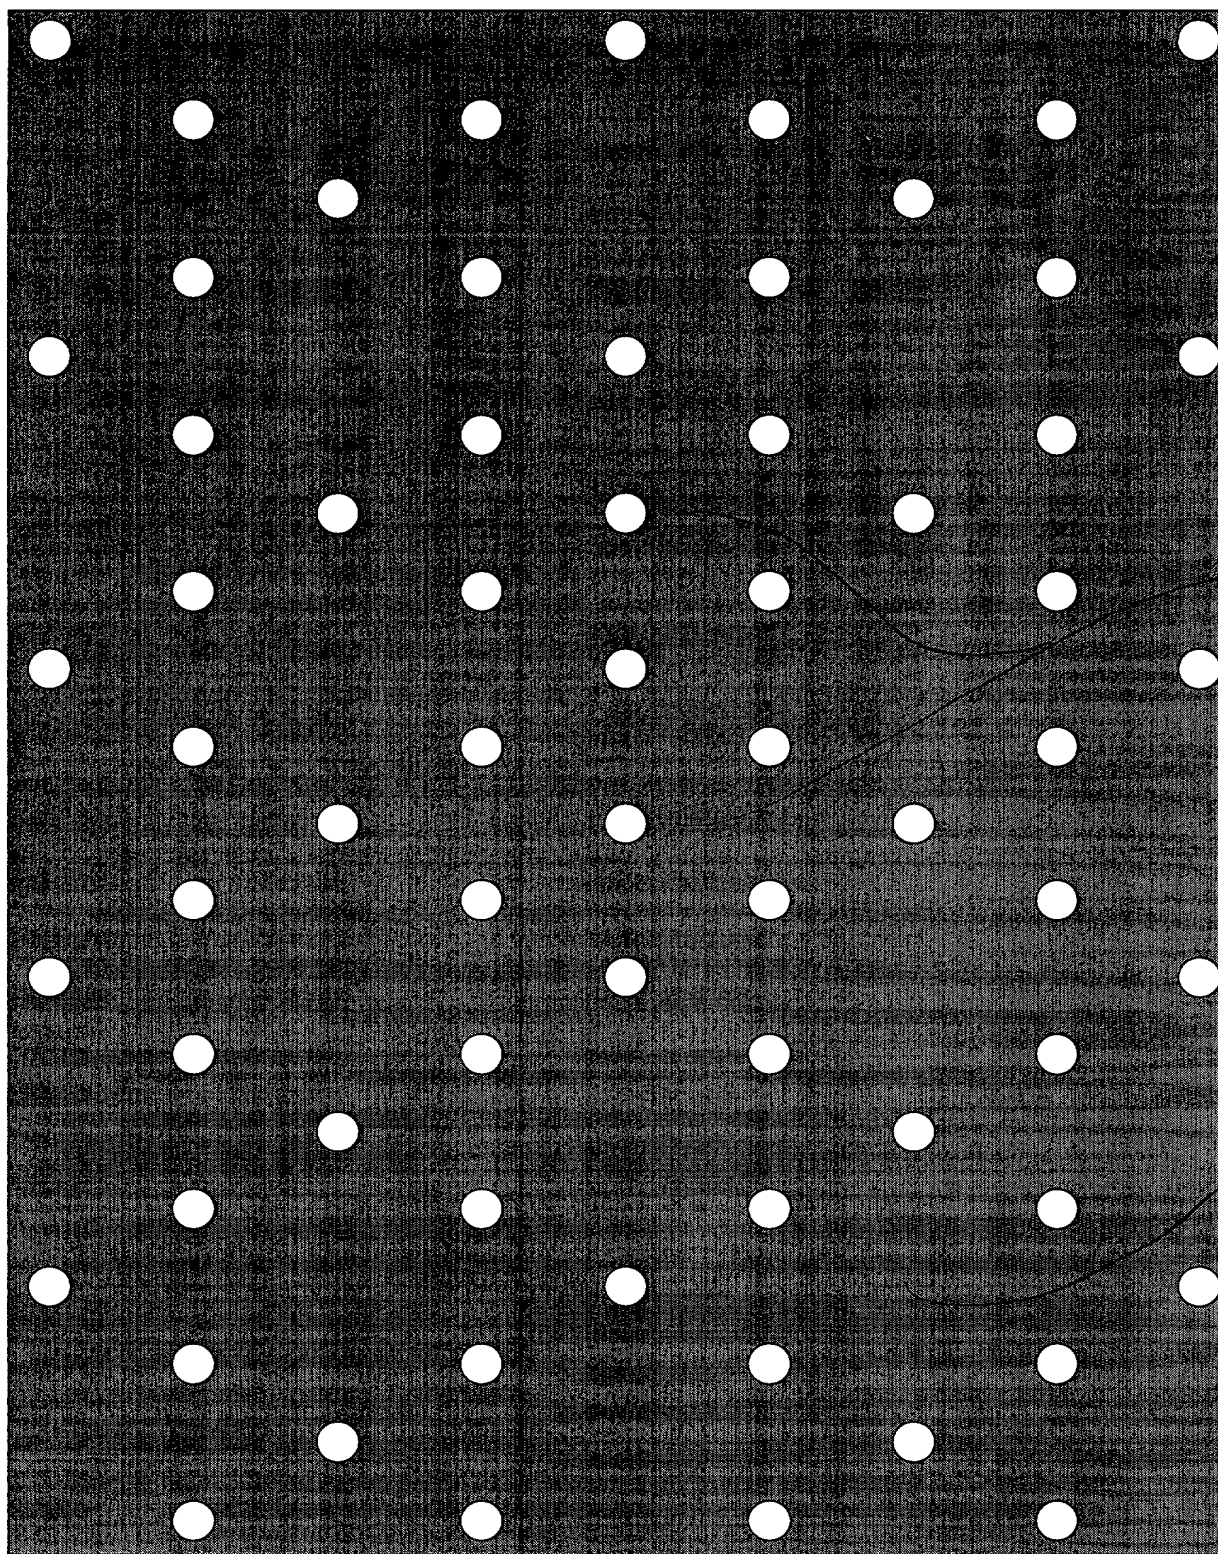

(67)

(68)

FIG. 56



FIG. 52

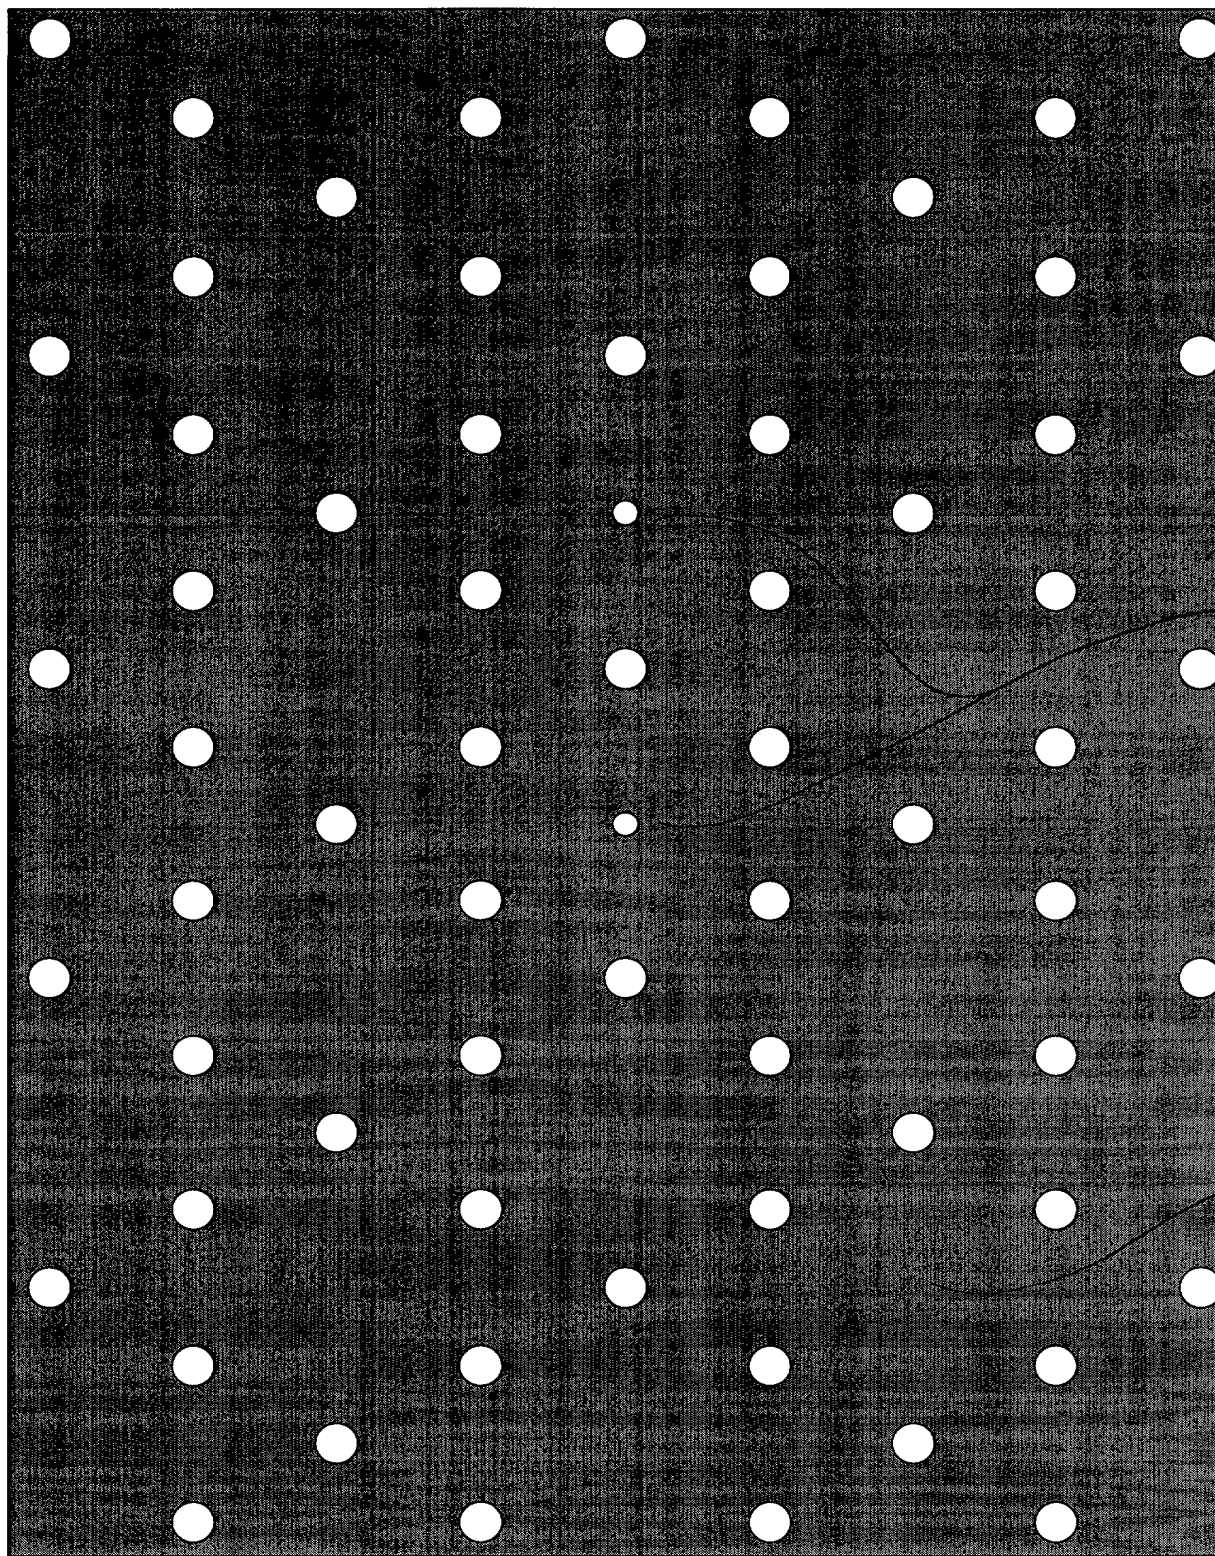


FIG. 52



FIG. 58 is a perspective view of a sheet of material having a grid of circular holes. The sheet is shown in a rectangular shape with a grid of circular holes. The holes are arranged in a regular pattern. The sheet is labeled (68) and (70).

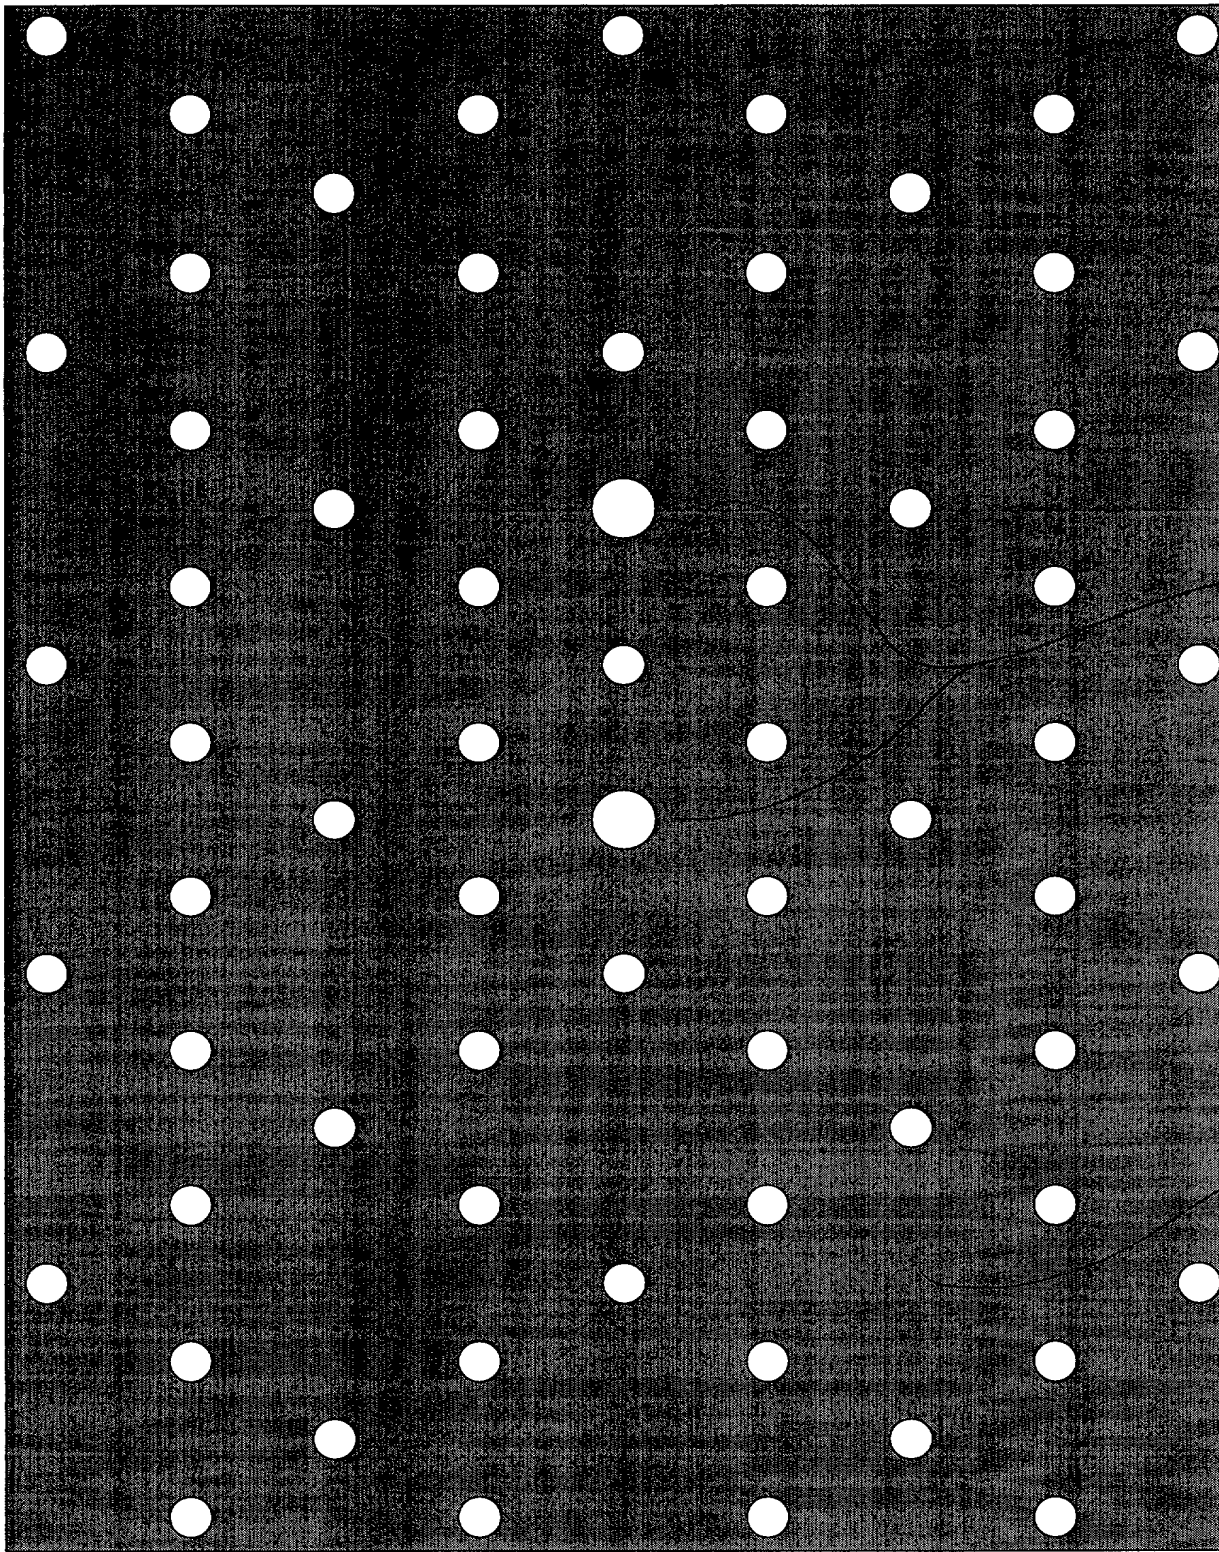


FIG 58



FIG. 59

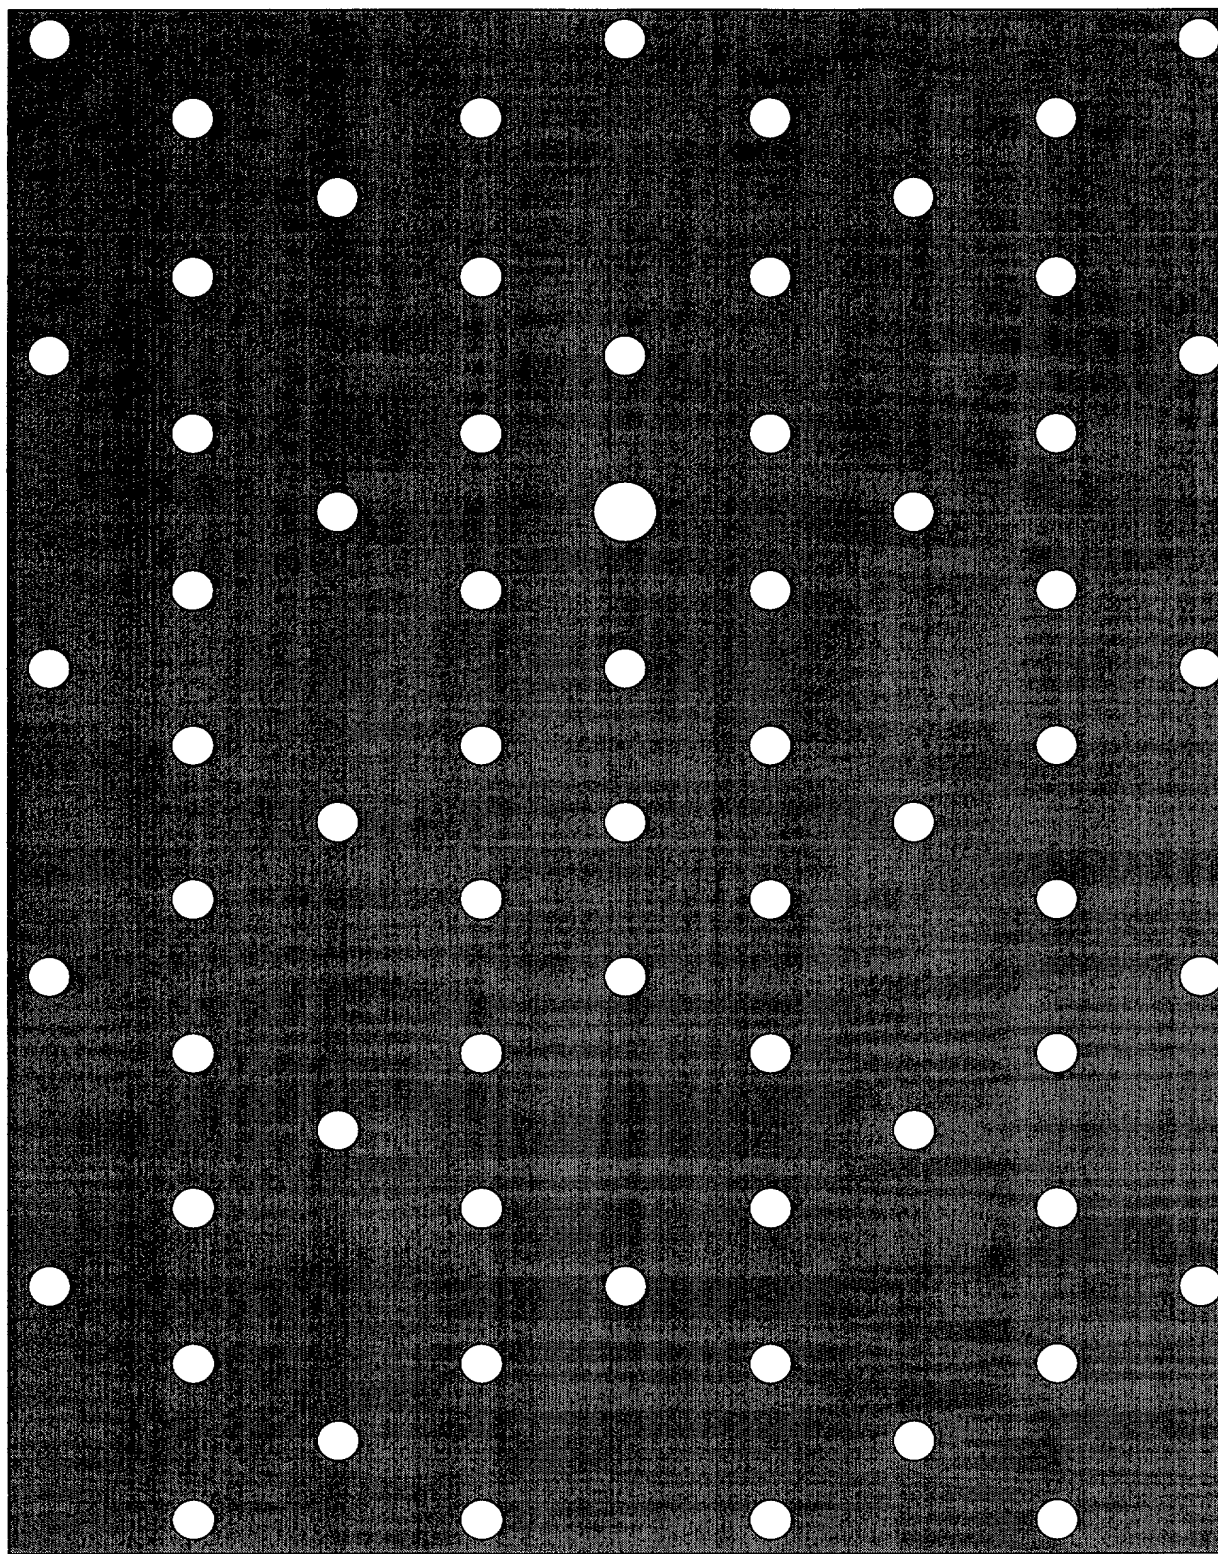


FIG. 59



FIG. 60

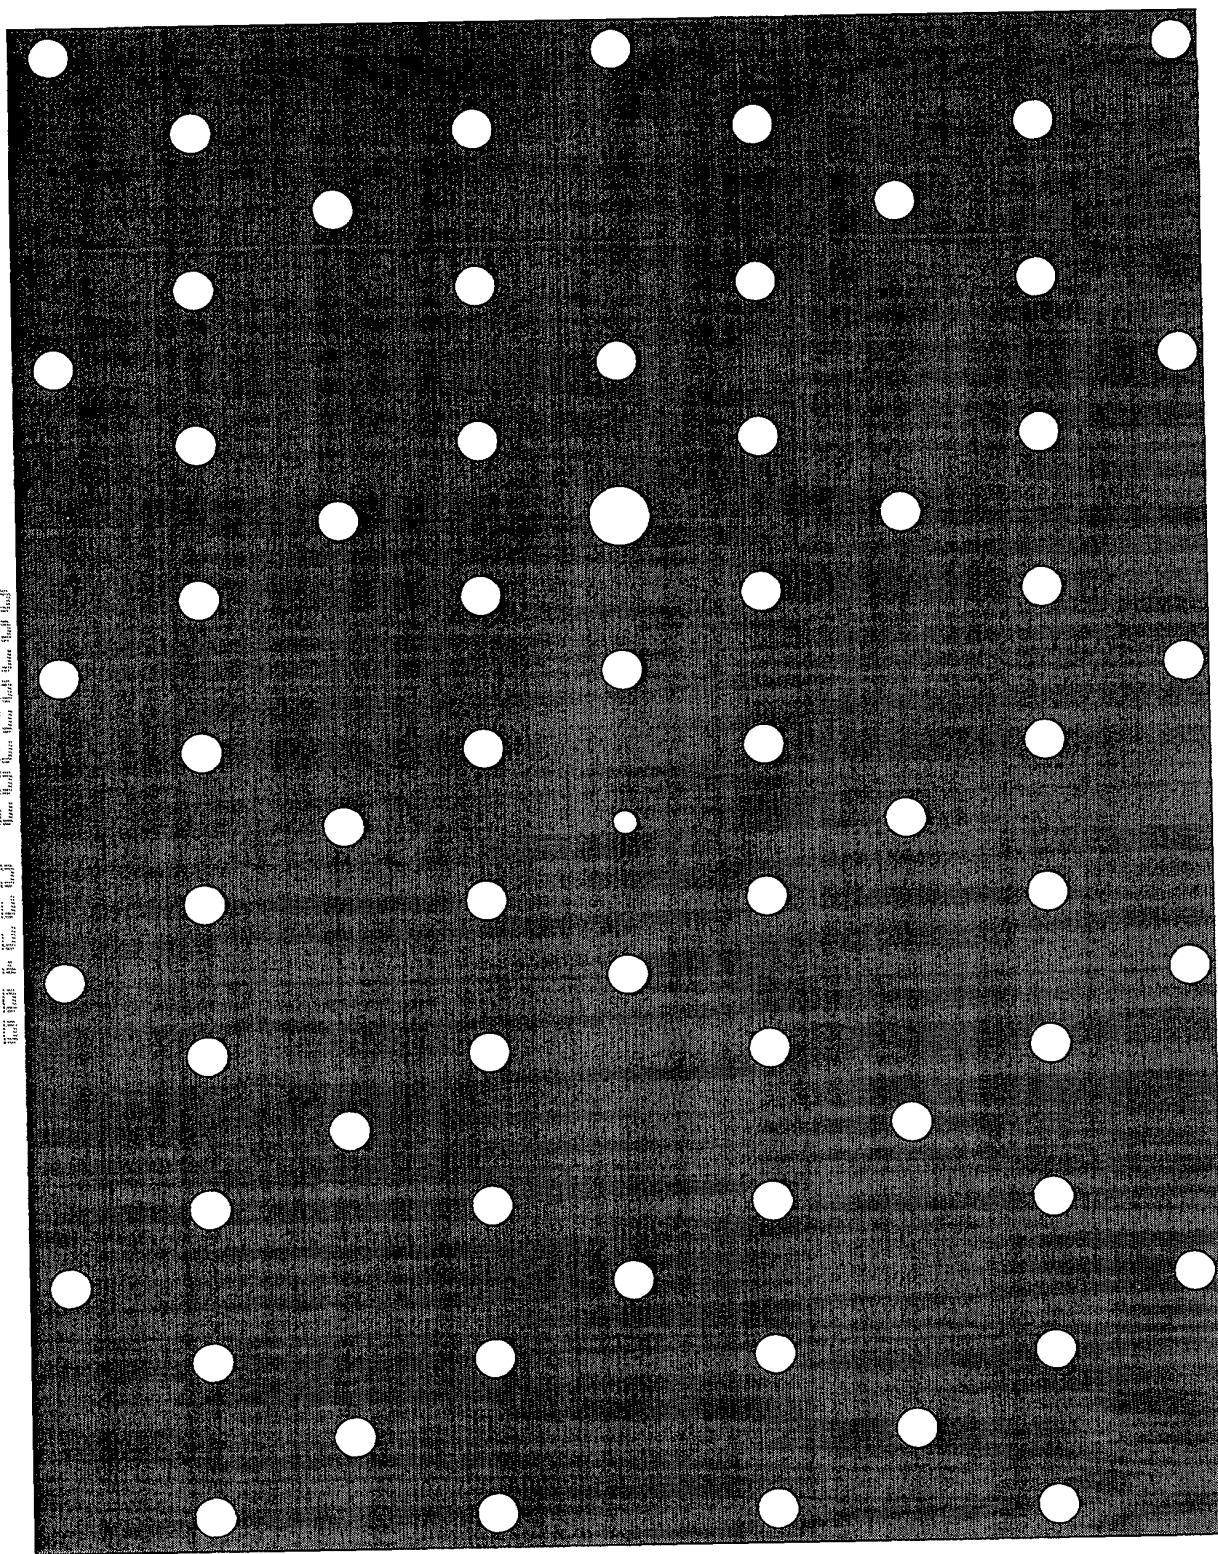


FIG. 60



FIG. 61

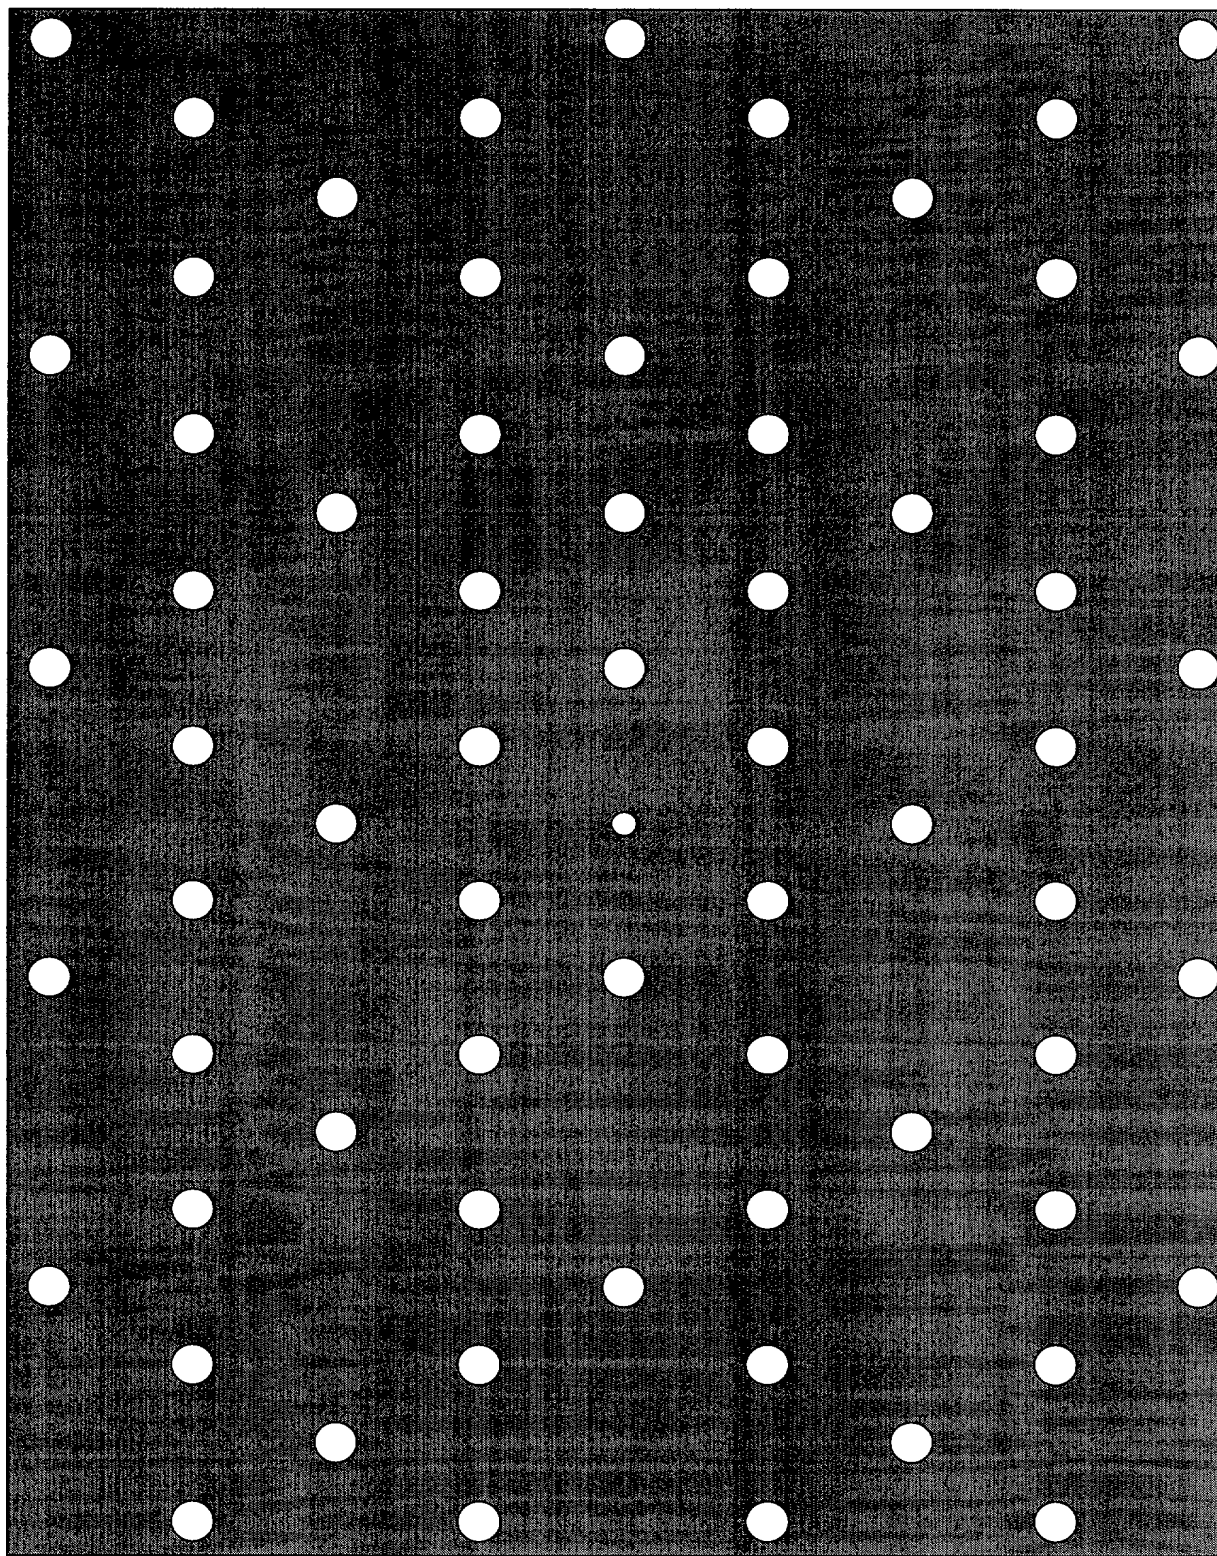


FIG. 61



FIG. 62 is a perspective view of a sheet 62 of material having a grid of circular apertures 63. The sheet 62 is shown in a folded state, with the fold line 64 indicated. The apertures 63 are arranged in a regular grid pattern. The sheet 62 is shown in a perspective view, with the fold line 64 indicated. The apertures 63 are arranged in a regular grid pattern.

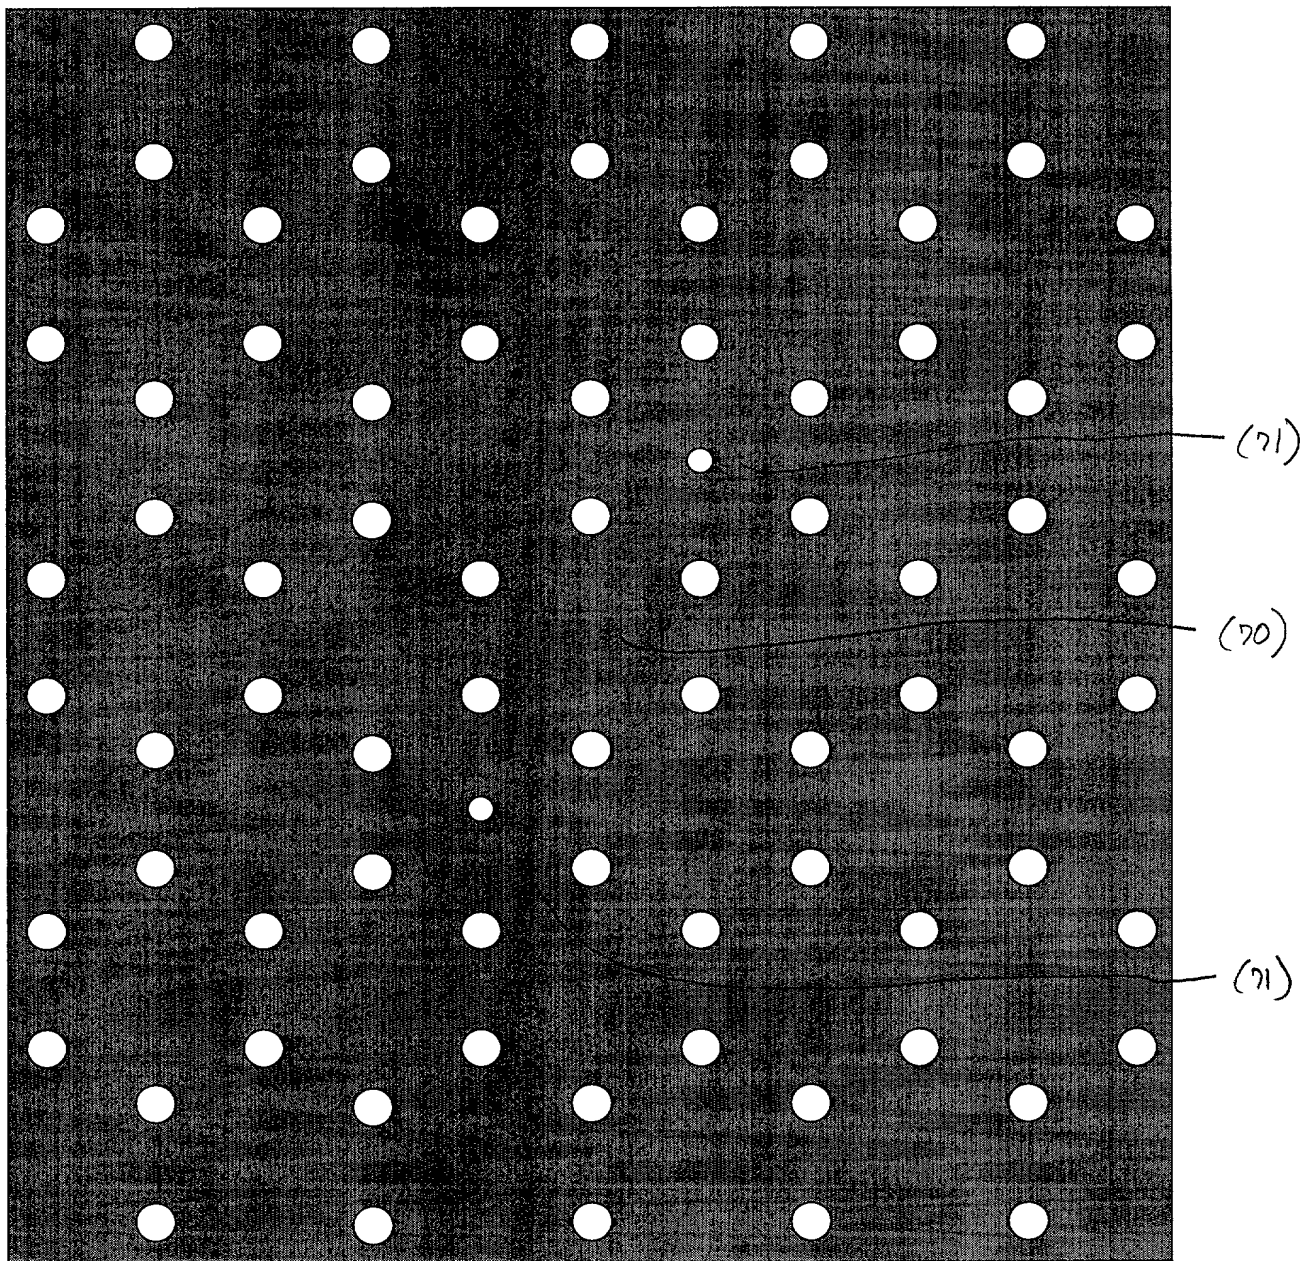


FIG 62



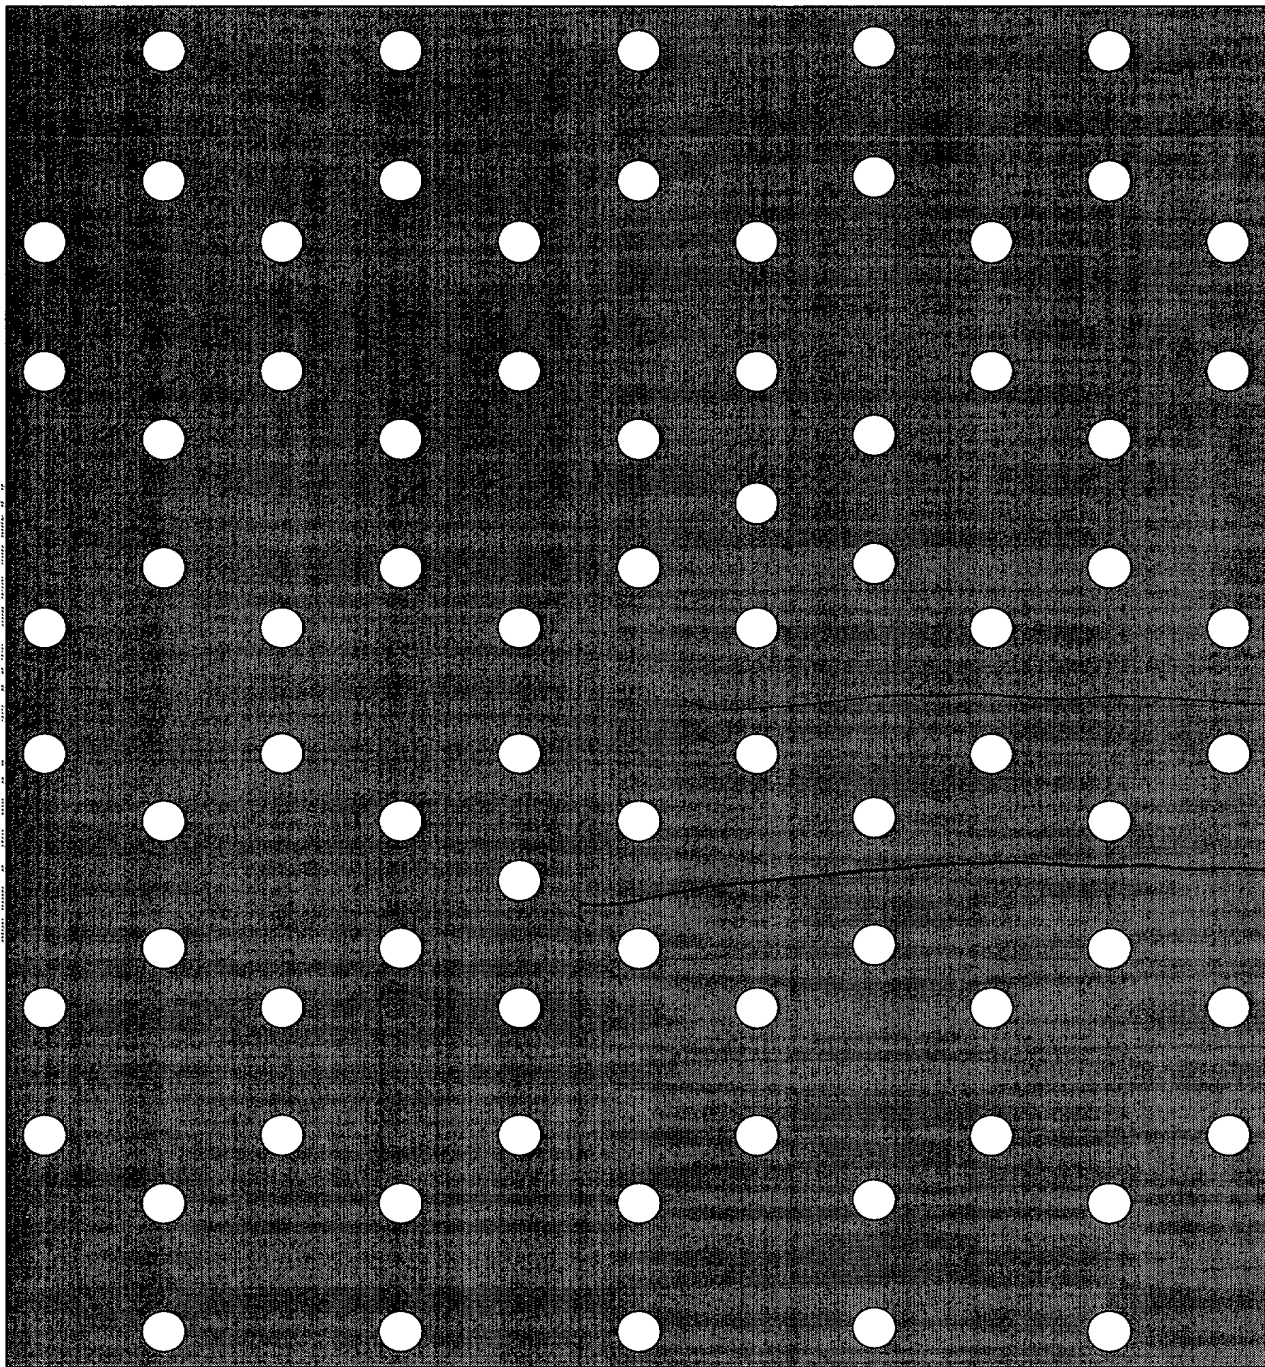


FIG. 63



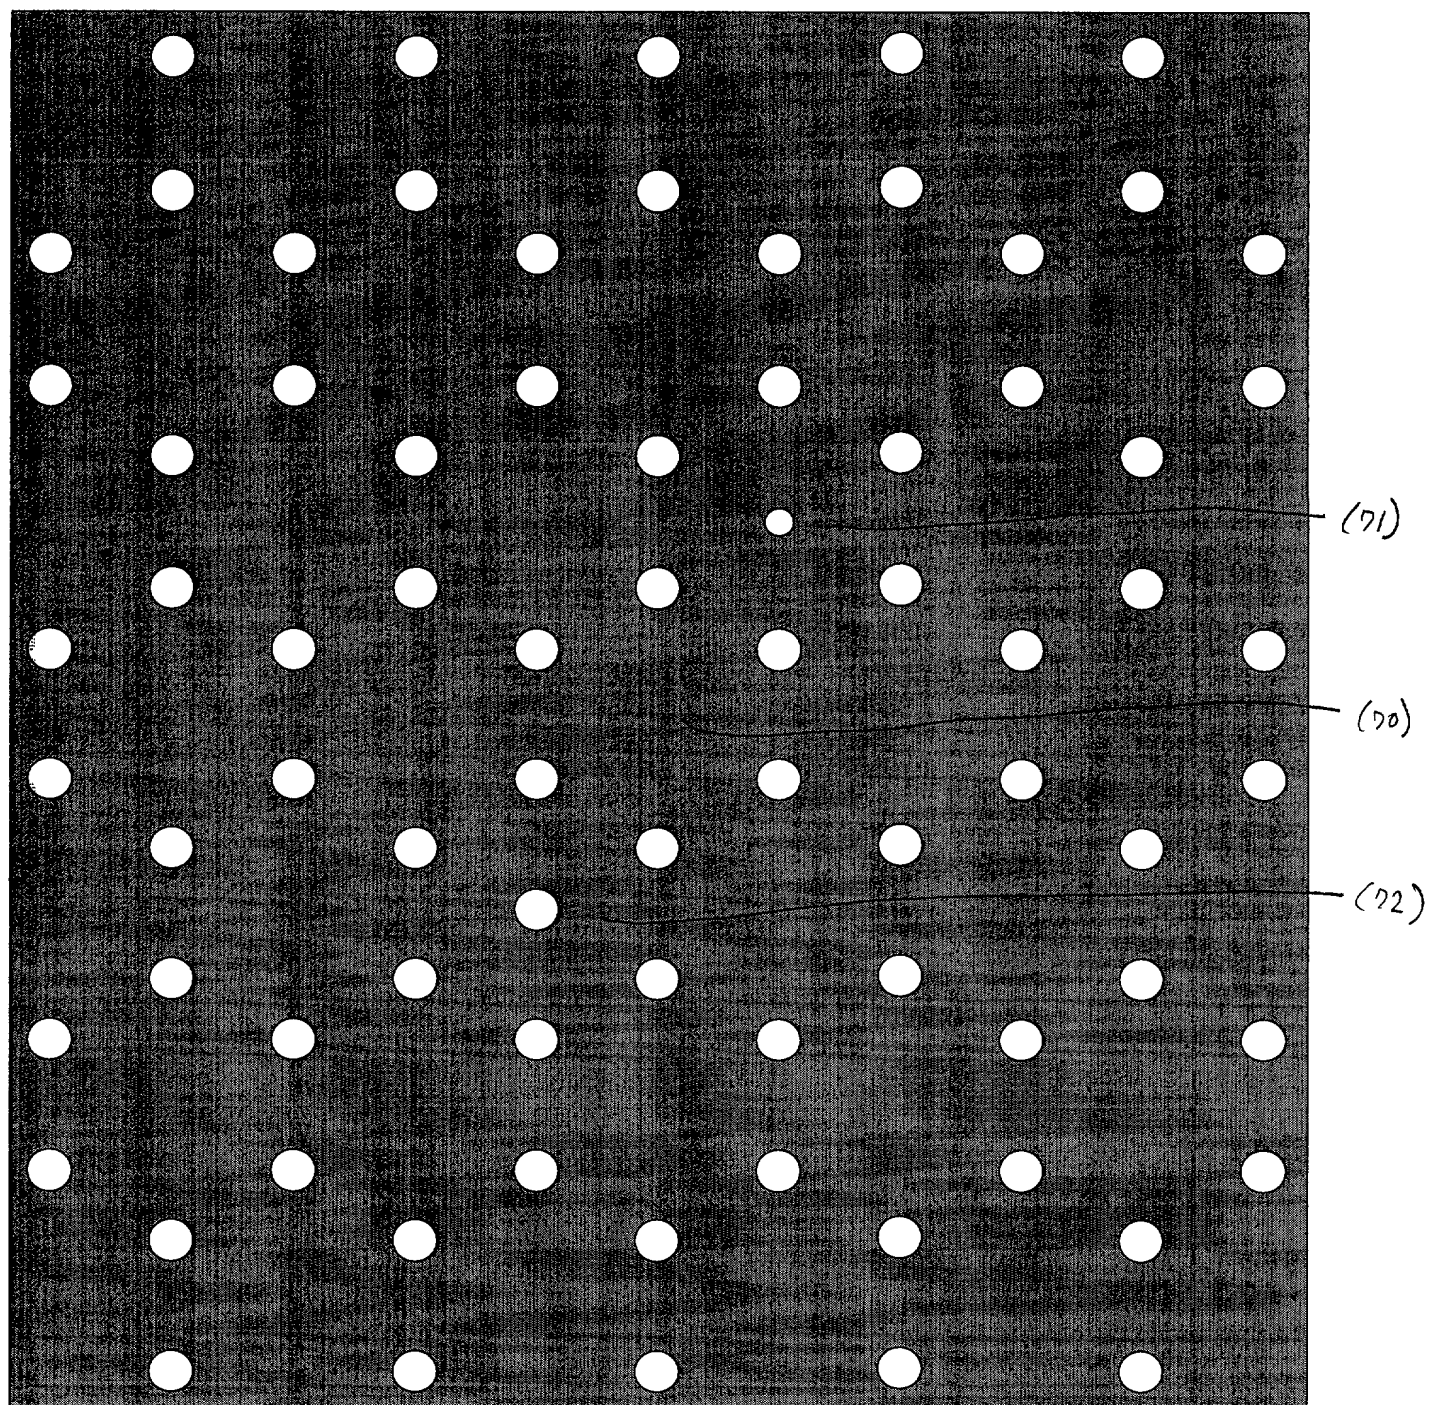


FIG. 64



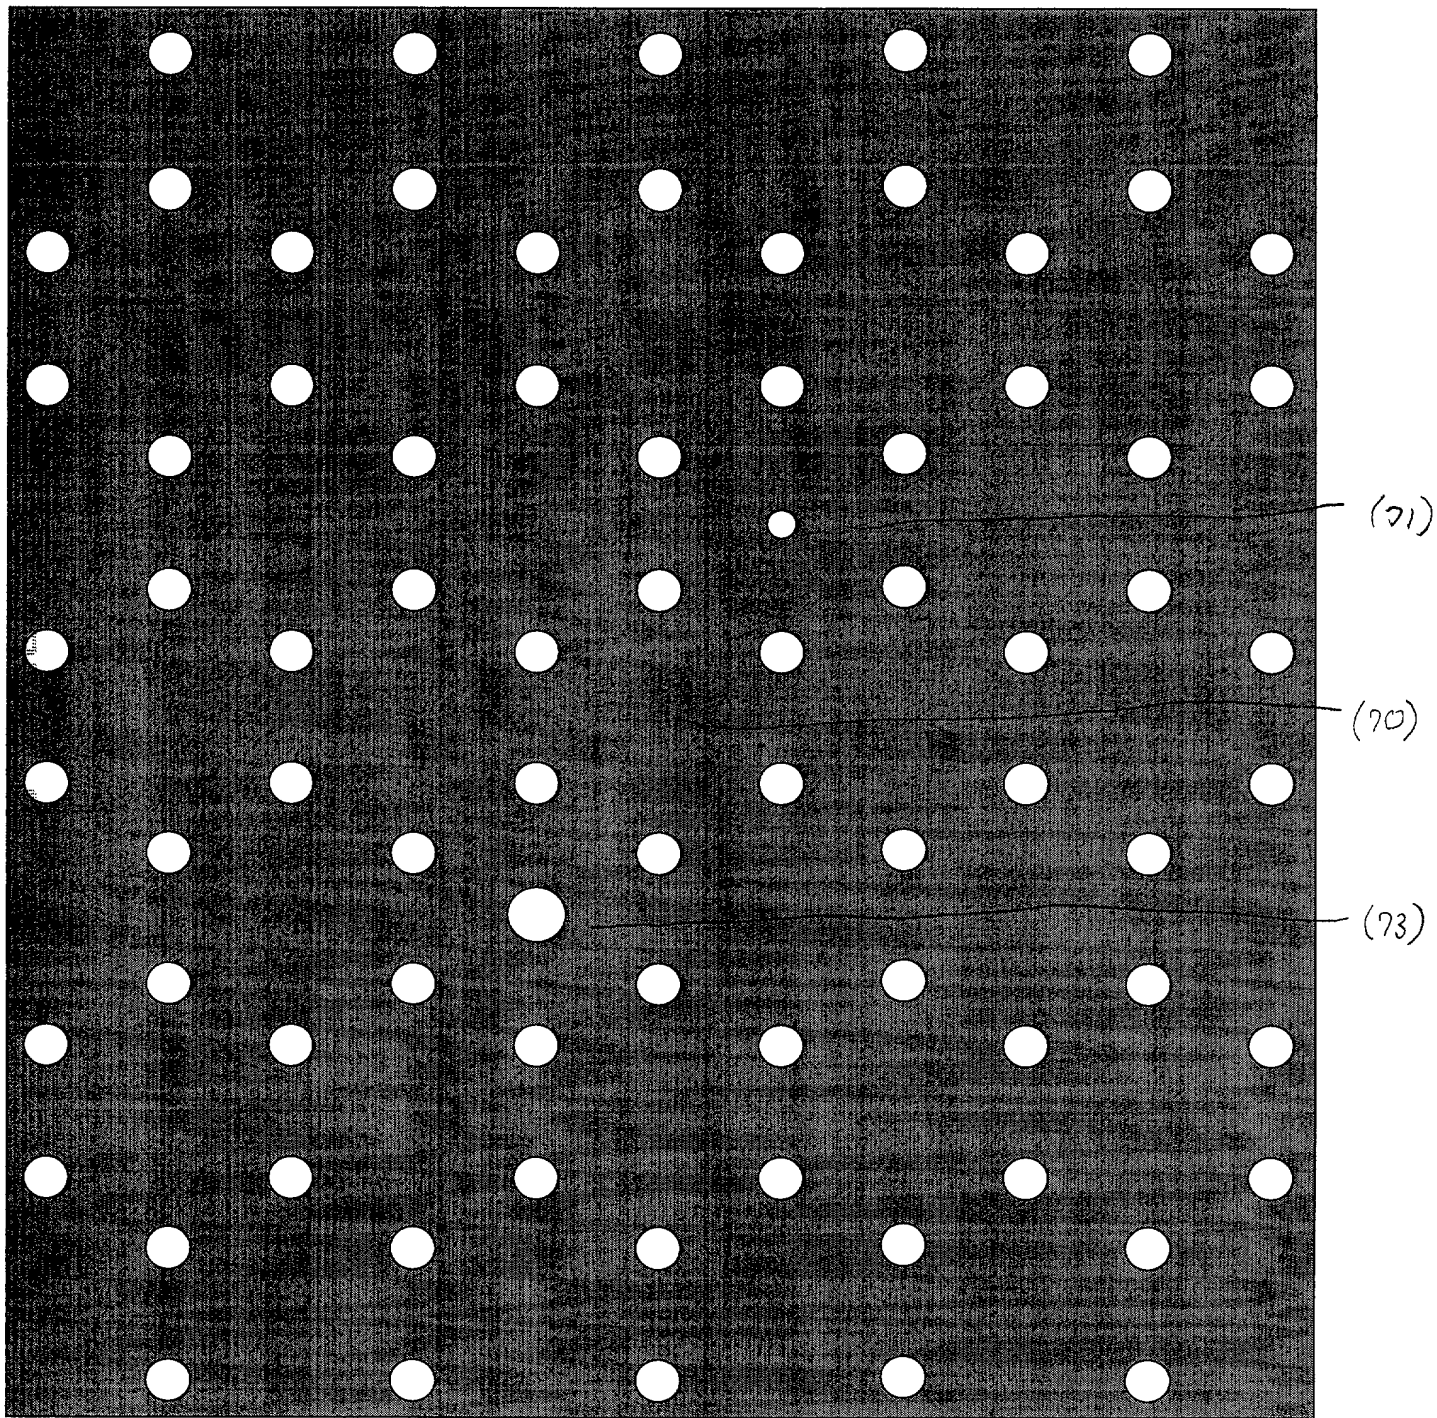


FIG. 65



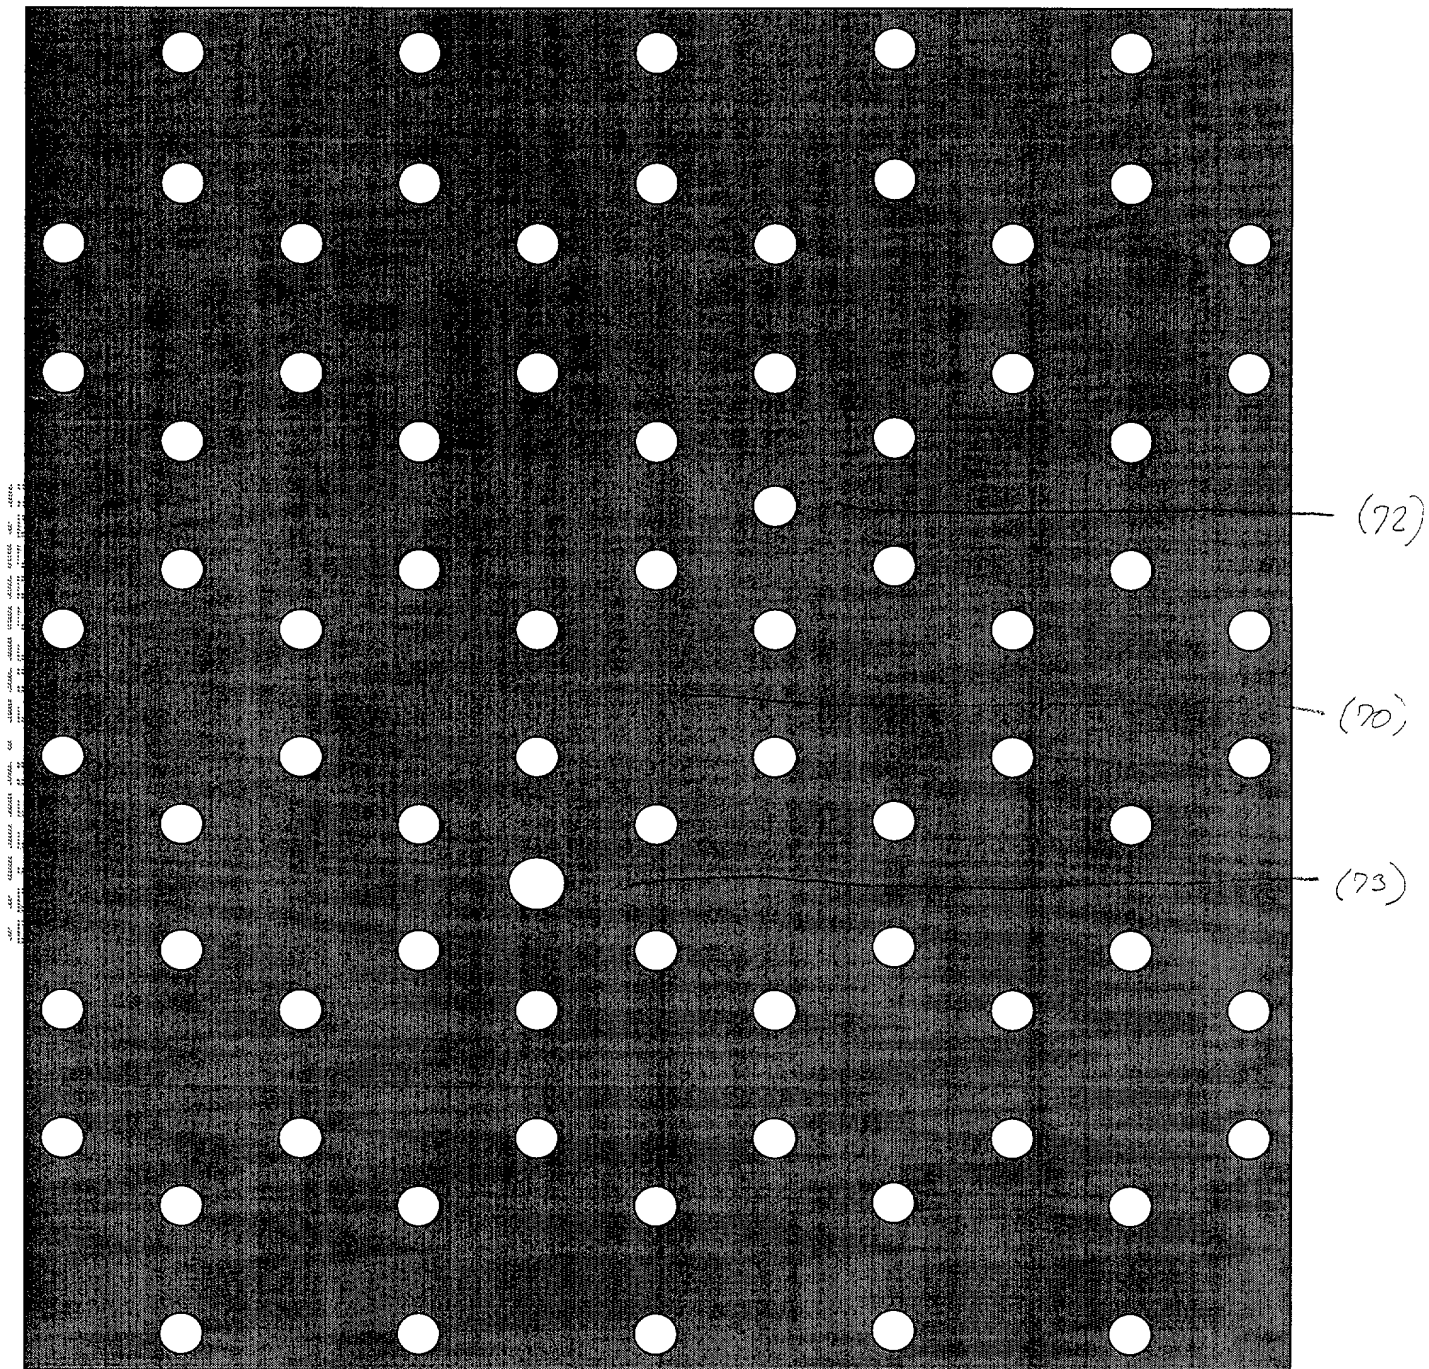


FIG. 66



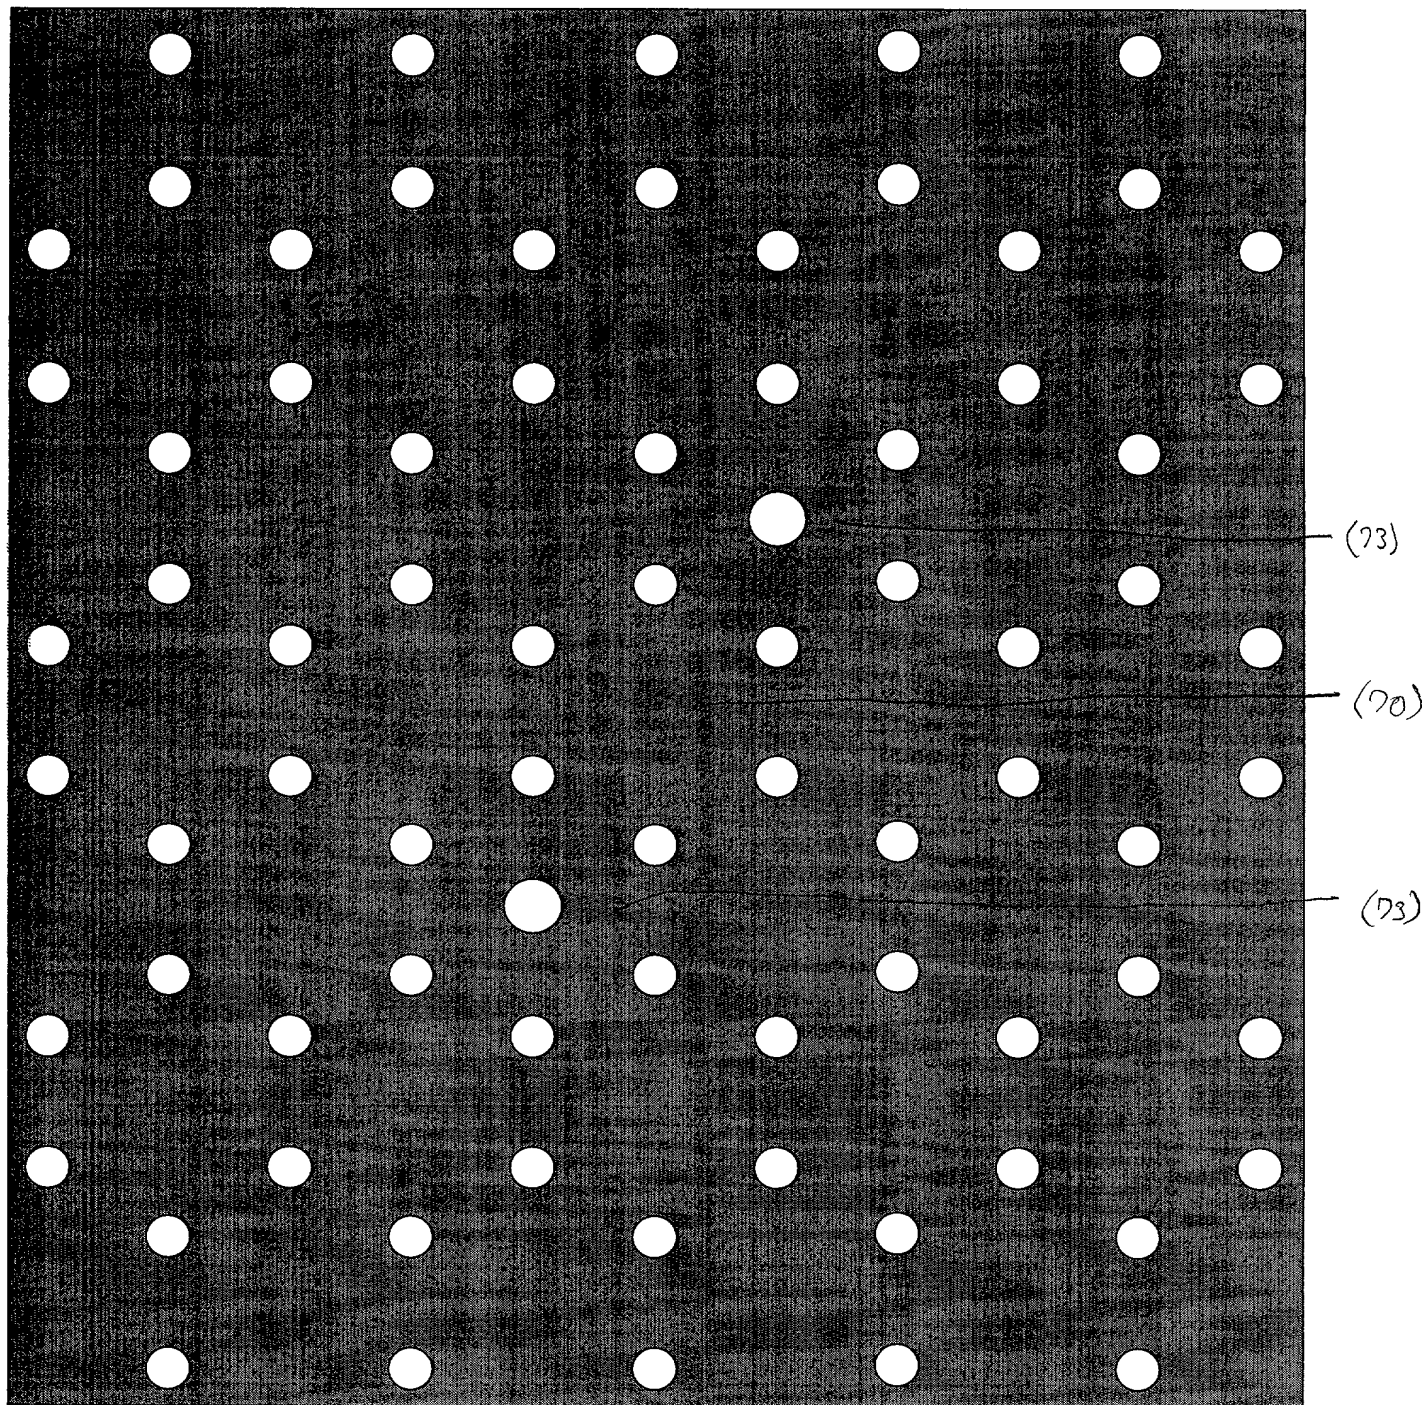


FIG. 62



FIG. 68

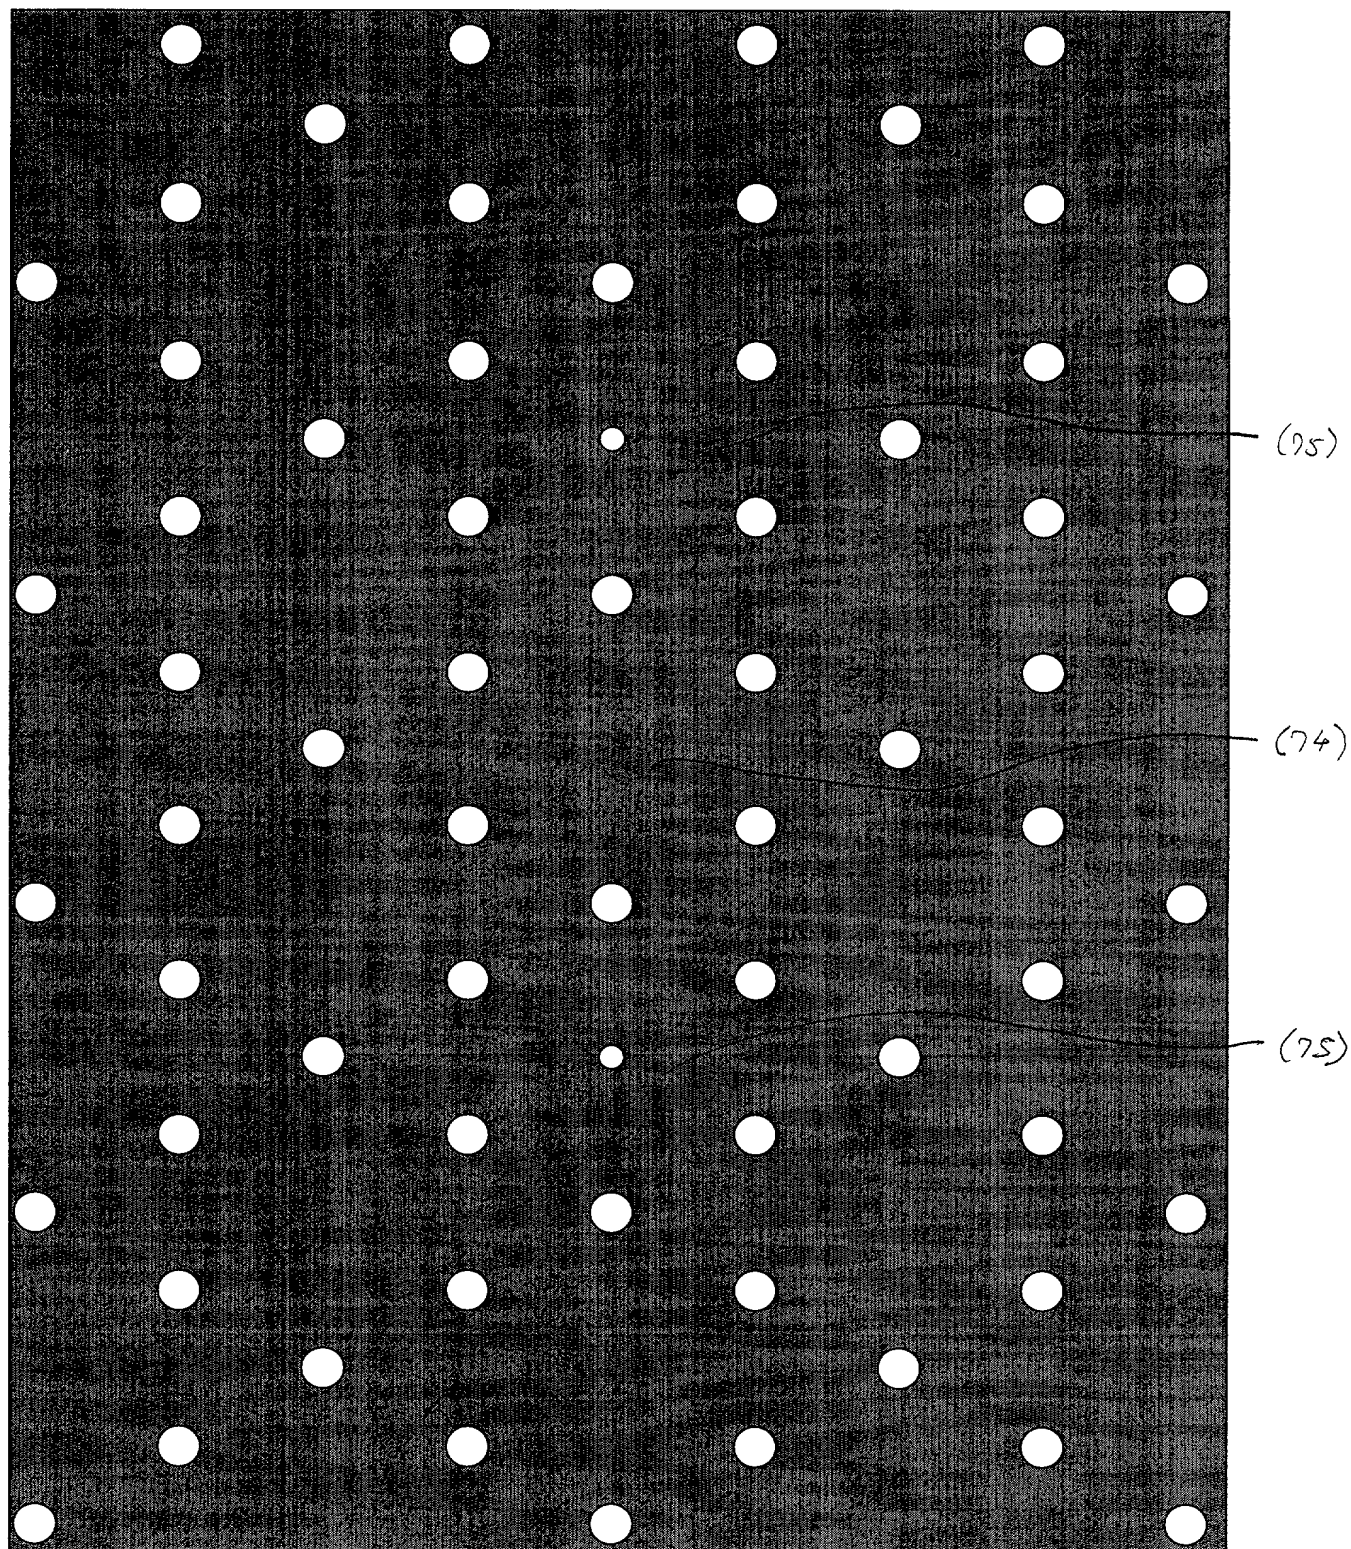


FIG. 68



FIG. 69 is a perspective view of a sheet of material having a grid of holes. The sheet is shown in a perspective view, and the holes are arranged in a regular grid pattern. The sheet is labeled with the number 74 in the upper right corner. The holes are labeled with the number 76 in the lower right corner.

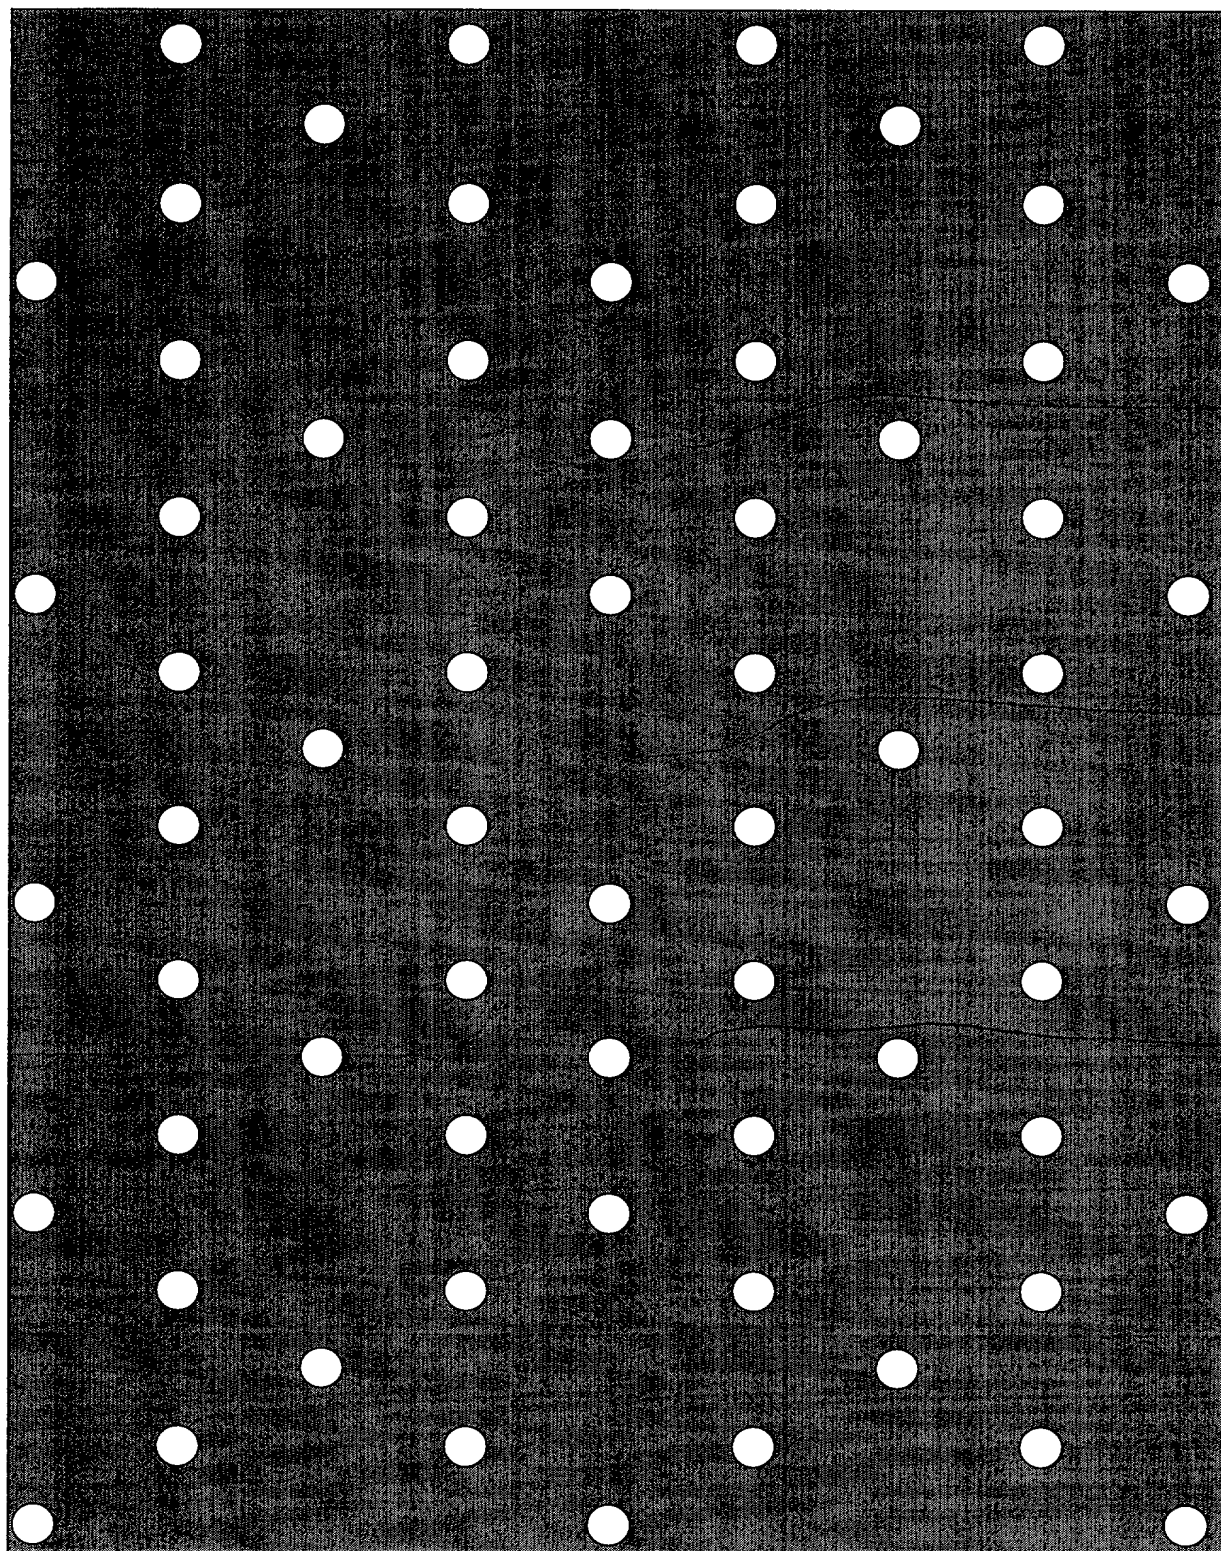


FIG. 69



FIG. 20

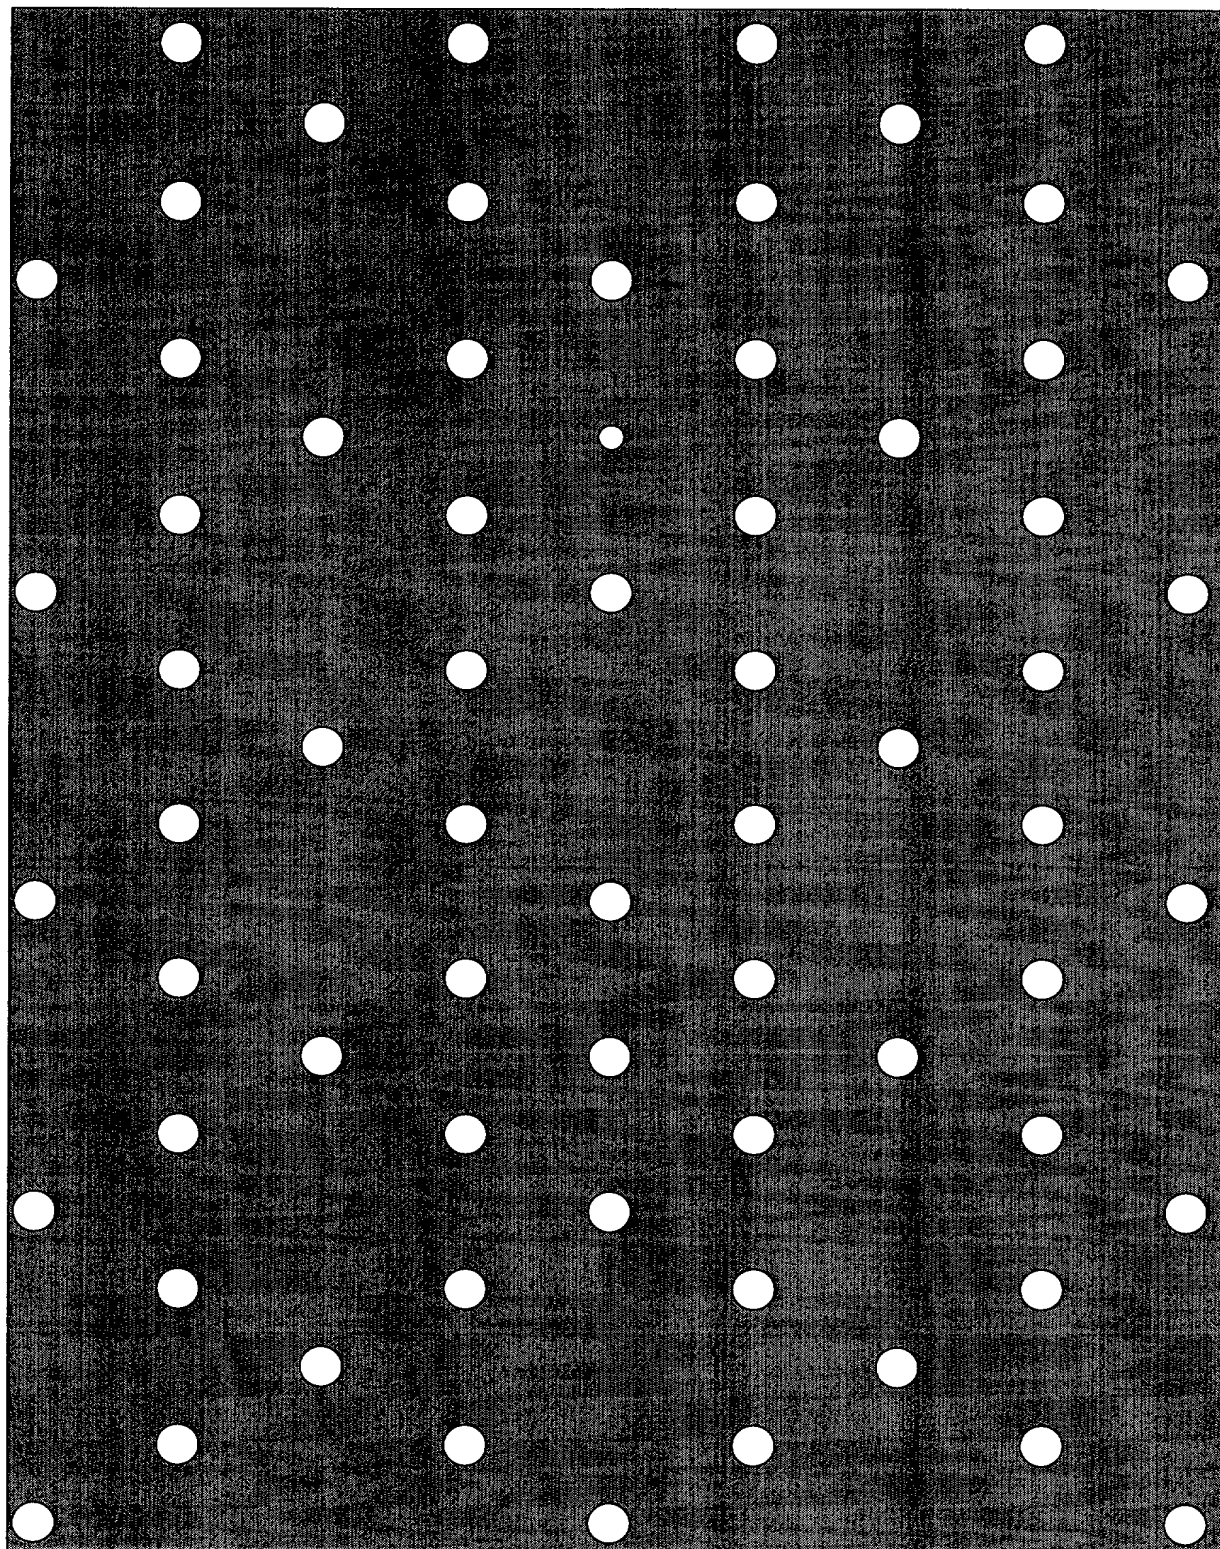


FIG 20



U.S. GOVERNMENT PRINTING OFFICE: 1964

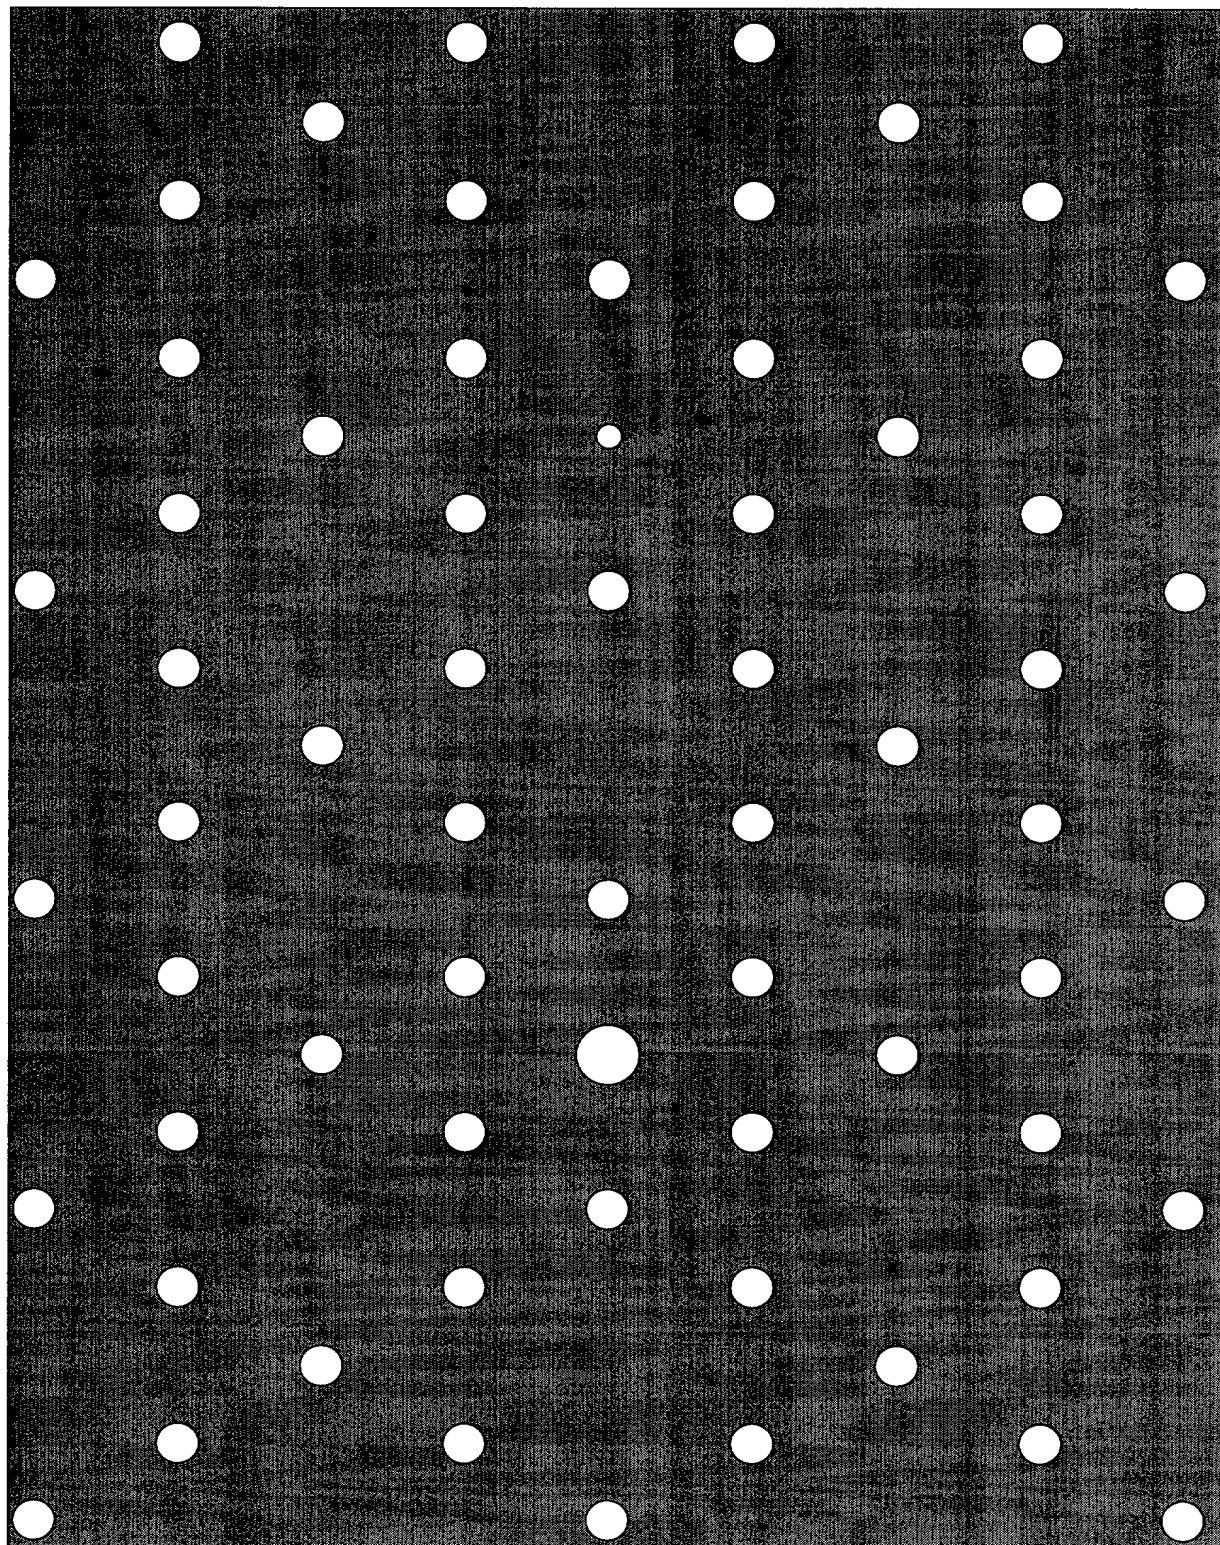


FIG. 71



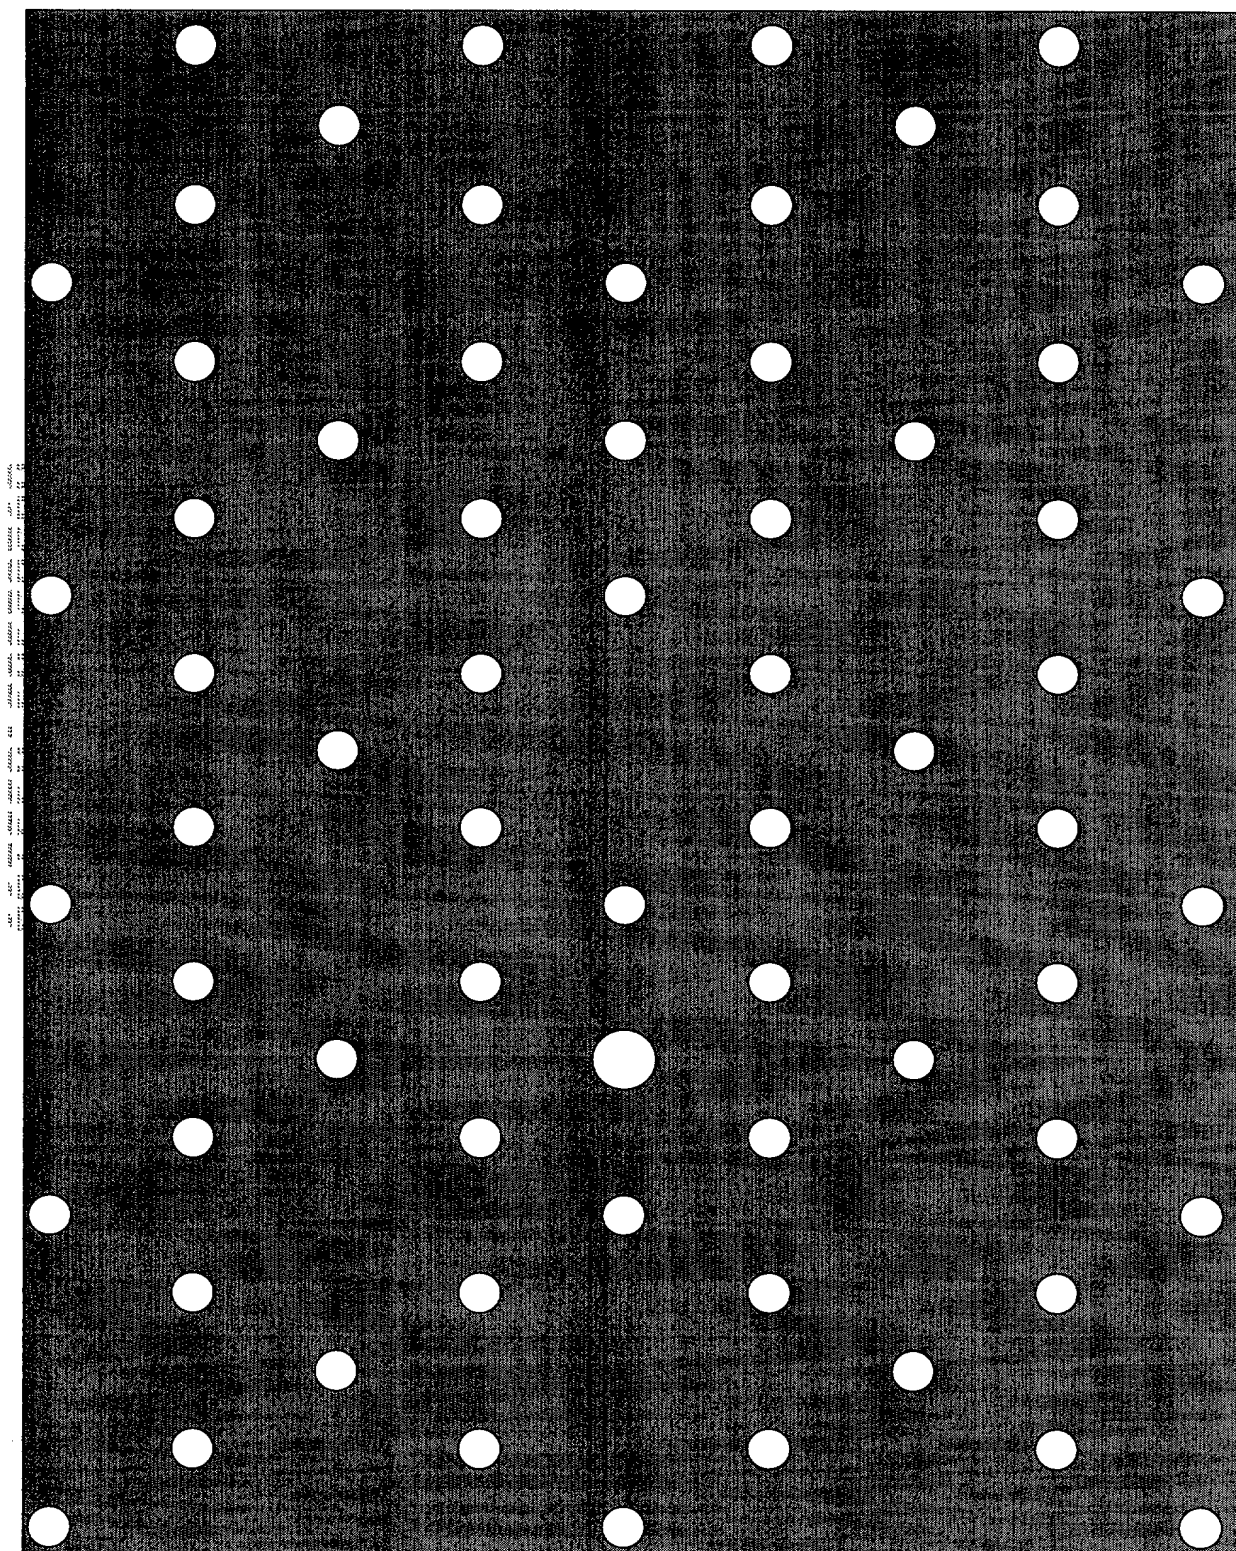


FIG. 72



FIG. 23

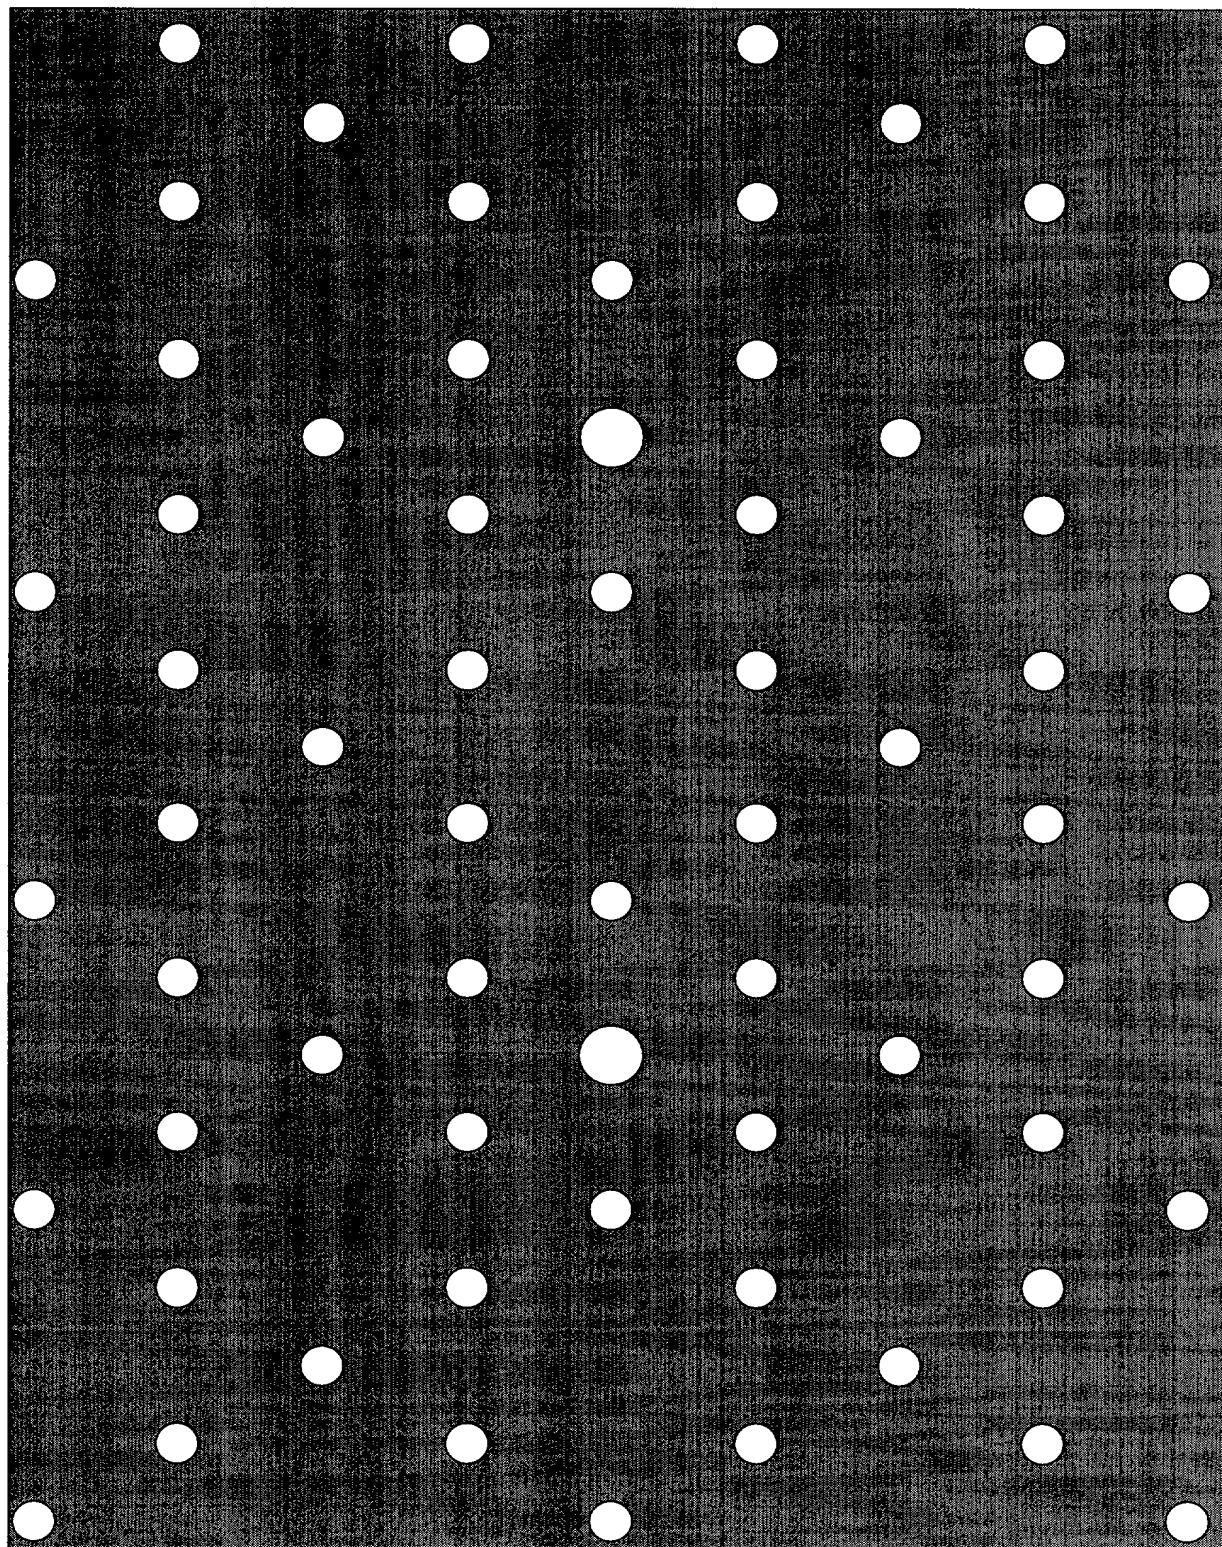


FIG. 23



FIG. 74

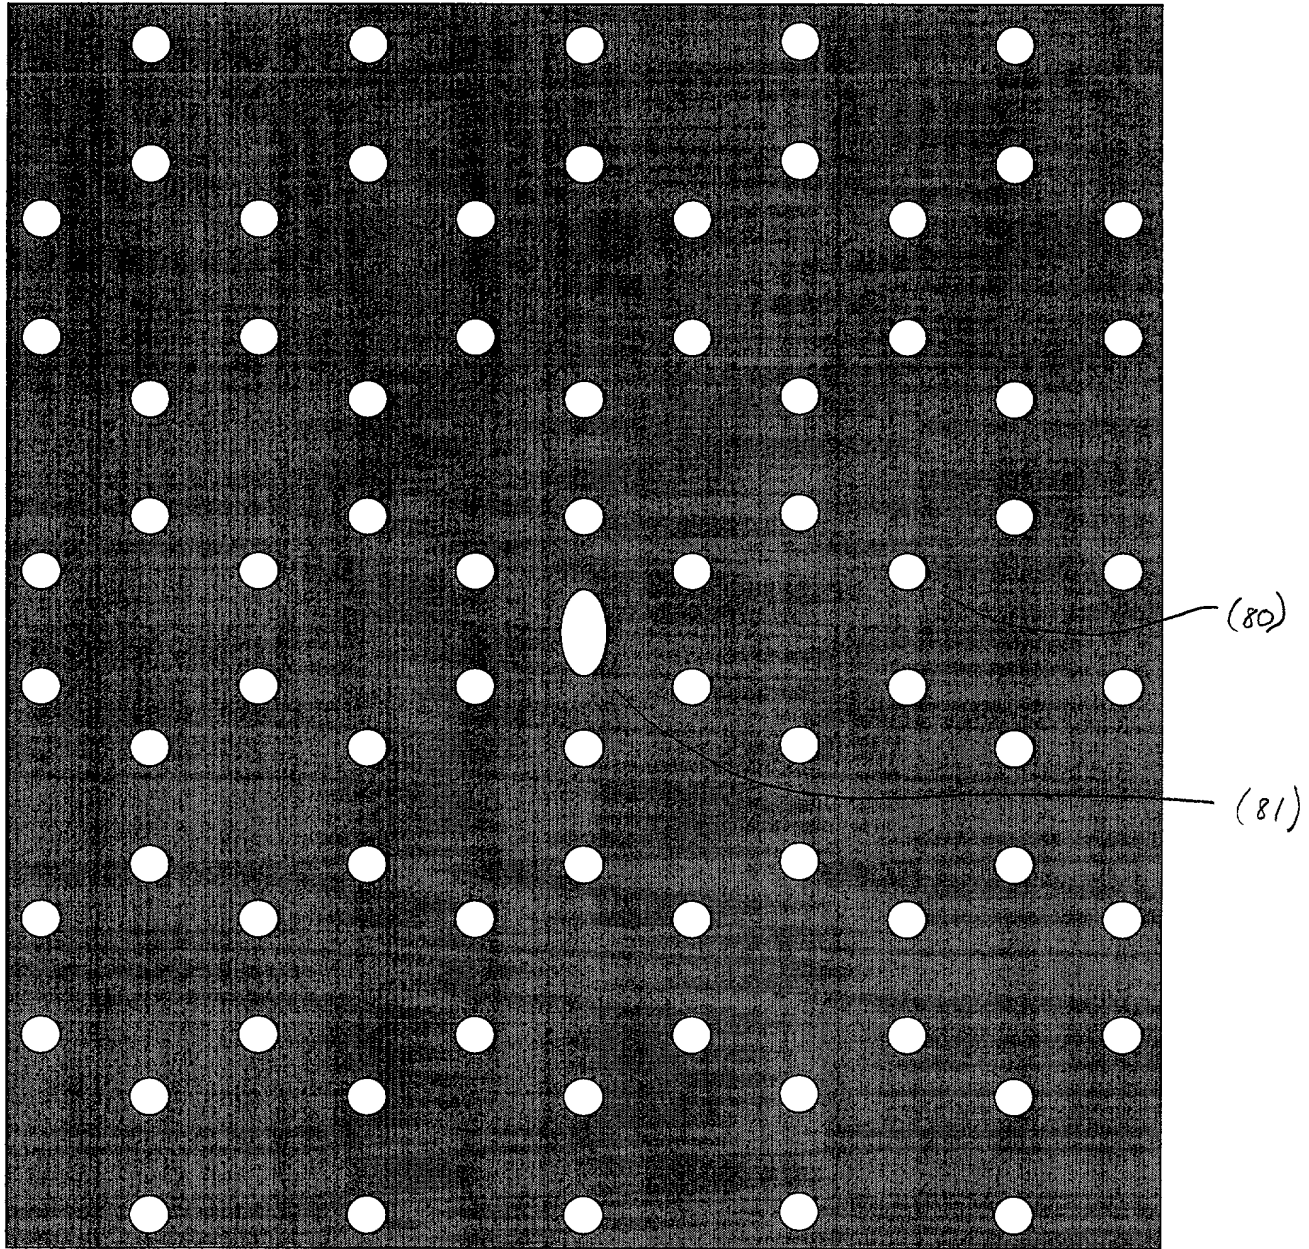


FIG. 74



FIG. 75 is a perspective view of a sheet of material having a grid of circular apertures. The sheet is shown in a folded state, with the fold line indicated by a dashed line. The apertures are arranged in a regular grid pattern. The sheet is labeled (80) and the apertures are labeled (82).

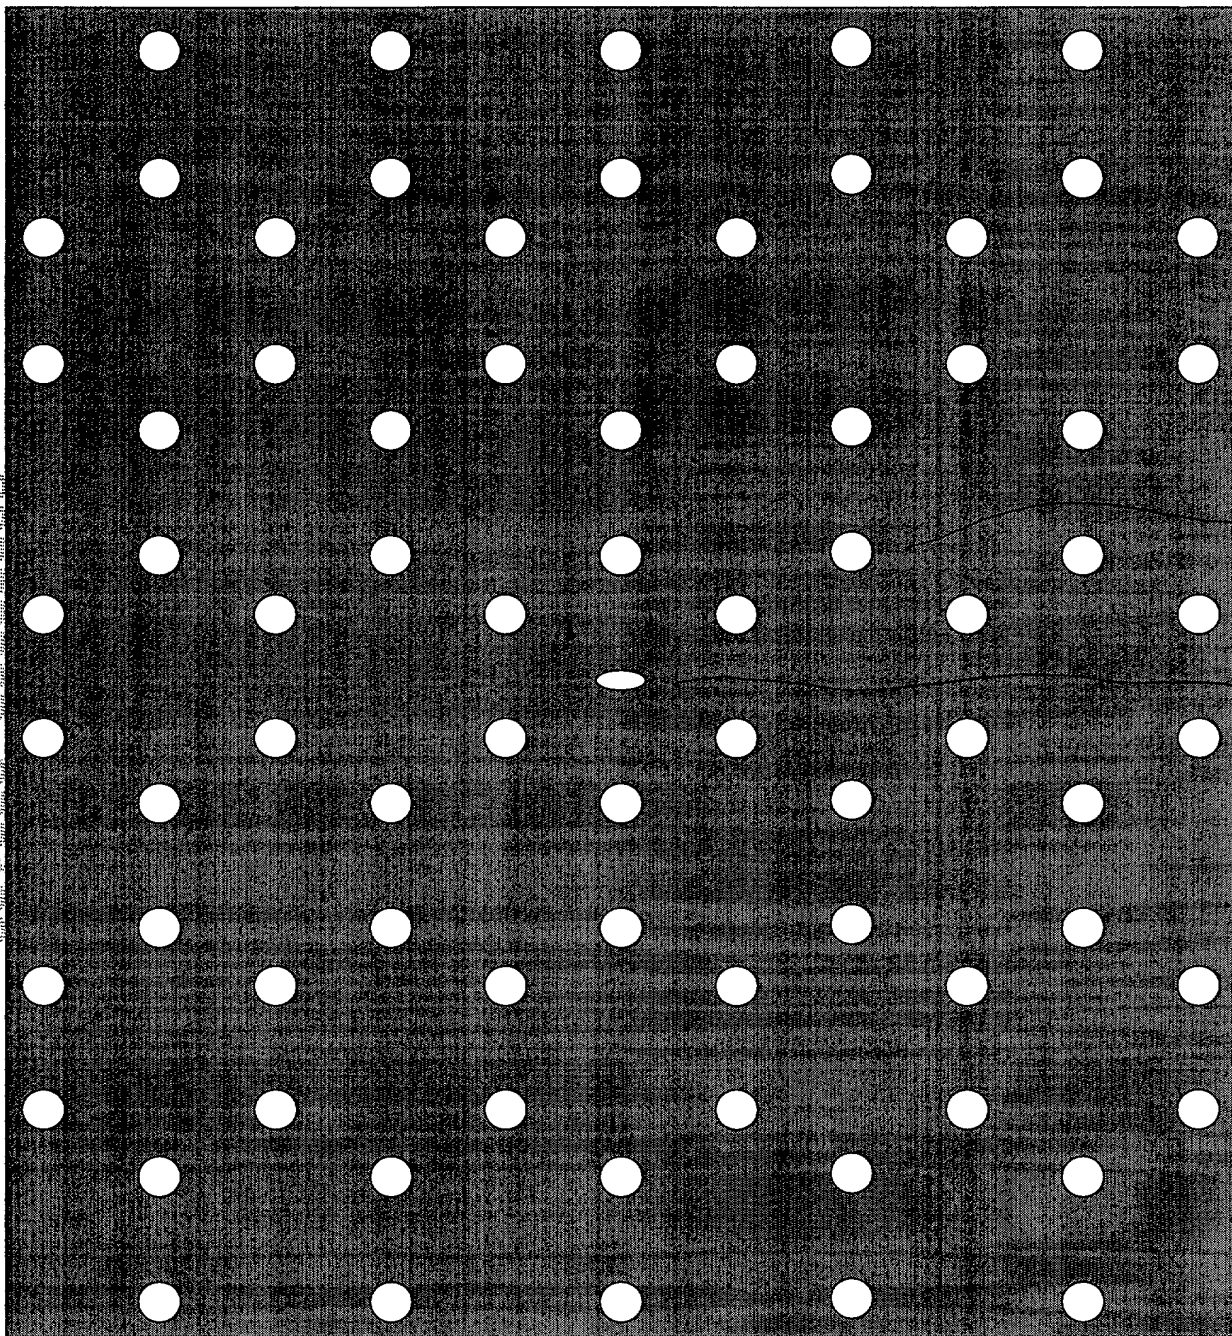


FIG. 75



FIG. 76


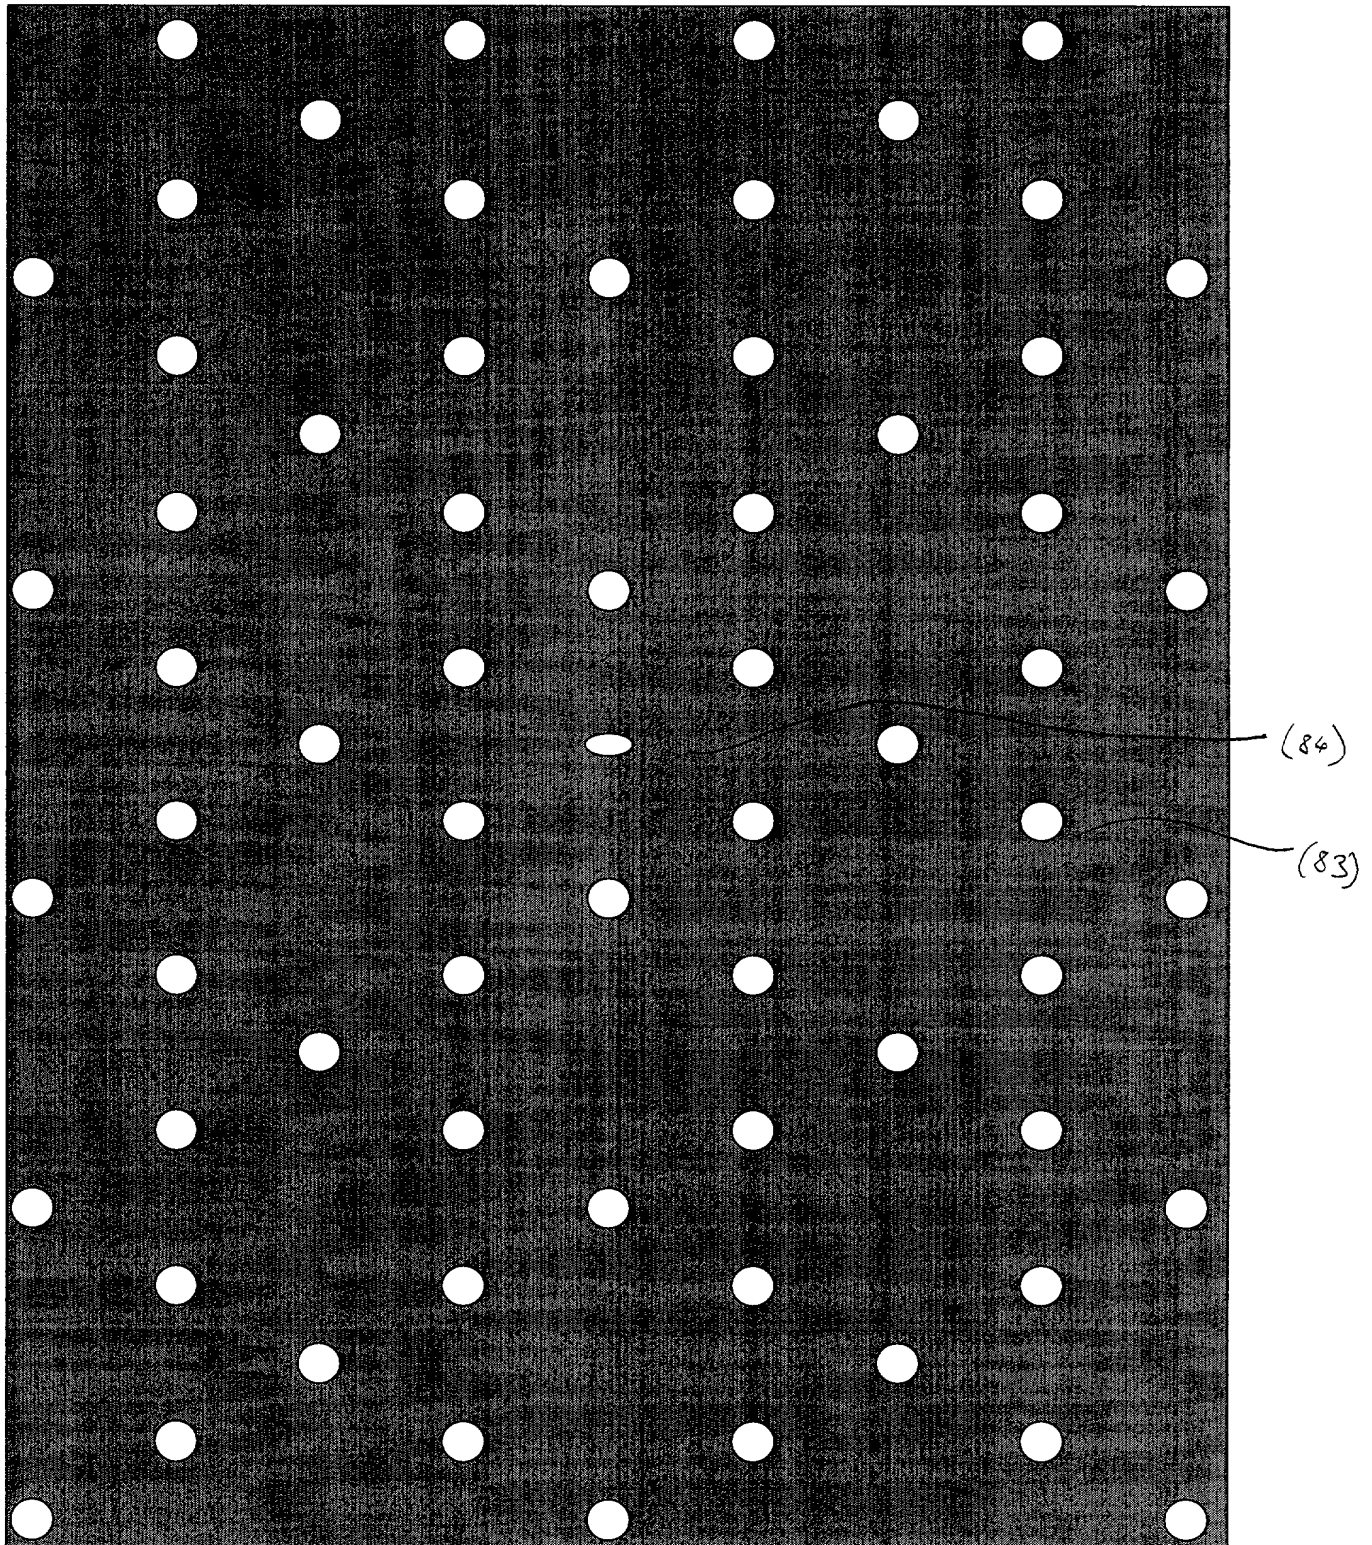


FIG. 76



FIG. 22 is a perspective view of the filter assembly 100, showing the filter media 102, the support structure 104, and the inlet/outlet ports 106. The filter media 102 is a rectangular sheet with a grid of circular holes 108. The support structure 104 is a rectangular frame with a grid of circular holes 110. The inlet/outlet ports 106 are located at the corners of the filter assembly 100.

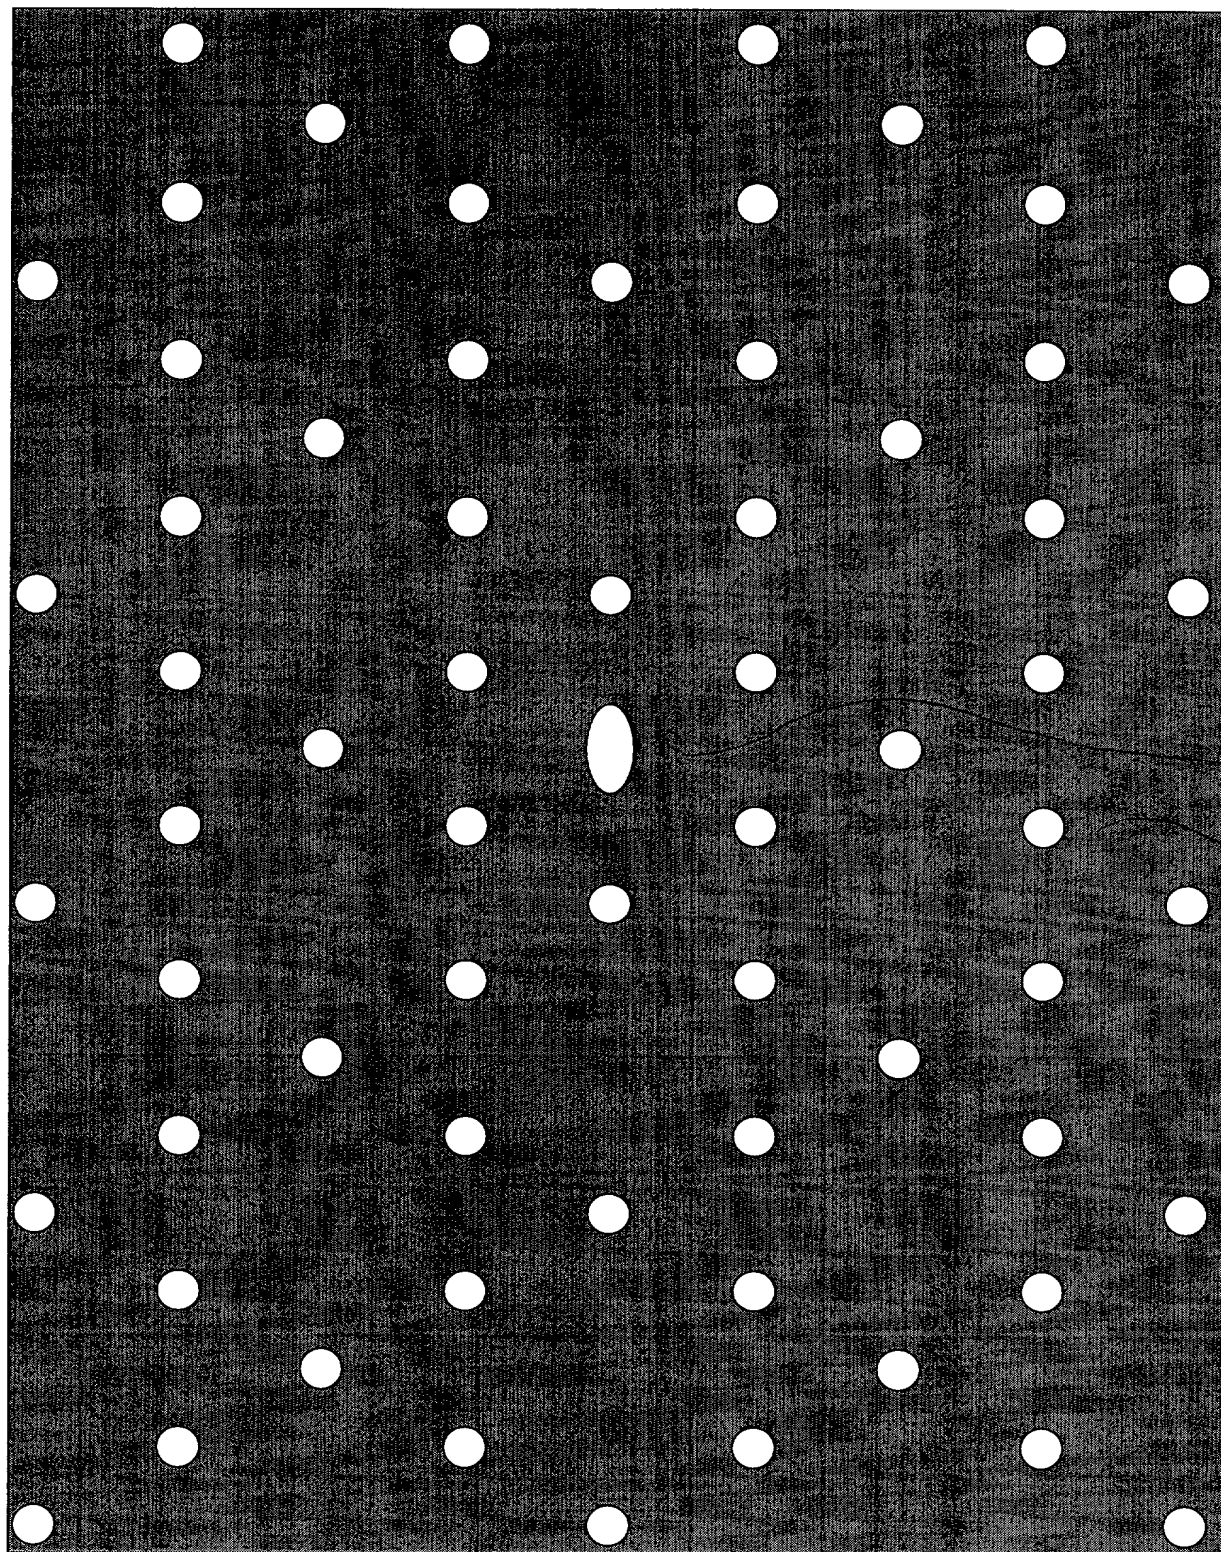

(85)

(83)

FIG. 22




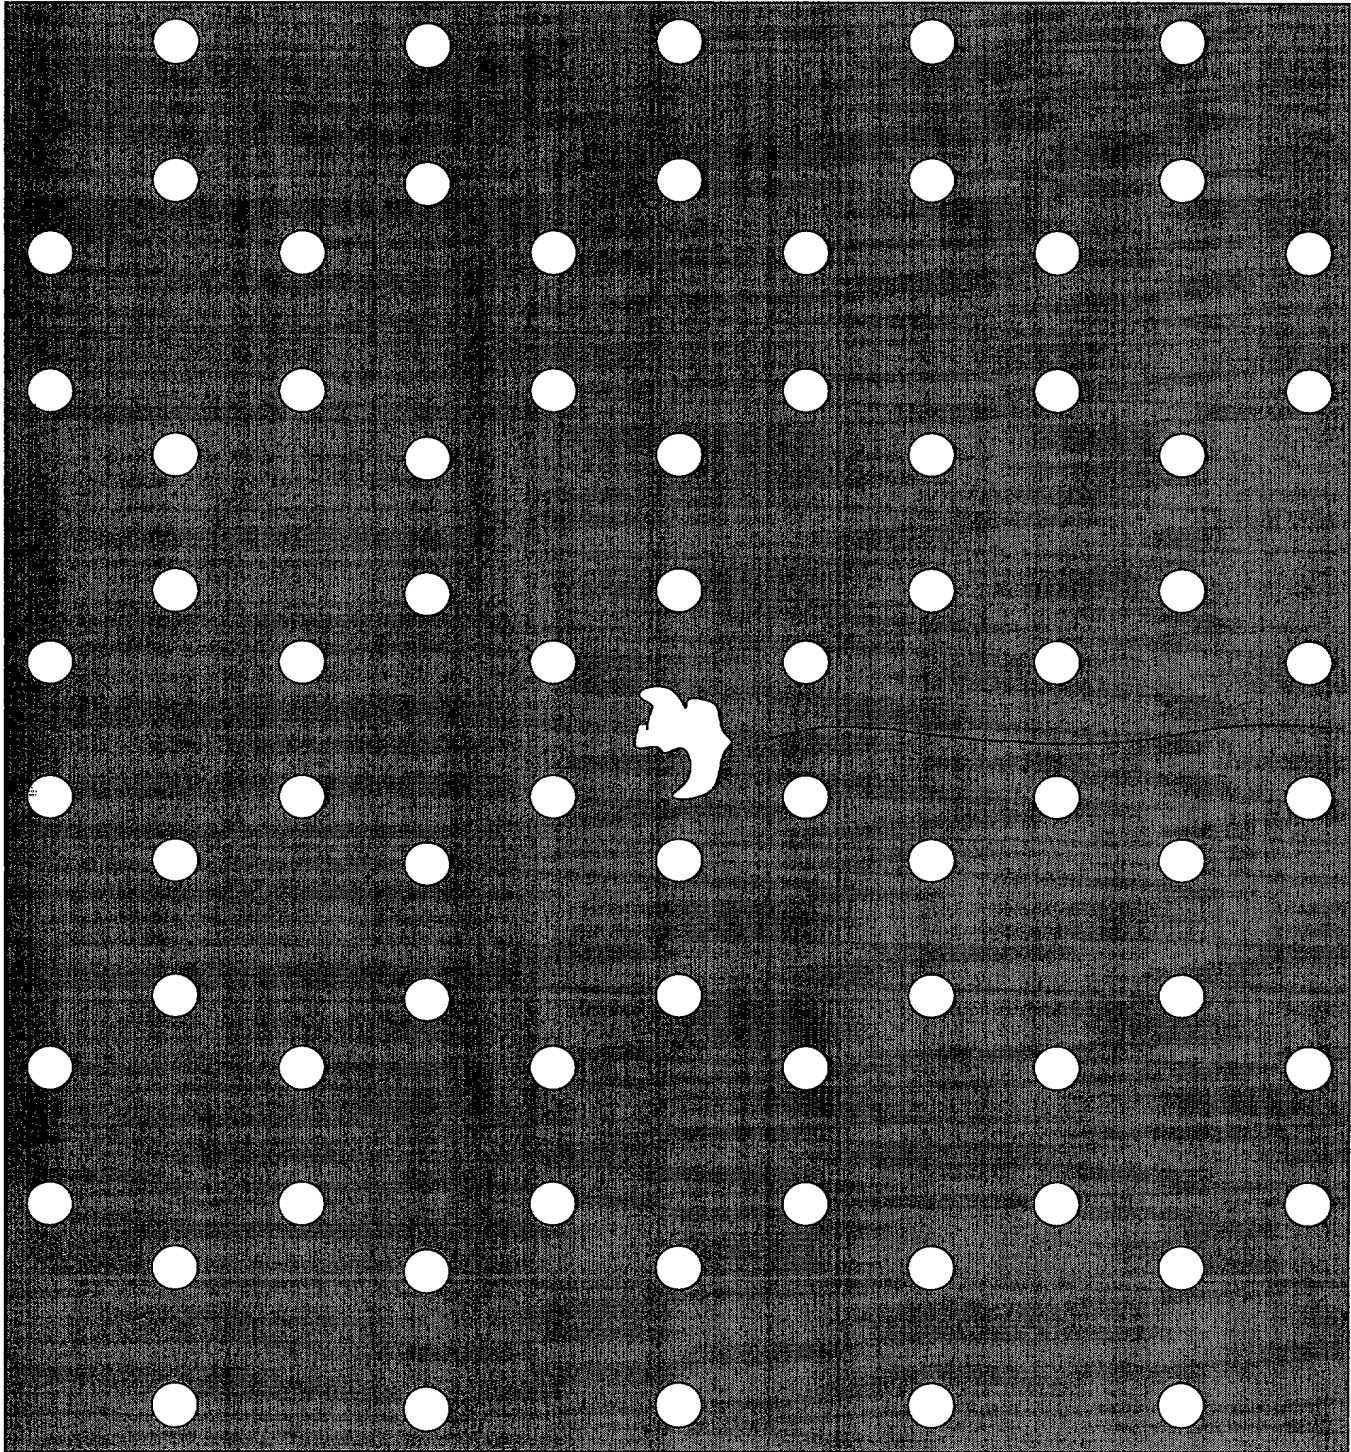


FIG. 78



FIG. 79

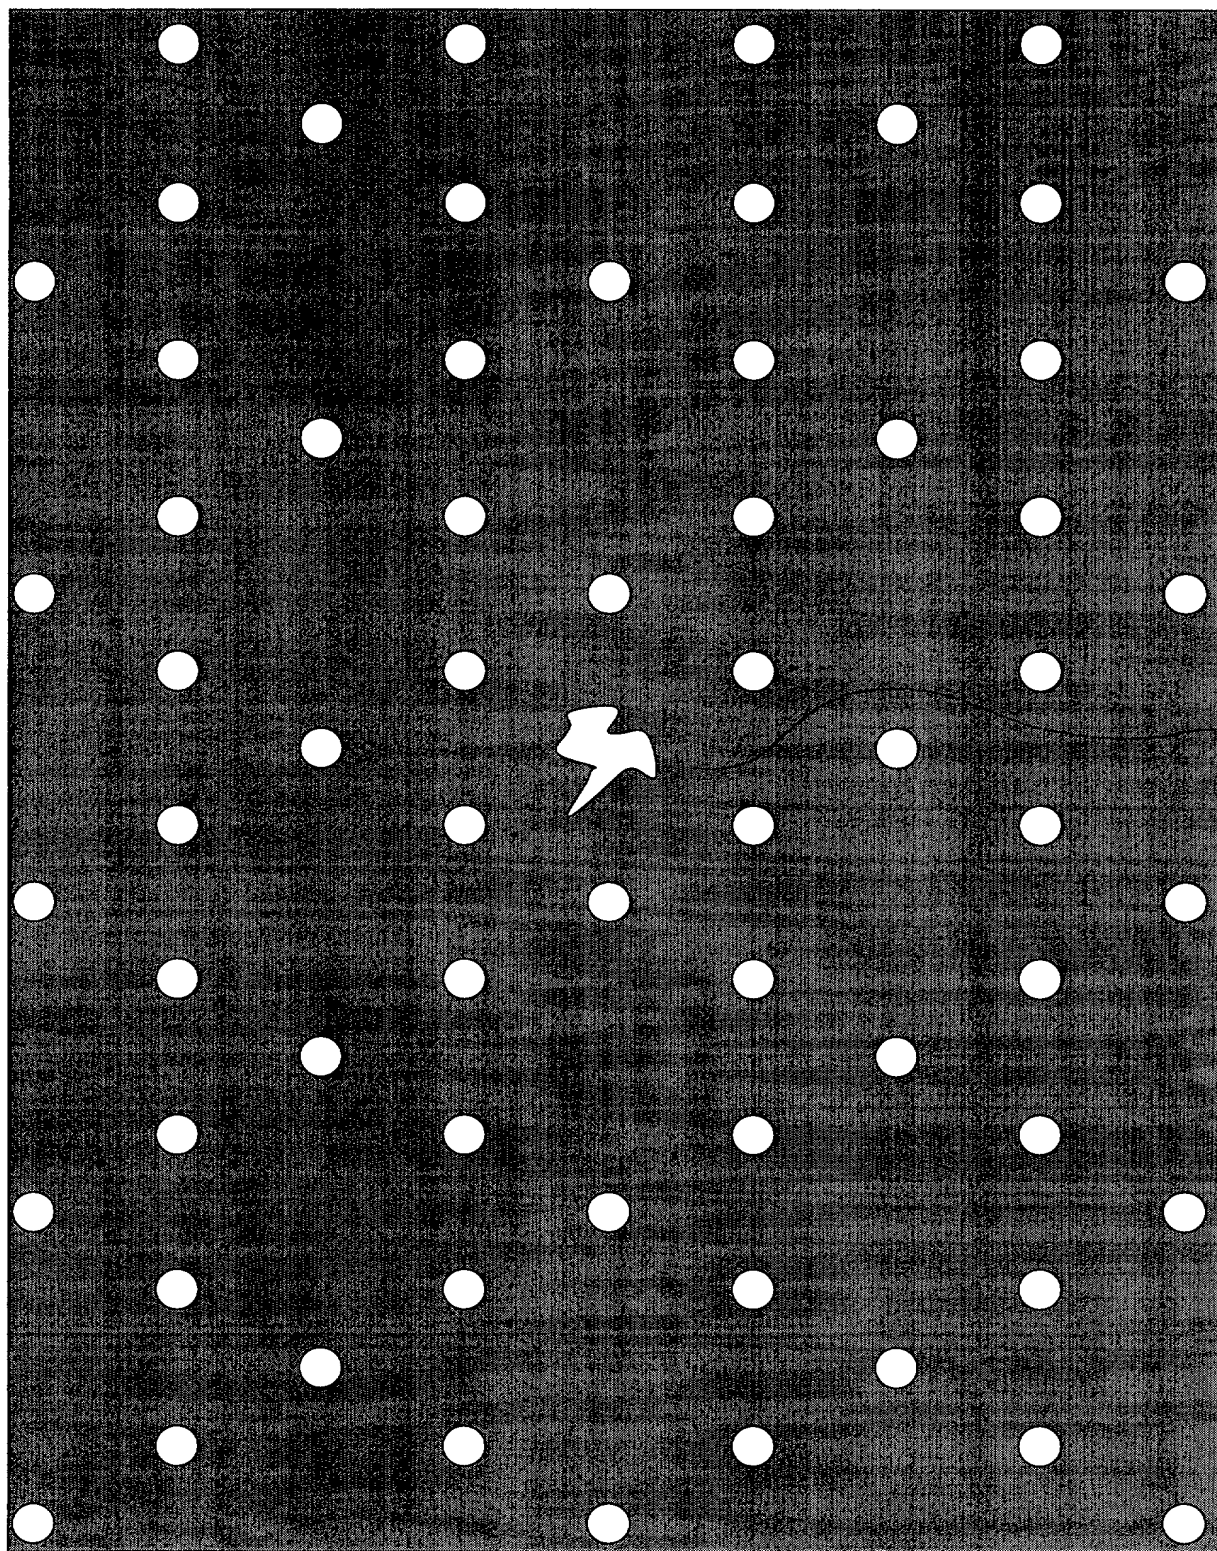

(86)

FIG. 79



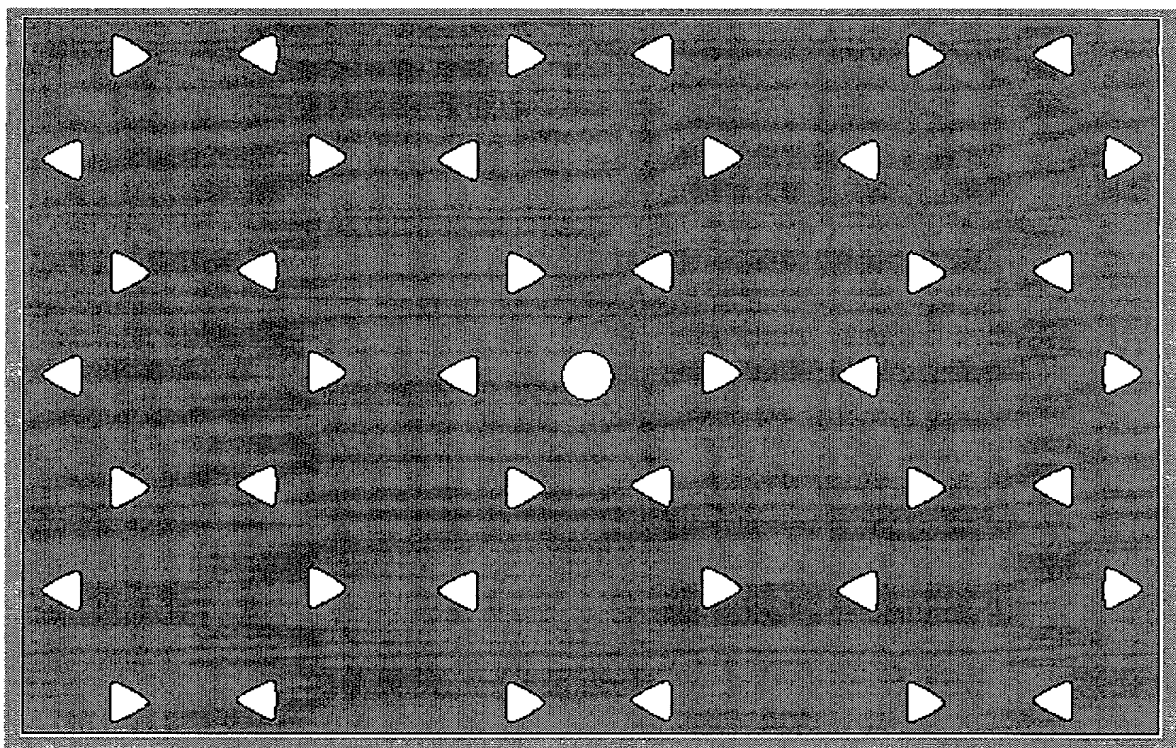


Fig 80







Fig. 82

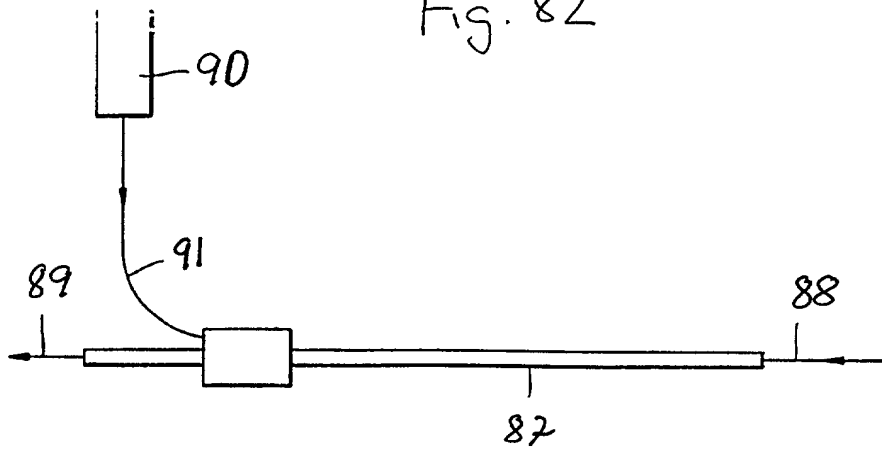


Fig. 83

